

Rpt. 11c
 DISCLOSED SECTION
 27561
 Arizona 25059

Lloyd's Register of Shipping.

SURVEYS FOR FREEBOARD.

No 372

BT. COPY WRITTEN

PARTICULARS IN RESPECT OF STEAM SHIPS HAVING SPAR OR AWNING DECKS.

Port of Survey Kobe
 Date of Survey Dec 1918
 Name of Surveyor A. L. Jones

Kanaki Dkyd No 431.

Ship's Name. <u>Fuku Maru</u> in Register Book	Port of Registry and Nationality. <u>Kobe</u> <u>Japanese</u>	Official Number. <u>24087</u>	Gross Tonnage. <u>5857.42</u>	Date of Build. <u>1919-1</u>	Particulars of Classification. <u>+100A.1. Shelter D. with fb. recommended</u>
--	---	----------------------------------	----------------------------------	---------------------------------	---

LENGTH.	BREADTH.	DEPTH.	UNDER DECK Tonnage.
<u>385.0</u>	<u>51.24</u>	<u>25.6</u>	<u>4200</u>
<u>384.6</u>	Frame Depth <u>9</u> Rule " <u>6/3</u> <u>--.5</u>	Ceiling <u>+ .20</u> Sheer <u>+ .88</u> <u>level tank</u>	Peak Tanks
<u>384.6</u>	<u>50.7</u>	<u>26.68</u>	<u>4200</u>

Moulded Depth as measured 28'-0" Main Deck.
 " " " 36'-0" Spar or Awning Deck.

NOTE.—If the depth is measured when vessel is afloat, the details of measurement should be reported.

Percentage of fitness 81
 Modification necessary [a. 4 (a) to (e)*] } .02 DB.
 Amount as corrected79

CORRECTION FOR LENGTH:—

Length of Ship on Load Line....	<u>384.6</u>
Length in Table	<u>336.0</u>
Difference	<u>48.6</u>
Correction for 10ft.....	<u>1.4</u>
× Difference ÷ 10 =	<u>3.4</u>

+ 3 1/2

Correction for strength in excess of Lloyd's rules = 2'-0"

Particulars—
Three steel decks
side plate increases in thickness
deep rib angle framing and
webs in tween decks.

Height of 'Tween Decks.....	<u>8'-0"</u> (From top of beam to top of beam at side)
Correction for Height of 'Tween Decks in Spar-decked Ships.....	
Freeboard Table R C	<u>3'-8 1/4"</u>
Correction for Length.....	<u>+ 3 1/2</u>
Correction for Height of 'Tween Decks in Spar-decked Ships.....	<u>3'-11 3/4"</u>
Correction for Strength in excess of Lloyd's rules.....	<u>2'-0"</u> <u>1'-11 3/4"</u>
Correction for Iron Deck if required.....	<u>- 3 1/2</u>
Other Corrections (if any).....	<u>measured from Awning Dk. + 8-0</u>
Winter Freeboard.....	<u>9'-8 1/4"</u>
Summer Freeboard	<u>9'-1 3/4"</u>
Indian Summer Freeboard.....	<u>8'-7 1/4"</u>
N. A. Winter Freeboard.....	

Stem 110" at 1/4 length from Stem 61
 Sternpost... 50 " " " Sternpost... 27
 Drop in Sheer abaft amidships.....

Spar-deck Beam..... 12 3/4
 Main-deck " 12 3/4

Length	×	Height.	State if open or closed at ends.
.....	×
.....	×
.....	×

Correction necessary because clearside amidships measured in accordance with the Statute is not taken at intersection of the ~~wood~~ iron deck with side } + 1 3/4

Winter Freeboard from Deck Line	<u>9'-10"</u>
Summer " " "	<u>9'-3 1/2"</u>
Indian Summer " " "	<u>8'-9"</u>
N. A. Winter " " "	

FREEBOARD recommended amidships from centre of Disc to top of Statutory Deck Line, ~~Wood~~ (Iron) Deck:—

Fresh Water Line above centre of Disc ...	<u>9'-3 1/2"</u>
Indian Summer Line " " "	<u>7'-6 1/2"</u>
Winter Line below " " "	<u>6 1/2"</u>
Winter North Atlantic Line " " "	

NOTE.—All vessels equal in strength to Lloyd's Spar-decked rule, or which, although in excess of that rule, do not come up to Lloyd's requirements for Ships of full scantlings to the upper deck, are to be considered as Spar-decked Ships, the freeboard for which will vary with their strength.
 All vessels equal in strength to Lloyd's Awning-decked rule, or which, although in excess of that rule, do not come up to Lloyd's requirements for a Spar-decked Vessel, are to be considered as Awning-decked Ships, the freeboard for which will vary with their strength.
 * If the frames, skin planking, or ceiling are of unusual thickness the breadth of vessel to inside of ceiling should be reported if possible.

e.12,16 T.


008201-008210-0115



Do all the Frames extend to the top Height in the Spar deck? Awning deck?
 Do all the Frames extend to the top height in the Poop? Bridge House? Forecastle?
 To what height do the Reverse Frames extend?
 Has the Poop an efficient Iron Bulkhead at the fore end?
 Give particulars of the means for closing the openings in Bulkhead
 Is the Poop connected with the Bridge House? Has the Bridge House an efficient Bulkhead at the fore end?
 Give particulars of the means for closing the openings in Bulkhead
 What is the thickness of the Bridge Front plating? and Coaming plate?
 Give scantlings and spacing of the Stiffeners
 Are bracket plates fitted at each end of the Stiffeners? Are hor'l. brackets fitted connecting Bridge Bulk'd. with Bulwarks?
 Has the Bridge House an efficient Iron Bulkhead at the after end?
 How are the openings closed?
 Is the Forecastle at least as high as the main or top-gallant rail? Has the Forecastle an efficient Iron or Wood Bulk'd. at after end?
 Are the Engine and Boiler openings covered by a Bridge, Poop, or enclosed by a Strong Iron or Steel Deckhouse?
 If the openings are not so protected are the exposed parts of the Casings efficiently constructed?
 Give thickness of plating; scantlings and spacing of Stiffeners
 What is the height of the exposed Casings? Are suitable means provided for closing all openings in them in bad weather?
 Are the Weather Deck Hatchways efficiently constructed and at least equal to the requirements of Section 28 of the Rules for 1904-5? Give particulars below:—

Position and Size.	No. 1. 27'-7 1/2" x 18'-0"		No. 2. 31'-10 1/2" x 18'-0"		No. 3. 12'-9" x 16'-0"		No. 4. 31'-10 1/2" x 18'-0"		No. 5. 27'-7 1/2" x 18'-0"	
Item.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.
COAMING	Height above top of DECK	24	24							
	Thickness	Sides	.444	.444	Same as No. 1.		Same as No. 1.		Same as No. 1.	
		Ends	.444	.444	Same as No. 1.		Same as No. 1.		Same as No. 1.	
SHIFTING BEAMS OR WEB PLATES	Number	5	5	6	6	2	2	6	6	5
	Section and Scantlings	18" x .36	14 x .34	Same as No. 1.		16 x .32	12 x .32	Same as No. 1.		Same as No. 1.
	Material	2 A. 4 x 3 x .444 + 6" flange	4 x 3 x .444	Same as No. 1.		2 A. 3 1/2 x 3 1/2 x .42 + 6" flange	3 1/2 x 3 x .42	Same as No. 1.		Same as No. 1.
* FORE AND AFTERS	Number									
	Section and Scantlings									
	Material									
HATCHES Thickness	3"	3"	3"	3"	3"	3"	3"	3"	3"	
Remarks	Avg. B.A. on Side and Coamings as approved									

* When the Fore and Afters are of wood the depth should be stated from the underside of the hatches.
 (If the sill of the lowest side scuttle will be less than 6 inches above the Indian Summer Load Line if assigned under the tables, state vertical distance from top of deck at side amidships to lower edge of lowest side scuttle.)

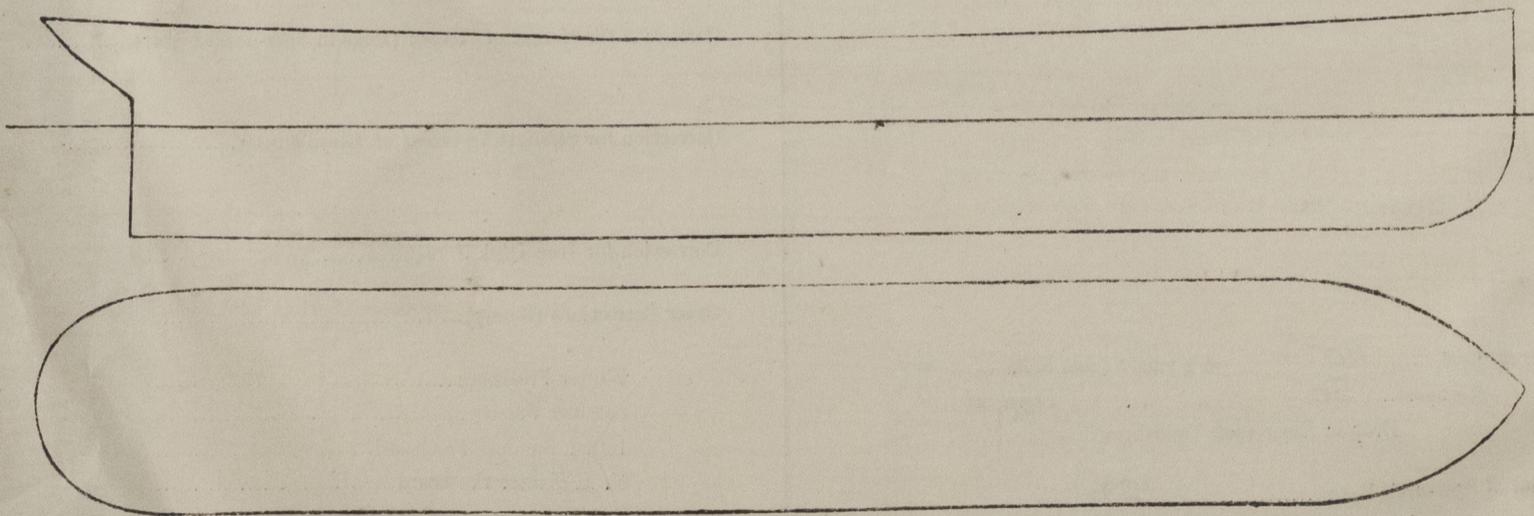

Show hereon line of Floors or Tank Top with position of any Breaks in same; also height of Peak Tank tops, &c., &c.

State any special features in the construction of the Vessel

Owners

Address

Fee £

Received by me



© 2020

Lloyd's Register Foundation

11b
 net
 PAR
 TOP
 VIT
 Ma
 fun
 regis
 nsion
 's Re
 engtl
 OADL
 ORRE
 MENS
 Co-ef
 Any
 [P
 Co-ef
 Sheer
 at
 Sheer
 Gradu
 Stand
 § If
 Rise
 from
 [Par
 Fal
 Par
 Length
 Freebo
 Correct
 Freebo
 Differ
 Percent
 Jorrecti
 co
 allowan
 forecast
 bridge
 Raised
 oop...
 T
 ength
 orrespo
 (Para.
 REEF
 If the fr
 of cel
 In vessels
 ships
 In fish-c
 post.
 one ei
 G. T.