


Lloyd's Register of Shipping.  
SURVEYS FOR FREEBOARD.  
(CONDITIONS OF ASSIGNMENT.)

26 JUN 1942

Guns Rpt No 21472 A

Ship's Name "T.R.V.1"  
Official Number ✓  
Nationality and Port of Registry ✓

Port of Survey Epsomby  
Surveyor's Signature F. J. Palmer  
Date of Survey 26/3. 1/4 0 18/6/42

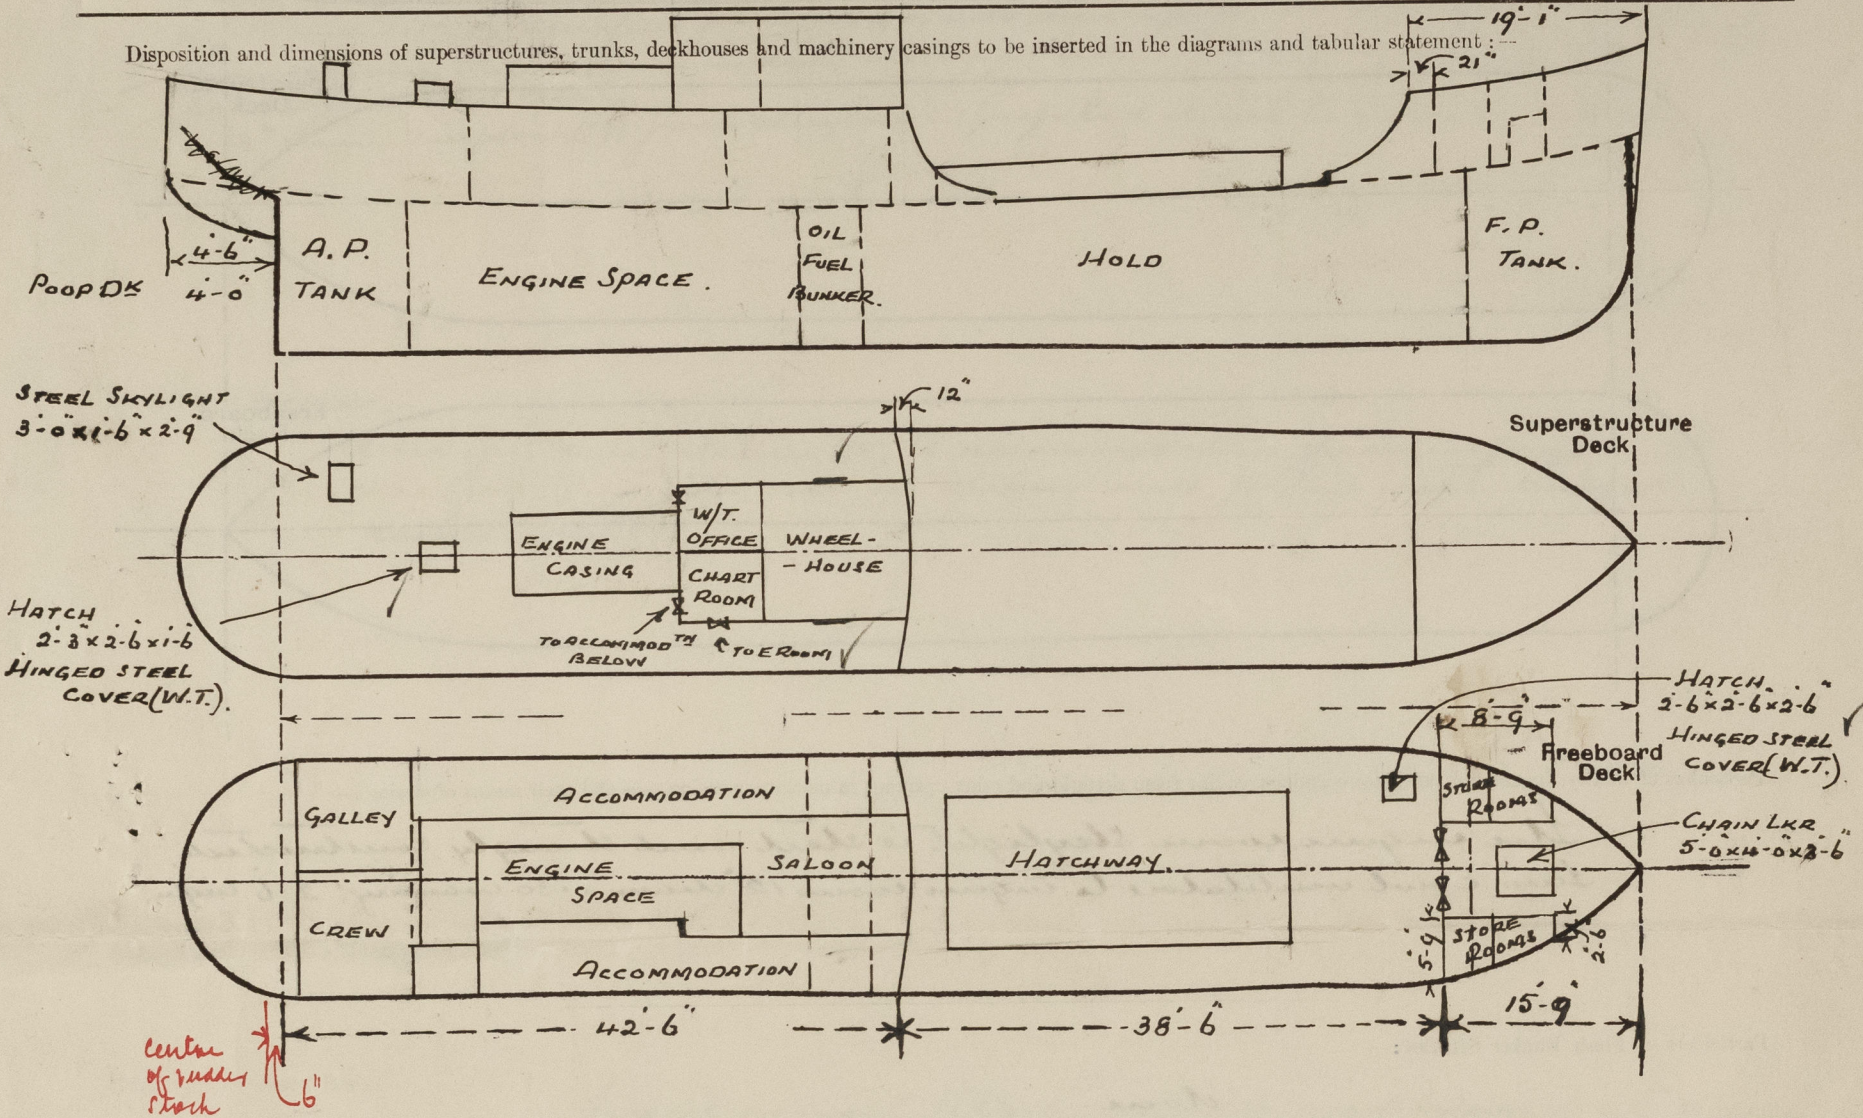


Particulars of Superstructures, Trunks, Casings, Deckhouses.								
	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height of Casings
Poop Bulkhead ... ..	✓	.30	5 x 3 x .375 13a.	31"	AKTS AT BOTTOM LUGS AT TOP	none	✓	7'-0" ✓
Raised Quarter Deck Bulkhead ...								
Bridge, After Bulkhead ... ..								
Bridge, Forward Bulkhead ... ..								
Forecastle Bulkhead ... ..	✓	.20	2 1/2 x 2 1/2 x .25 ✓	25" ✓	none	(2) 4'-0" x 3'-6"	15'	6'-6" ✓
Trunk, Aft ... ..								
Trunk, Forward ... ..								
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...								
Exposed Machinery Casings on Superstructure Decks ... ..	✓	.25	2 1/2 x 2 1/2 x .25	21" ✓	AKTS AT TOP ONLY	(2) 4'-7" x 1'-9" (3s) 18" (1) 4'-7" x 1'-9" (ps) 18"	✓	3'-0" ✓
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ... ..								
Deckhouses on Flush Deck Ships ...								

Particulars of Closing Appliances (state if capable of being manipulated from both sides).	
Poop Bulkhead ... ..	✓ No openings.
Raised Quarter Deck Bulkhead ...	
Bridge, After Bulkhead ... ..	
Bridge, Forward Bulkhead ... ..	
Forecastle Bulkhead ... ..	2 3/8" SHIFTING 130ARDS IN ANGLES FORMING CHANNELS RIVETED TO 13ULKHEAD. ✓
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	✓
Exposed Machinery Casings on Superstructure Decks ... ..	Three hinged steel doors, operated from both sides: Two horizontal sliding steel doors to wheelhouse 5'-6" x 1'-10". ✓
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ... ..	✓
Deckhouses on Flush Deck Ships ...	✓



### PARTICULARS OF PROTECTION TO OPENINGS, ETC.

The following diagrams should be used to indicate the positions of cargo and coaling hatchways, gangway, cargo and coaling ports, ventilators, companionways, etc., which would affect the seaworthiness of the ship :—

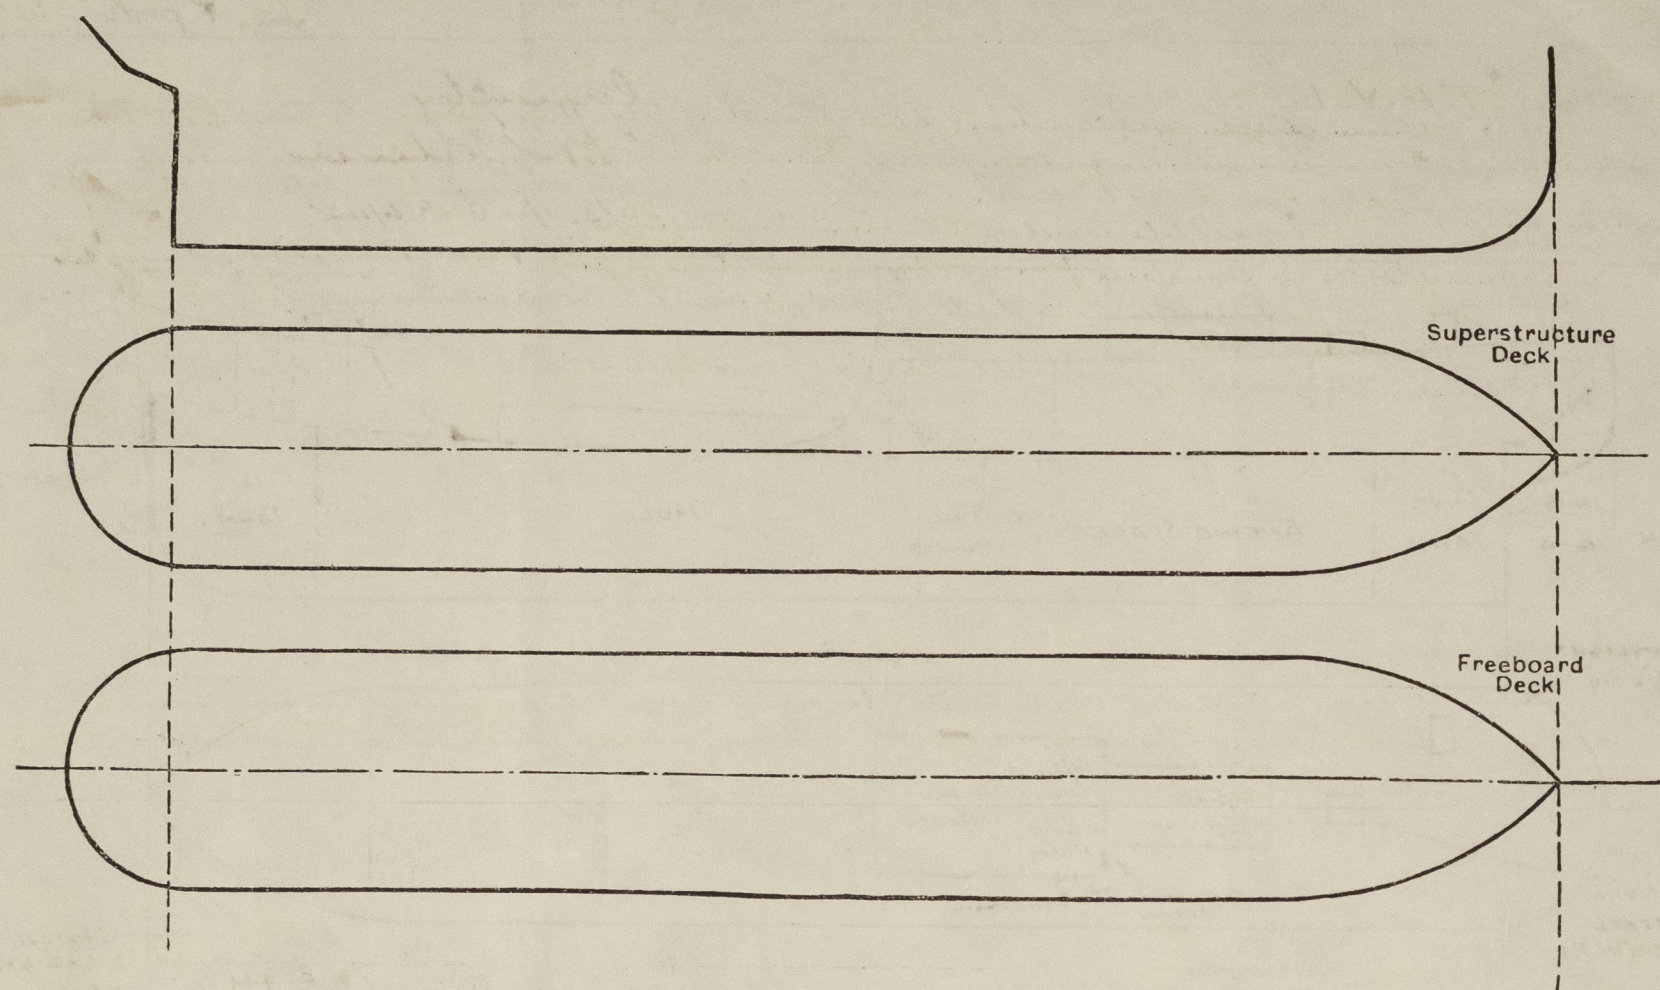

Particulars of fiddley, funnel and ventilator coamings, engine room skylight and other openings in machinery casing tops and their means of closing :—

The engine room skylight is steel and strongly constructed. Two cowl ventilators to engine room 12" diam x 30 coaming, 2' 6" high.

Particulars of Flush Bunker Scuttles:—

None ✓

Particulars of Companionways :—

None. See Exposed machinery casings and houses on Superstructure deck.

Particulars of Ventilators in exposed positions on freeboard and superstructure decks :—

Two ventilators on file deck 6" diam, coaming 36" led to file space. ✓  
Two " " preboard " 12" " " 36" " " hold. ✓  
Four " " prop " 6" " " 30" " " prop space. ✓

All ventilators are constructed in accordance with the Rules and provided with wood plugs and canvas covers.

Particulars of Air Pipes in exposed positions on freeboard, raised quarter, or superstructure decks :—

One C. I. air pipe on file deck 2'-0" high x 3" diam to F.P. tanks.  
One " " " " prop " 1'-6" " x 3" " " A.P. " ✓  
Two " " " " foreboard " 3'-3" " x 2½" " " F.V. tanks.

Wood plugs with chain attachments are provided for closing the openings.

Particulars of Gangway Cargo and Coaling Ports:—

None

Particulars of Scuppers and Sanitary Discharge Pipes :—

2- 4" diam discharge (sanitary) pipes from W.C.'s in poop space on port side, two automatic non-return valves fitted to each discharge. Ship's side valves (gun. ventab.) about 3'-6" below freeboard deck in machinery space. Upper valves are accessible under various conditions.

4 (ft) and 2 (st) 1 1/2" scuppers from galley or wash places in poop led through automatic non-return valves (gun. ventab.) on ship's side in machinery space, about 3'-6" below freeboard deck.

2- 3" diam scuppers (st) from alleyway in poop led direct to engine room bilge.

Particulars of Side Scuttles :—


Nine (9) and eleven (11) to accommodation spaces in poop and  
one (1) in file, all 10" diam and fitted with binged  
deadlights.

Vertical distance of Sill of lowest Side Scuttle above top of keel

14-2

### Particulars of Guard Rails :—

Fixed round pile and poof and linged at sides  
of foreboard deck.



Particulars of Gangways, Lifelines, etc.:—


Lifeline filtered from proofs to file (pres)

Particulars of Freeing Arrangements.						
	Length of Bulwark	Height of Bulwark	Size of Freeing Ports	Number each side	Area each side	Rule area each side
After Well ... ..						
Forward Well ... ..		✓	None.			

State position of each freeing port ... .. { After Well :—  
(F. and A. position and height above deck edge) { Forward Well :—

State whether the freeing ports are fitted with shutters, bars, or rails, and give particulars of such :—

Additional area where sheer is less than standard.



© 2021  
Lloyd's Register  
Foundation



# PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS.									
FREEBOARD DK POOP DK									
Description of Hatchway	...	...	...	MAIN	HATCH TO STORE	TO ACCOMM SPACE			
Dimensions of Hatchway	...	...	...	24'-6" 11'-6"	2'-6" x 2'-6"	2'-3" x 2'-6"			
COAMINGS	{	Height above Deck	...	2'-8"	.375"	.375"			
		Thickness	...	.375"					
		Stiffeners	...	6 x 3 x 3/8	12 x 3 1/2 x 3/8				
		Brackets, Stays	...	30"	20"				
HATCH BEAMS	{	Number	...	3	None				
		Spacing	...	6'-1"					
		Scantling and Sketch	...	15" @ center 9 3/4" - ends	3 x 3 x 1/4				
		Bearing Surface	...						
FORE AND AFTERS	{	Number	...		None				
		Spacing	...						
		Unsupported Lengths	...						
		Scantling* and Sketch	...						
HATCH COVERS	{	Material	...	Fir	Steel				
		Thickness	...	2 1/2"	W.T.				
		How fitted	...	F & A					
		Bearing Surface	...	2 1/2"					
Spacing of Cleats	...	...	...	24"					
Number of Tarpaulins	...	...	...	2					
<p>*Are wood fore and afters steel shod at all bearing surfaces? <input checked="" type="checkbox"/></p> <p>Are battens and wedges efficient and in good condition? <input checked="" type="checkbox"/></p> <p>Are tarpaulins in good condition and in accordance with rule requirements? <input checked="" type="checkbox"/></p> <p>Are lashings provided in accordance with rule requirements? <input checked="" type="checkbox"/></p>									

Particulars of any special features :—

Endorsement at first survey and at surveys for renewal of Certificate :—

The fittings and appliances are in accordance with the particulars shown on this form (or as now modified) and are in good condition.



© 2021

Lloyd's Register Foundation