

Lloyd's Register of Shipping.

SURVEYS FOR FREEBOARD. STEAM SHIPS.

PARTICULARS RELATING TO ALL STEAM SHIPS EITHER FLUSH DECKED, OR WITH TOP GALLANT FORECASTLES, SHORT POOPS AND BRIDGE HOUSES DISCONNECTED, OR WITH TOP GALLANT FORECASTLES HAVING LONG POOPS, OR RAISED QUARTER DECKS CONNECTED WITH BRIDGE HOUSES, OR OTHERWISE.

Port of Survey London.
Date of Survey 10-5-32
Name of Surveyor

Disc S.B. Co No 208

Ship's Name <u>"TOSCA"</u>	Port of Registry and Nationality <u>Cypr British</u>	Official Number <u>99438</u>	Gross Tonnage <u>449</u>	Date of Build <u>1908-6</u>	Particulars of Classification <u>+100 A-1</u>
Number in Register Book <u>36403</u>					

Registered dimensions from Ship's Register	LENGTH. <u>155.4</u>	BREADTH. <u>25.65</u>	DEPTH. <u>11.10 6</u> <u>Norm. 11.42</u>	UNDER DECK TONNAGE. <u>324.36</u>
Length on	<u>154.8</u>	Frame Depth 3 Rule " 3	Ceiling Sheer <u>4.26</u>	Peak Tanks
	<u>154.8</u>	<u>25.65</u>	<u>11.68</u>	<u>324.36.</u>

Moulded Depth as measured..... 12' 3"
Addition for Keel below base line for draught record..... inches.

NOTE - If the depth is measured when vessel is afloat, the details of measurement should be reported.

CORRECTION FOR LENGTH.

Length of Ship on Loadline.....	<u>154.8</u>	
Length in Table	<u>147</u>	
Difference	<u>7.8</u>	
Correction for 10ft., Table A.	<u>-9</u>	Table C.
× Difference divided by 10	<u>.78</u>	(if required.)
If 1/10ths length covered divide by 2	<u>+ 1/4</u>	

P. No. 7499 CORRECTION FOR IRON DECK.

Proportion covered, if less than 1/10ths length covered
Thickness of usual wood deck, less stringer 3" - 3"

CORRECTION FOR ROUND OF BEAM.

Breadth at Gunwale amidships.....	<u>25.3</u>	
Round of Beam	<u>6 1/2</u>	
Normal round.....	<u>6 3/8</u>	
Difference	<u>÷ 2 =</u>	
Proportion of Deck uncovered (Para. 19)		<input checked="" type="checkbox"/>

NOTE - The round of beam should be reported on the full breadth of vessel at the gunwale.

of fineness..... .4
 tion necessary }
 to (e)]* }
 corrected4

..... 45 } 70 ÷ 2 = 35 ...Mean
 ost ... 25 }

he length from { Stem 25 } 39 1/2 ÷ 2 = 19.75...Mean
 { Sternpost 14 1/2 }

Sheer [Table, Para. 18] 25.48 Correction
 Difference..... 9.52 ÷ 4 = -2 1/2
 Para. 18 (f)

At front of bridge house.....
 At after end of forecastle

÷ 2 =
 Correction

ALLOWANCE FOR DECK ERECTIONS :-
 le C..... 3 1/4
 Length, if required (Para. 12, 13, and 14)

Table A, corrected for sheer, and for length, } 1 - 6 1/2
 required (Para. 11, 12, 13, and 14) }
 below..... 63.7 1/2
- 9 3/4

R. Q. Dk. if engine and boiler openings not			
bridge house (Para. 11)		<u>+ 1/4</u>	
Deck Erections		<u>- 9 1/2</u>	
Length.	Length allowed.	Height.	
<u>23.0</u>	<u>21.17</u>		
<u>8.75</u>	<u>9.92</u>		
<u>10.50</u>	<u>8.63</u>		
<u>86.3</u>			
	<u>117.39</u>	<u>= .758</u>	
	<u>154.8</u>		

percentage }
18, or 11) } 63.7

Freeboard, Table A	<u>1' 9"</u>
Correction for Sheer	<u>- 2 1/2</u>
Correction for Length	<u>+ 1' 6 3/4"</u>
Allowance for Deck Erections	<u>- 9 1/2</u>
Correction for Round of Beam.....	<u>0' 9 1/4"</u>
Correction for fall in Sheer (if any).....	
Correction for Steel Deck (if required)	<u>- 3</u>
Additions for non-compliance with provisions of } Para. 11 (d) and (e) †	
Other Corrections (if any) } <u>for height of Raised Quarter Deck.</u>	<u>4' - 0"</u> <u>4' - 6 1/2"</u>
Winter Freeboard	<u>4' - 6 1/4"</u>
Summer Freeboard	<u>4' - 4 3/4"</u>
Indian Summer Freeboard	<u>4' - 3 1/4"</u>
N. A. Winter Freeboard	<u>4' - 8 3/4"</u>
Correction necessary because clearside amidships, measured in accordance with the Statute is not taken at the intersection of the wood or steel deck with side.	<input checked="" type="checkbox"/>
Winter Freeboard from deck line	
Summer " " " "	
Indian Summer " " " "	
N. A. Winter " " " "	

WINTER FREEBOARD amidships from Centre of Disc to top of Deck Line, <u>Wood, Steel, Deck:</u>	
Tropical Fresh Water Line above Centre of Disc ... <u>4 3/4</u>	Tropical Fresh Water Freeboard ... <u>4' - 4 1/2"</u>
Fresh Water Line " " ... <u>3 1/4</u>	Fresh Water " " ... <u>4' - 1 1/4"</u>
Tropical Line " " ... <u>1 1/2</u>	Tropical " " ... <u>4' - 3</u>
Winter Line below " " ... <u>1 1/2</u>	Winter " " ... <u>4' - 6"</u>
Winter North Atlantic Line " " ... <u>4 1/4</u>	Winter North Atlantic " " ... <u>4' - 8 3/4"</u>

F.W. = $\frac{980}{40 \times 7.8} = 3.13 = 3 1/4$

87-B
11-5-32

1932

© 20 Lloyd's Register
MARKING FORM

RECEIVED 3 JAN 1933

Do all the Frames extend to the top height in the Poop? _____ Raised Quarter Deck? _____ Bridge House? _____ Forecastle? _____

To what height do the Reverse Frames extend? _____

Has the Poop or Raised Quarter Deck an efficient Iron Bulkhead at the fore end? _____

Give particulars of the means for closing the openings in Bulkhead _____

Is the Poop or Raised Quarter Deck connected with the Bridge House? _____ Has the Bridge House an efficient Bulkhead at the fore end? _____

Give particulars of the means for closing the openings in Bulkhead _____

What is the thickness of the Bridge Front plating? _____ and Coaming plate? _____

Give scantlings and spacing of the Stiffeners _____

Are bracket plates fitted at each end of the Stiffeners? _____ Are hor'l. brackets fitted connecting Bridge Bulk'd. with Bulwarks? _____

Has the Bridge House an efficient Iron Bulkhead at the after end? _____

How are the openings closed? _____

Is the Forecastle at least as high as the main or top-gallant rail? _____ Has the Forecastle an efficient Iron or Wood Bulk'd. at after end? _____

Are the Engine and Boiler openings covered by a Bridge, Poop, Raised Quarter Deck, or enclosed by a Strong Iron or Steel Deckhouse? _____

If the openings are not so protected are the exposed parts of the Casings efficiently constructed? _____

Give thickness of plating; scantlings and spacing of Stiffeners _____

What is the height of the exposed Casings? _____ Are suitable means provided for closing all openings in them in bad weather? _____

Are the Weather Deck Hatchways efficiently constructed and at least equal to the requirements of the Rules? Give particulars below:—


Position.	Size.								
COAMING.	Height above top of DECK								
	Thickness { Sides..... Ends.....								
SHIFTING BEAMS OR WEB PLATES.	Number								
	Section and Scantlings								
	Material								
* FORE AND AFTERS.	Number								
	Section and Scantlings								
	Material								
HATCHES Thickness									
Remarks.....									

* The depth of Fore and Afters should be stated from the underside of the hatches in all cases.
(If the sill of the lowest side scuttle will be less than 6 inches above the Indian Summer Load Line if assigned under the tables, state vertical distance from top of keel to lower edge of lowest side scuttle.)

The following information is to be given in all Cases of vessels dealt with under Paras. 11, 12 (under 15 feet Moulded depth) and under Shelter I
What is the thickness of the Bridge Sheerstrake? _____ Strake between Main and Bridge Sheerstrakes? _____

Delete the words { The Crew are, are not, berthed in the bridge house.
that do not apply { The arrangements to enable them to get backwards and forwards from their quarters are, are not satisfactory.

Length of Bulwarks in well _____ = _____ Sq. ft.
Area of Freeing Ports required by Para. 11 (e) each side of vessel _____ = _____ Sq. ft.
Ft. Tenths. Ft. Tenths. No. } Freeing Ports (each side of vessel) _____ = _____ Sq. ft.
 × × }
 × × }
Total deficiency or excess = _____ Sq. ft.

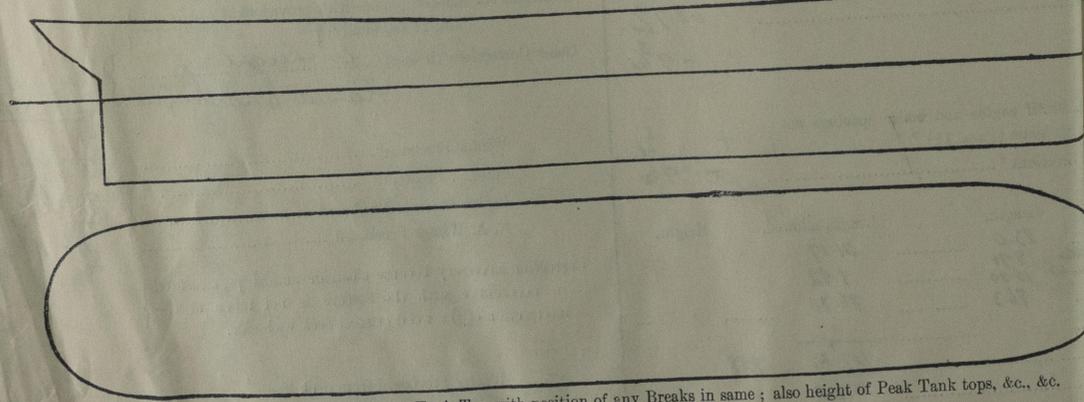

Show hereon line of Floors or Tank Top with position of any Breaks in same; also height of Peak Tank tops, &c., &c.

State any special features in the construction of the Vessel _____

Builder's name and yard number _____

Names of sister vessels _____

Owners _____

Address _____

Fee £ _____ : _____ : _____

Received by me _____



© 2019
Lloyd's Register
Foundation