

Rpt. C.11.


OWNERS' C.11 ISSUED 15 MAR 1954

## Lloyd's Register of Shipping.

Index No. 44110  
(For London Office only.)SURVEYS FOR FREEBOARD. GRO. RPT. No 856  
(CONDITIONS OF ASSIGNMENT.)

Ship's Name INTAN Port of Survey GRONINGEN  
Official Number ✓ Surveyor's Signature [Signature]  
Nationality and Port of Registry INDONESIA Date of Survey JULY, 1953

Disposition and dimensions of superstructures, trunks, deckhouses and machinery casings to be inserted in the diagrams and tabular statement:—

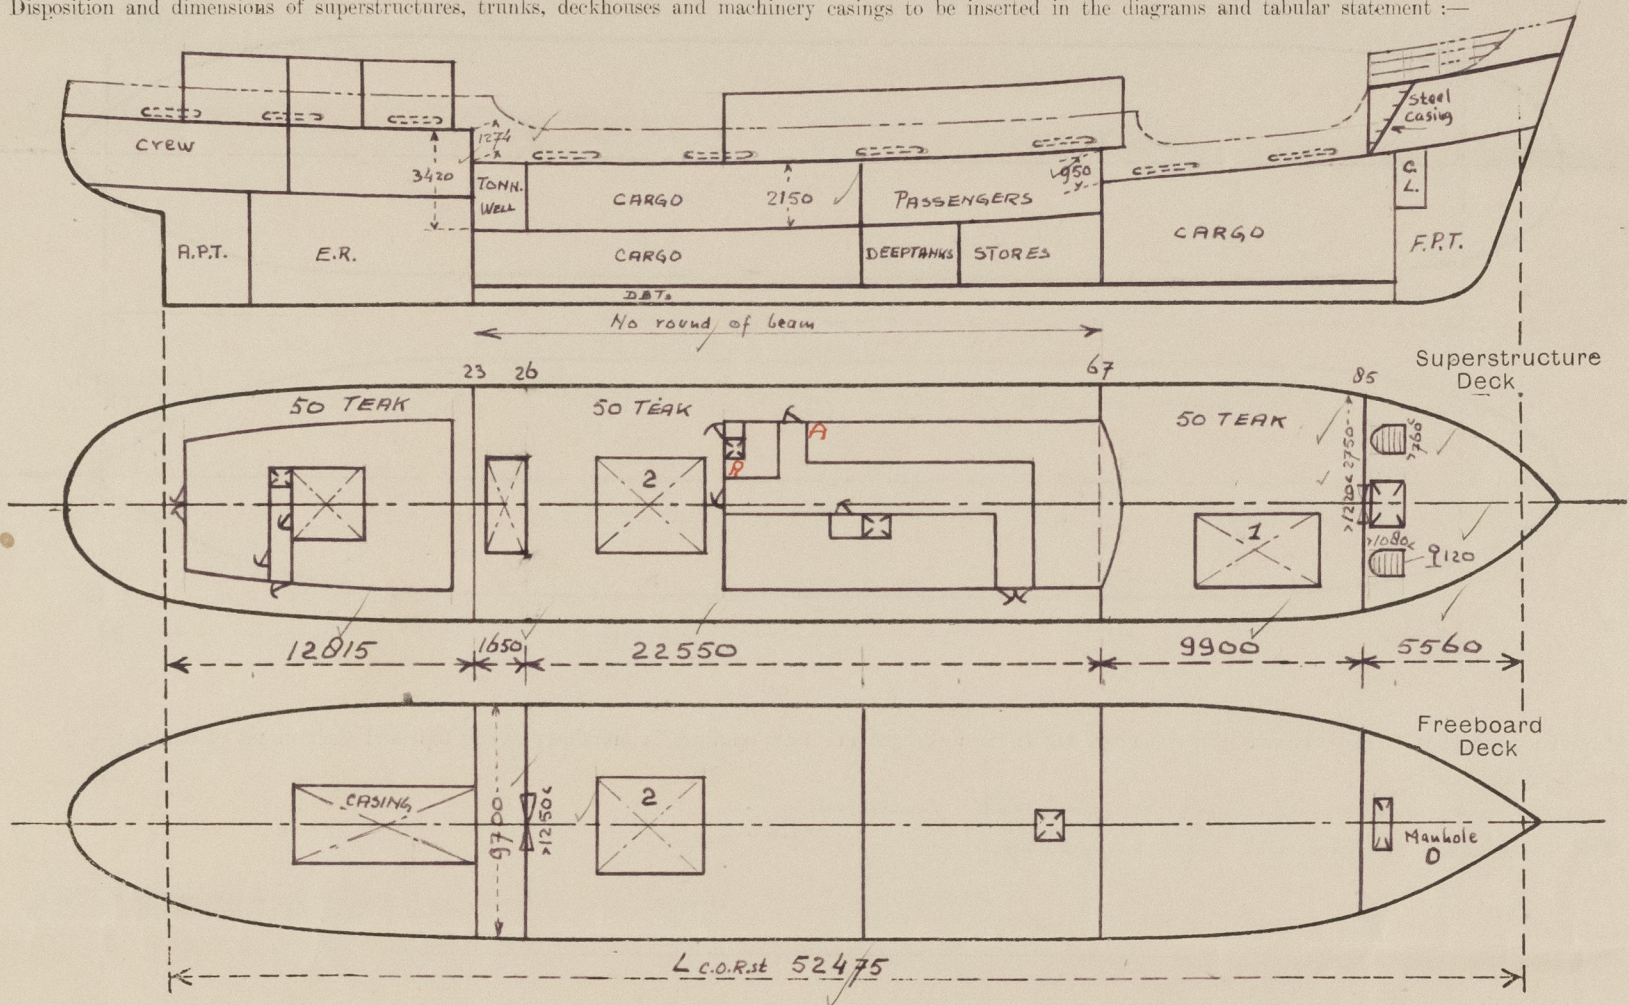

Particulars of Superstructures, Trunks, Casings, Deckhouses.

	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height of Casings
Poop Bulkhead ... frame. 23...	7 ✓	7 ✓	65.50.6 ✓	700 ✓	Brackets ✓	in tact ✓	✓	1274 ✓
Raised Quarter Deck Bulkhead 67	7 ✓	7 ✓	65.50.6 ✓	650/700 ✓	Brackets ✓	4 portholes 12" ✓	230 ✓	950 ✓
Bridge, After Bulkhead ... 26.	6½ ✓	6½ ✓	65.7 ✓	750 ✓	E.W. ✓	1250.1530 ✓	610 ✓	2150 ✓
Bridge, Forward Bulkhead...	✓							
Forecastle Bulkhead... 85.	6 ✓	6 ✓	65.8 ✓	600 ✓	E.W. ✓	1220.1550 ✓	550 ✓	2300 ✓
Trunk, Aft ...	✓							
Trunk, Forward ...	✓							
Exposed Machinery Casings on Freeboard or Raised Quarter Decks...	Protected by steel deckhouse on Poop.							
Exposed Machinery Casings on Superstructure Decks ... 23.	7 ✓	7 ✓	65.50.6 ✓	700 ✓	Brackets ✓	in tact ✓	✓	2150 ✓
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	✓							
Deckhouses on Flush Deck Ships ...	✓							


Particulars of Closing Appliances (state if capable of being manipulated from both sides).

Poop Bulkhead ...	No openings ✓
Raised Quarter Deck Bulkhead ...	Strong deadlights, hinged, permanently attached. Operated by special spanner. ✓
Bridge, After Bulkhead ...	Wood stormboards 3¼" in welded channel. ✓
Bridge, Forward Bulkhead ...	✓
Forecastle Bulkhead...	Wood stormboards 3¼" in welded channel. ✓
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	✓
Exposed Machinery Casings on Superstructure Decks ...	✓
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	No openings ✓
Deckhouses on Flush Deck Ships ...	✓



# PARTICULARS OF PROTECTION TO OPENINGS, ETC.

The following diagrams should be used to indicate the positions of cargo and coaling hatchways, gangway, cargo and coaling ports, ventilators, companionways, etc., which would affect the seaworthiness of the ship:—

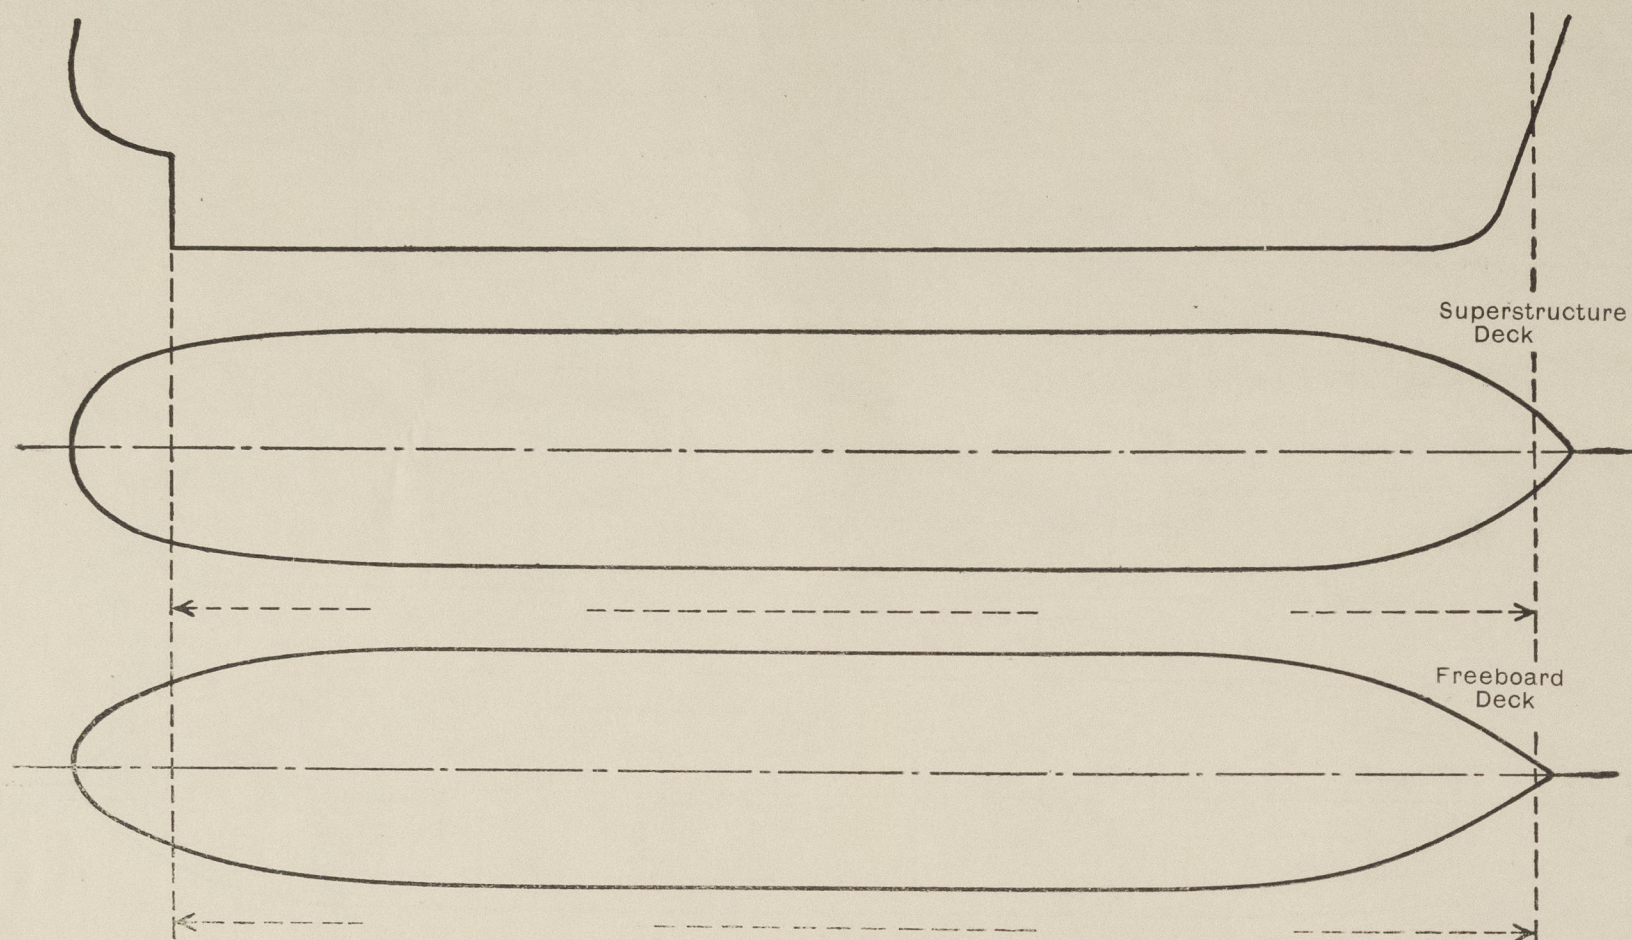

Particulars of fillet, funnel and ventilator cowings, engine room skylight and other openings in machinery casing tops and their means of closing:—

No fiddley.  
Funnel and ventilatorcowings in efficient condition.  
E.R. skylight of steel with steel hinged flaps.

Particulars of Flush Bunker Scuttles:—

None fitted.

Particulars of Companionways:—

Forecastle: Steel access hatch 700x700, coaming 610x10; steel, hinged, w.t. cover secured by togglebolts.  
Deckhouses on Bridge and Poop: Strong teak doors, hinged, operated both sides, sills 460 mm above wood deck.

Particulars of Ventilators in exposed positions on freeboard and superstructure decks:—

Forecastle: 1 Ventilators, 320 x 8 1/2, height exceeding 920, efficiently supported.  
Forewell: 2 " 340 x 9 " " " " " "  
Bridge: 4 " 340 x 9 " " " " " "  
Poop: 2 " 340 x 9 " " " " " "

Wood plugs and canvas covers supplied.

Particulars of Air Pipes in exposed positions on freeboard, raised quarter, or superstructure decks:—

Forecastle: 1 Airpipes, height 480.  
Forewell: 6 " " 920.  
Bridge: 8 " " 760.  
Poop: 10 " " 760.

Airpipes on fueloil tanks fitted with patent gas caps, remainder with wood plugs.

INTAN.

Particulars of Gangway Cargo and Coaling Ports:—

None fitted.

Particulars of Scuppers and Sanitary Discharge Pipes:—

Tonnagewell: P+S a bronze 5" bronze overboard scupper valve, operated from bridge, indicators open/shut fitted.  
Freeboard deck: P+S a discharge pipe led to motor room bilges with self closing cock at lower end.  
Sanit. disch. Poop spaces: above raised lower deck; bronze N.R. valves at ship's side.  
" Bridge: A.S.D.N.R. valves of bronze at ship's sides, operated from bridge, indicators open/shut fitted.  
" Fore'sle: above fbd deck; bronze N.R. valves at ship's side.

Particulars of Side Scuttles:— In Forecastle, Bridge and Poop.

All of substantial construction and fitted with strong hinged deadlights, permanently attached.

Vertical distance of Sill of lowest Side Scuttle above top of keel All above freeboard deck.

Particulars of Guard Rails:—

Forecastle: Open rail, height 960, 3 rods, stanchions 1260 apart.  
Forewell, Bridge, Poop: Steel bulwark, strongly constructed and efficiently supported.

Particulars of Gangways, Lifelines, etc.:—

Lifelines can be rigged over hatches.

## Particulars of Freeing Arrangements.

	Length of Bulwark	Height of Bulwark	Size of Freeing Ports	Number each side	Area each side	Rule area each side
After Well Poop	12015	1000	1350 x 230	3	.932	.498
BRIDGE	24200	1000	2400 x 170	4	1.686	1.469
Forward Well (R.Q.D.)	9900	1000	2500 x 200	2	1.000	.906

State position of each freeing port see sketch  
P and A position and Height above deck edge  
Poop: 100  
Bridge: 100  
Forward Well: 420

State whether the freeing ports are fitted with shutters, bars, or rails, and give particulars of such:— None fitted.


Additional area where sheer is less than standard.



# PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS.					
Description of Hatchway ... ..	1 R.Q. Deck	2 Fld. Deck	3 Bridge	Tonnage Hatchway Bridge	Access Hatch Cable Locker R.Q. Deck
Dimensions of Hatchway ... ..	5,50 x 2,50 m	4,10 x 4,40 m	3,70 x 4,40 m	1,25 x 3,70 m	0,54 x 0,80 m
COAMINGS { Height above Deck ... Thicknes { Sides } ... Stiffeners ... Ends } Brackets, Stays ...	760 ✓ 10 1/2 ✓ 230 · 10 1/2 ✓ 3 ✓	230 ✓ 10 1/2 ✓ - ✓ - ✓	710 above wood deck ✓ 10 1/2 ✓ - 230 · 10 ✓ 1 ✓	310 above wood deck ✓ 10 1/2 ✓ - ✓ - ✓	410 ✓ 7 ✓ L 65 · 65 · 7 ✓ - ✓
HATCH BEAMS { Number ... Spacing ... Scantling and Sketch ... Bearing Surface ...	3 ✓ Equal ✓ 150 · 10 ✓ 200 · 8 1/2 ✓ 150 · 10 ✓ 90 ✓	2 ✓ Equal ✓ 160 · 12 ✓ 320 · 9 ✓ 160 · 12 ✓ 90 ✓	2 ✓ Equal ✓ 150 · 12 ✓ 180 · 9 ✓ 150 · 12 ✓ 90 ✓		
FORE AND AFTERS { Number ... Spacing ... Unsupported Lengths ... Scantling* and Sketch ... Bearing Surface ...					
HATCH COVERS { Material ... Thickness ... How fitted ... Bearing Surface ...	Teak ✓ 2 1/2" ✓ FrA ✓ 70 ✓	Teak ✓ 2 1/2" ✓ FrA ✓ 75 ✓	Teak ✓ 2 1/2" ✓ FrA ✓ 70 ✓	Teak ✓ 2 1/2" ✓ FrA ✓ 65 ✓	Teak ✓ 2 1/2" ✓ FrA ✓ 63 ✓
Spacing of Cleats ... ..	560/150 ✓	610/150 ✓	560/150 ✓	- ✓	450/150 ✓
Number of Tarpaulins ... ..	2 ✓	1 ✓	2 ✓	2 ✓	1 ✓
<p>*Are wood <del>fore and after</del> covers steel shod at all bearing surfaces? yes ✓</p> <p>Are battens and wedges efficient and in good condition? yes ✓</p> <p>Are tarpaulins in good condition and in accordance with rule requirements? yes ✓</p> <p>Are lashings provided in accordance with rule requirements? yes ✓</p>					

Particulars of any special features:—

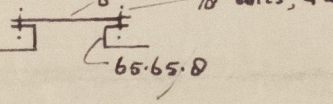Manhole in Forepeak tank deck (R.Q.D.)  500 x 400 mm



© 2021

Lloyd's Register  
Foundation