

17 OCT 1924

Index No. **31461**  
(For London Office only.)

# Lloyd's Register of Shipping.

## SURVEYS FOR FREEBOARD.—STEAM SHIPS.

VIRREX RAY

No. 175-3

PARTICULARS RELATING TO ALL STEAM SHIPS EITHER FLUSH DECKED, OR WITH TOP GALLANT FORECASTLES, SHORT POOPS AND BRIDGE HOUSES DISCONNECTED, OR WITH TOP GALLANT FORECASTLES HAVING LONG POOPS, OR RAISED QUARTER DECKS CONNECTED WITH BRIDGE HOUSES, OR OTHERWISE.

Port of Survey **HAMBURG**Date of Survey **WHILE BUILDING**Name of Surveyor **A. Christopher**

Particulars of Classification.

Ship's Name  
**"VENDIA"**Port of Registry and Nationality  
**COPENHAGEN  
DANISH.**

Official Number.

Gross Tonnage.

Date of Build.

**100A1 CONTEMPLATED.**  
(Revised Rules)

Number in Register Book

| Registered dimensions from Ship's Register. | LENGTH <sup>m</sup> | BREADTH <sup>m</sup> | DEPTH <sup>m</sup> | UNDER DECK TONNAGE.           |
|---------------------------------------------|---------------------|----------------------|--------------------|-------------------------------|
|                                             | 68.89               | 11.02                | 3.23               | 685.52                        |
|                                             | 226.02              | 36.16                | 10.59              |                               |
| Length on LOADLINE.                         | 226.0               | Frame Depth 5.8      | Ceiling fitted     | Peak Tanks                    |
|                                             |                     | Rule "H"             | Sheer + 50         | Add for extra depth Tank Tank |
|                                             |                     | 1 1/2 x 2 = .19      | 11.19              | for + 17 Tank                 |
|                                             |                     | 2 panning fitted     | Tank level         | af + 3.5                      |
| CORRECTED DIMENSIONS.                       | 226                 | 35.97                | 11.69              | 706.02                        |

Co-efficient of fineness..... **75.74**  
Any modification necessary } **C.O.B**  
[Para. 4 (a) to (e)]\* }  
Co-efficient as corrected ..... **73.72**

Sheer { Stem..... **40.08** } **99.02 ÷ 2 = 49.51** Mean  
at { Sternpost **28.94** } **36.18.22**  
Sheer at 1/2 of the length from { Stem **42.13** } **55.91 ÷ 2 = 27.95** Mean  
{ Sternpost **13.78** } **50.16 ÷ .55 = 50.82**  
Gradual mean Sheer ..... **all over**  
Standard mean Sheer [Table, Para. 18] ..... **32.6** Correction  
Difference..... **17.56 ÷ 4 = 4.39**  
§ If limited as Para. 18 (f) ..... **- 4 1/2**

Rise in Sheer { At front of bridge house.....  
from amidships { At after end of forecastle .....

¶ Fall in Sheer } **NIL ÷ 2 =**  
Para. 18 (d) }  
Length uncovered ..... Correction ✓

## ALLOWANCE FOR DECK ERECTIONS:—

Freeboard, Table C..... **0-5"**  
Correction for Length, if required (Para. 12, 13, and 14) .....  
Freeboard by Table A, corrected for sheer, and for length, if required (Para. 12, 13, and 14) " } **1-8 1/2"**  
Difference ..... **1-3 1/2"**  
Percentage as below..... **85% 86.5%**  
**13.51**  
**13.17 13.4"**

Correction for R. Q. Dk. if engine and boiler openings not covered by bridge house (Para. 11) } **- 1-1 1/4"**  
Allowance for Deck Erections .....

|                                                                       | Length.       | Length allowed. | Height.      |
|-----------------------------------------------------------------------|---------------|-----------------|--------------|
| Forecastle.....                                                       | <b>29'-2"</b> | <b>29.16</b>    | <b>6'-6"</b> |
| Trunk House (75x22) <b>427.25x20.5</b> } <b>4.25</b> <b>18.08</b>     |               |                 |              |
| Bridge House (36x22) <b>427.25x20.5</b> } <b>4.25</b> <b>18.08</b>    |               |                 |              |
| † Raised Qr. Dk.....                                                  | <b>93'-8"</b> | <b>93.66</b>    | <b>4'-0"</b> |
| Poop.....                                                             | <b>68'-5"</b> | <b>68.42</b>    | <b>7'-0"</b> |
| Total .....                                                           |               | <b>207.32</b>   |              |
| Length of Ship.....                                                   |               | <b>226.0</b>    | <b>.915</b>  |
| Corresponding percentage (Para. 11, 12, 13, or 14) } <b>85% 86.5%</b> |               |                 |              |

FREEBOARD recommended amidships from centre of Disc to top of Statutory Deck Line, Wood (Steel) Deck:—

Fresh Water Line above centre of Disc ...  
Indian Summer Line " " " ...  
Winter Line below " " " ...  
Winter North Atlantic Line " " " ...

Moulded Depth as measured..... **13'-6"**

Addition for Keel below base line for draught record..... **1.36** inches.

## CORRECTION FOR LENGTH.

Length of Ship on Loadline..... **226.0**  
Length in Table ..... **162.0**  
Difference ..... **64.0**  
Correction for 10ft., Table A. .... **.9** Table C.  
× Difference divided by 10 ..... **5.76** (if required.)  
If 1/10ths length covered divide by 2 **+ 3 1/2**

## CORRECTION FOR IRON DECK.

Proportion covered, if less than 1/10ths length covered .....  
Thickness of usual wood deck, less stringer ..... **3"**  
**PN = 14000 abt.**

## CORRECTION FOR ROUND OF BEAM.

Breadth at Gunwale amidships..... **36'-0"**  
Round of Beam ..... **8 5/8**  
Normal round..... **9**  
Difference ..... **3/8 ÷ 2 = 3/16**  
Proportion of Deck uncovered (Para. 19) ..... ✓

Freeboard, Table A ..... **2-10** **2-11**  
Correction for Sheer ..... **4.39** **- 4 1/2**  
Correction for Length ..... **1-8.61** **1-8 1/2**  
Allowance for Deck Erections ..... **2.58** **+ 3**  
Correction for Round of Beam..... **1-11.49** **1-11 1/2**  
Correction for fall in Sheer (if any)..... **1-1.51** **1-1 1/2**  
Correction for Iron Deck (if required) ..... **9.98** **0-10 1/4**  
Additions for non-compliance with provisions of Para. 11 (d) and (e) † .....  
Other Corrections (if any) ..... **Neight. R. 05 4-0**

Winter Freeboard ..... **4-7 1/4**  
Summer Freeboard ..... **4-5 1/4**  
Indian Summer Freeboard ..... **4-3 1/4**  
N. A. Winter Freeboard ..... **4-9 1/4**

Correction necessary because clearside amidships, measured in accordance with the Statute is not taken at the intersection of the wood or steel deck with side. } **+ 1 1/2**

Winter Freeboard from deck line ..... **4-8 3/4**  
Summer " " " ..... **4-6 3/4**  
Indian Summer " " " ..... **4-4 3/4**  
N. A. Winter " " " ..... **4-10 3/4**  
**RAISED QUARTER DECK** **4-6 1/2**

13 OCT 1924

† If the frames, skin planking, or ceiling are of unusual thickness the breadth of vessel to inside of ceiling should be reported if possible.  
† In vessels obtaining an allowance for deck erections under Para. 11 where the sheer drops abaft amidships the height of the R.Q.D. is to be taken from the level of the top of the amidship beam.  
§ In flush-decked vessels the total standard mean sheer means the sheer measured at the stem and sternpost. In vessels having poops and forecastles, it means the sheer measured at points distant one-eighth of the vessel's length from stem and sternpost.

State dimensions of freeing port area on back of this form.  
The Surveyor should state whether the fall in sheer as reported is measured relative to the statutorily line of keel or to the waterline. If measured relative to water line the vessel's draft at time of survey, and also the usual load draft forward and aft, should be reported.

RECEIVED 19 SEP 1932  
RECEIVED 31

WHL5-0088



Do all the Frames extend to the top height in the Poop? YES. Raised Quarter Deck? YES. Bridge House? YES. Forecastle? YES.

To what height do the Reverse Frames extend? BUILD ANGLE FRAMING.

Has the Poop or Raised Quarter Deck an efficient Iron Bulkhead at the fore end? YES.

Give particulars of the means for closing the openings in Bulkhead NO OPENINGS.

Is the Poop or Raised Quarter Deck connected with the Bridge House? YES. Has the Bridge House an efficient Bulkhead at the fore end? YES.

Give particulars of the means for closing the openings in Bulkhead YES.

What is the thickness of the Bridge Front plating? YES. and Coaming plate? YES.

Give scantlings and spacing of the Stiffeners YES.

Are bracket plates fitted at each end of the Stiffeners? YES. Are hor'l. brackets fitted connecting Bridge Bulk'd. with Bulwarks? YES.

Has the Bridge House an efficient Iron Bulkhead at the after end? YES.

How are the openings closed? YES. Has the Forecastle an efficient Iron or Wood Bulk'd. at after end? YES.

Is the Forecastle at least as high as the main or top-gallant rail? YES.

Are the Engine and Boiler openings covered by a Bridge, Poop, Raised Quarter Deck, or enclosed by a Strong Iron or Steel Deckhouse? COVERED BY A POOP.

If the openings are not so protected are the exposed parts of the Casings efficiently constructed? STEEL DECK HOUSE.

Give thickness of plating; scantlings and spacing of Stiffeners YES.

What is the height of the exposed Casings? 7'-10" Are suitable means provided for closing all openings in them in bad weather? YES.

Are the Weather Deck Hatchways efficiently constructed and at least equal to the requirements of Section 28 of the Rules for 1904-5? Give particulars below:—

| Position and Size.                        | No 1 = 23'-11" x 22'-19'-8"        | No 2 = 27'-7" x 22'-0" | No 3 = 33'-1" x 22'-0" |             |             |             |             |
|-------------------------------------------|------------------------------------|------------------------|------------------------|-------------|-------------|-------------|-------------|
| Item.                                     | Ship. Rule.                        | Ship. Rule.            | Ship. Rule.            | Ship. Rule. | Ship. Rule. | Ship. Rule. | Ship. Rule. |
| COAMING. Height above top of DECK         | 4'-9 1/2" (19 1/2" above trunk) AS | 3'-5 1/2" AS           | 3'-9" AS               | ✓           | ✓           | ✓           | ✓           |
| Thickness { Sides.....                    | 44 APPROVED                        | 44 APPROVED            | 44 APPROVED            | ✓           | ✓           | ✓           | ✓           |
| Ends.....                                 | ✓                                  | 44                     | ✓                      | ✓           | ✓           | ✓           | ✓           |
| SHIFTING BEAMS OR WEB PLATES. Number..... | 5                                  | 5                      | 7                      | ✓           | ✓           | ✓           | ✓           |
| Section and Scantlings.....               | 4 3/4" x 3 1/2" x 52               | AS No 1. Do            | AS No 1. Do            | ✓           | ✓           | ✓           | ✓           |
| Material.....                             | 16" x 36" x 52                     | 4 3/4" x 3 1/2" x 52   |                        | ✓           | ✓           | ✓           | ✓           |
| * FORE AND AFTERS. Number.....            | ✓                                  | ✓                      | ✓                      | ✓           | ✓           | ✓           | ✓           |
| Section and Scantlings.....               | ✓                                  | ✓                      | ✓                      | ✓           | ✓           | ✓           | ✓           |
| Material.....                             | ✓                                  | ✓                      | ✓                      | ✓           | ✓           | ✓           | ✓           |
| HATCHES Thickness.....                    | 3" PINE.                           | 3" PINE.               | 3" PINE.               | ✓           | ✓           | ✓           | ✓           |
| Remarks.....                              |                                    |                        |                        |             |             |             |             |

\* The depth of Fore and Afters should be stated from the underside of the hatches in all cases.

(If the sill of the lowest side scuttle will be less than 6 inches above the Indian Summer Load Line if assigned under the tables, state vertical distance from top of deck at side amidships to lower edge of lowest side scuttle.)

The following information is to be given in all Cases of vessels dealt with under Paras. 11, 12 (under 15 feet Moulded depth) and under Shelter Deck Rules.

What is the thickness of the Bridge Sheerstrake? YES. Strake between Main and Bridge Sheerstrakes? YES.

Delete the words are not, berthed in the bridge house.

that do not apply { The Crew are, are not, berthed in the bridge house.

                            { The arrangements to enable them to get backwards and forwards from their quarters are, are not satisfactory.

Length of Bulwarks in well 34'-9" AND QU. DK. = 93'-8 1/2" x 3'-6"


Area of Freeing Ports required by Para. 11 (e) each side of vessel = 9.97 { 13.9 Sq. ft. IN WELL

Ft. Tenths. Ft. Tenths. No. Classm. only. { 16.4 B. QU. DK.

IN WELL 3'-0" x 1.75 x 3 = 15.75 { 15.75 Sq. ft. WELL

QUARTER DK 3'-0" x 1.50 x 4 = 5.78 { 18.00 QU. DK.

Total deficiency or excess = 5.78 Sq. ft.

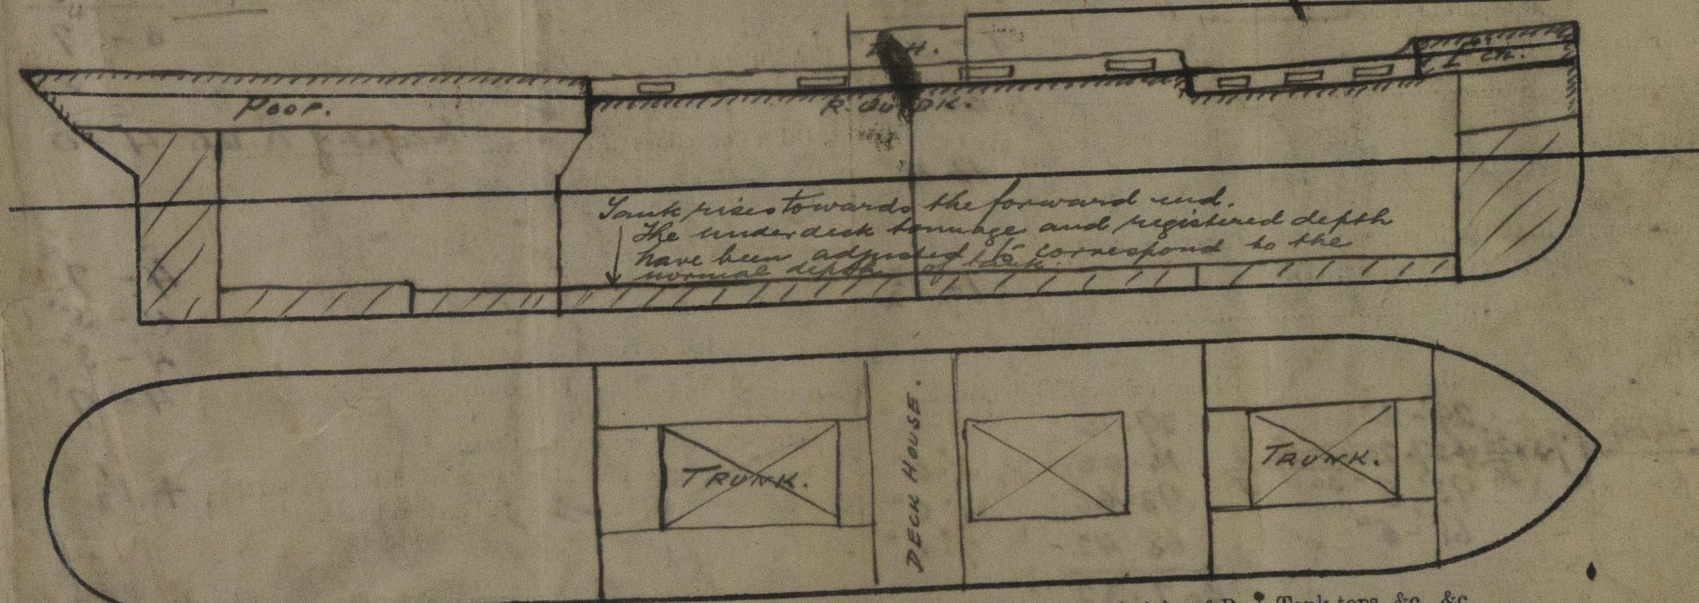

Show hereon line of Floors or Tank Top with position of any Breaks in same; also height of Peak Tank tops, &c., &c.

State any special features in the construction of the Vessel

Builder's name and yard number HOWALDTSWERKE, KIEL No 692.

Names of sister vessels ?

Owners A/S. P/S. DE FORENEDE KULIMPORTØRER

Address COPENHAGEN K. HOLMENS KANAL 5.

Received by me Will be charged with Just Sub