

REPORT ON ELECTRIC LIGHTING INSTALLATION. No. 2248

Port of Kobe. Date of First Survey April 12th Date of Last Survey April 30th No. of Visits 4.
 No. in Reg. Book on the Iron or Steel P. S. Jotai Maru Port belonging to Naba (Inmoshima)
 Built at Inmoshima By whom Osaka Iron Works When built 1918
 Owners Kobe Ywa Kisen Kabushiki Kaisha Owners' Address _____
 Yard No. 933. Electric Light Installation fitted by Builders When fitted 1918.

DESCRIPTION OF DYNAMO, ENGINE, ETC.

Direct compound dynamo.

Capacity of Dynamo 10K.W. 110 Amperes at 110 Volts, whether continuous or alternating current D.C.

Where is Dynamo fixed at starboard side on platform of E.R. Whether single or double wire system is used double wire system

Position of Main Switch Board on the bulkhead of starboard coal bunkers having switches to groups for main circuit breakers of lights, &c., as below

Positions of auxiliary switch boards and numbers of switches on each _____

one for engine room, one for crew's quarters, two for officers' rooms and one for signal light

If fuses are fitted on main switch board to the cables of main circuit fitted and on each auxiliary switch board to the cables of auxiliary circuits fitted and at each position where a cable is branched or reduced in size branched and reduced to each lamp circuit branched

If vessel is wired on the double wire system are fuses fitted to both flow and return wires or cables of all circuits including lamp circuits fitted

Are the fuses of non-oxidizable metal yes and constructed to fuse at an excess of 30% per cent over the normal current

Are all fuses fitted in easily accessible positions yes Are the fuses of standard dimensions yes If wire fuses are used are permanent instructions fitted on or near each switch board giving particulars of proper size of fuse for each circuit yes

Are all switches and fuses constructed of incombustible materials and fitted on incombustible bases yes

Total number of lights provided for 20 and 2 arc lamps arranged in the following groups:—

A	Engine room	24 lights each of	16	candle power requiring a total current of	13	Amperes
B	Officers room	30 lights each of	16	candle power requiring a total current of	17.8	Amperes
C	Crew's quarters	12 lights each of	16	candle power requiring a total current of	6.4	Amperes
D		lights each of		candle power requiring a total current of		Amperes
E	Starn light	1 lights each of	32	candle power requiring a total current of	1.06	Amperes
	Must head light with	2 lamps each of	32	candle power requiring a total current of	5.12	Amperes
	Side light with	2 lamps each of	32	candle power requiring a total current of	5.12	Amperes
	Cargo lights of	10-6 clustered	16	candle power, whether incandescent or arc lights	both are used	

If arc lights, what protection is provided against fire, sparks, &c. 2 arc lamps used + protection is made complete they requiring a total current of 21.2 + 8 amperes.

Where are the switches controlling the masthead and side lights placed placed at bridge deck

DESCRIPTION OF CABLES.

Main cable carrying 100 Amperes, comprised of lead wires, each number + gauge # 10/18 S.W.G. diameter, 0.14 square inches total sectional area
 Branch cables carrying 10 Amperes, comprised of ditto wires, each # 7/16 S.W.G. diameter, 0.024 square inches total sectional area
 Branch cables carrying 17.8 Amperes, comprised of or covered ditto wires, each # 7/16 S.W.G. diameter, 0.024 square inches total sectional area
 Leads to lamps carrying 13 Amperes, comprised of covered wires, each # 7/18 S.W.G. diameter, 0.013 square inches total sectional area
 Cargo light cables carrying 21.2 Amperes, comprised of ditto wires, each # 7/18 S.W.G. diameter, 0.013 square inches total sectional area

DESCRIPTION OF INSULATION, PROTECTION, ETC.


Officers' rooms and crew's quarters lead cover wire through wooden covers engine and boiler space and cargo hatches armoured wire or galvanised wire pipe

Joints in cables, how made, insulated, and protected porcelain boxes or cast iron boxes are used

Are all the joints of cables thoroughly soldered, and the flux used not containing acids or other corrosive substances yes Are all joints in accessible positions, none being made in bunkers, cargo spaces, or spaces which may at any time be used for carrying cargo, stores, or baggage yes

Are there any joints in or branches from the cable leading from dynamo to main switch board no

How are the cables led through the ship, and how protected no

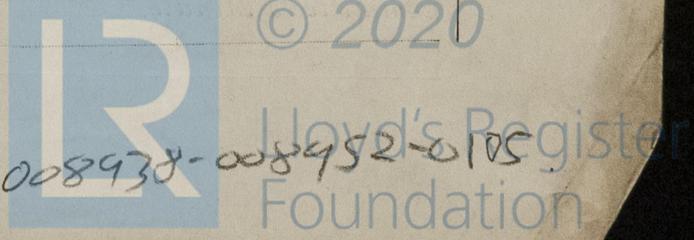

DESCRIPTION OF INSULATION, PROTECTION, ETC.—continued.

Are they in places always accessible *Yes*

What special protection has been provided for the cables in open alleyways or where exposed to weather or moisture *by galvanised wire pipe*

What special protection has been provided for the cables near galleys or oil lamps or other sources of heat *by the use of armoured wire*

What special protection has been provided for the cables near boiler casings *ditto*

What special protection has been provided for the cables in engine room *by the use of armoured wire or galvanised wire pipe or cover*

How are cables carried through beams *lead sheet in covered* through bulkheads, &c. *by gland nut with india-rubber packing complete*

How are cables carried through decks *through a galvanised wire pipe with flange fixed to deck*

Are any cables run through coal bunkers *Yes* or cargo spaces *Yes* or spaces which may be used for carrying cargo, stores, or baggage *Yes*

If so, how are they protected *by the use of armoured wire or wire run through galvanised wire pipes*

Are any lamps fitted in coal bunkers or spaces which may at times be used for cargo, coals, or baggage *Nothing*

If so, how are the lamp fittings and cable terminals specially protected

Where are the main switches and fuses for these lights fitted

If in the spaces, how are they specially protected

Are any switches or fuses fitted in bunkers

Cargo light cables, whether portable or permanently fixed *portable* How fixed

In vessels fitted on the single wire system, how is the dynamo terminal fixed to the hull of vessel

How are the returns from the lamps connected to the hull

Are all the joints with the hull in accessible positions

Is the installation supplied with a voltmeter *Yes*, and with an amperemeter *Yes*, fixed *at a suitable board*

VESSELS BUILT FOR CARRYING PETROLEUM.

In vessels built for carrying petroleum, are all switches and fuses fitted in positions not liable to the accumulation of petroleum vapour or gas

Are any switches, fuses, or joints of cables fitted in the pump room or companion

How are the lamps specially protected in places liable to the accumulation of vapour or gas

The copper used is guaranteed to have a conductivity of not less than that of the Engineering Standards Committee's standard, and the wires are protected by tinning from the sulphur compounds present in the insulating material.

Insulation of cables is guaranteed to have a resistance of not less than _____ megohms per statute mile at 60° Fahrenheit after 24 hours' immersion in water, the test being made after one minute's electrification at not less than 500 volts and while the cable is still immersed.

The foregoing statements are a correct description of the Electric Light installation fitted by us on this vessel and we declare that it is at this date in good order and safe working condition.

E. Toyoshima Electrical Engineers

Date _____

COMPASSES.

Distance between dynamo or electric motors and standard compass *above 90°*

Distance between dynamo or electric motors and steering compass _____

The nearest cables to the compasses are as follows:—

A cable carrying	<i>1.3</i>	Amperes	<i>7.0</i>	feet from standard compass	_____	feet from steering compass	_____
A cable carrying	_____	Amperes	_____	feet from standard compass	_____	feet from steering compass	_____
A cable carrying	_____	Amperes	_____	feet from standard compass	_____	feet from steering compass	_____

Have the compasses been adjusted with and without the electric installation at work at full power _____

The maximum deviation due to electric currents, etc., was found to be _____ degrees on _____ course in the case of the standard compass and _____ degrees on _____ course in the case of the steering compass.

Builder's Signature. Date _____

GENERAL REMARKS.

The installation has been fitted according to the requirements of the Rules and worked satisfactorily on trial

It is submitted that this vessel is eligible for THE RECORD. ELEC. LIGHT

R. B. Batcher

Surveyor to Lloyd's Register of Shipping.

Committee's Minute _____

THE SURVEYORS ARE REQUESTED NOT TO WRITE ACROSS THIS MARGIN.

