

DISCLOSED

SECTION 29199
Index No. 29199
No. 2899

Rpt. 11b.

WED. AUG. 14 1920

(For London Office only.)

Lloyd's Register of Shipping.

SURVEYS FOR FREEBOARD.—STEAM SHIPS.

PARTICULARS RELATING TO ALL STEAM SHIPS EITHER FLUSH DECKED, OR WITH TOP GALLANT FORECASTLES, SHORT POOPS AND BRIDGE HOUSES DISCONNECTED, OR WITH TOP GALLANT FORECASTLES HAVING LONG POOPS, OR RAISED QUARTER DECKS CONNECTED WITH BRIDGE HOUSES, OR OTHERWISE.

Port of Survey Jama
Date of Survey May 13th 1920
Name of Surveyor H.P. House

Mitsui Bussan Kaisha No. 53

Ship's Name. <u>Kiso Maru</u>	Port of Registry and Nationality. <u>Itosaki</u>	Official Number. <u>27113</u>	Gross Tonnage. <u>4065.51</u>	Date of Build. <u>1920</u>	Particulars of Classification. <u>* 100 A.1. Contemplated.</u>
----------------------------------	---	----------------------------------	----------------------------------	-------------------------------	---

Registered dimensions from Ship's Register.	LENGTH. <u>345.00</u>	BREADTH. <u>50.20</u>	DEPTH. <u>26.65</u>	UNDER DECK TONNAGE. <u>3503.76</u>
Length on LOADLINE.		Frame Depth Rule <u>10</u> <u>6</u> <u>4 5" drop in</u> <u>2 x 4 = 66</u>	Ceiling <u>+20</u> Sheer <u>+42</u> <u>44</u> <u>44</u> <u>20</u>	Peak Tanks } <u>Incl.</u>
	<u>345.00</u>	<u>49.94</u>	<u>27.47</u>	<u>3503.76</u>

Moulded Depth as measured... 29.08
Addition for Keel below base line for draught record... 2 1/2 inches.

NOTE.— If the depth is measured when vessel is afloat, the details of measurement should be reported.

CORRECTION FOR LENGTH.

Length of Ship on Loadline.....	<u>345.0</u>
Length in Table	<u>349.0</u> <u>348.37</u>
Difference	<u>4.0</u> <u>3.37</u>
Correction for 10ft., Table A.	<u>1.5</u> Table C. <u>7</u>
× Difference divided by 10	<u>.50</u> <u>.6</u> (if required.) <u>28.23</u>
If 10ths length covered divide by 2 =	<u>7 1/4</u> <u>1/2</u> = <u>7 1/2</u>

CORRECTION FOR IRON DECK.

Proportion covered, if less than 1/10ths length covered	<u>9</u>
Thickness of usual wood deck, less stringer	<u>3/2</u> = <u>1 1/2</u>

CORRECTION FOR ROUND OF BEAM.

Breadth at Gunwale amidships.....	<u>48.0</u>
Round of Beam	<u>12 1/2</u>
Normal round.....	<u>12 1/2</u>
Difference	<u>0</u> ÷ 2 = <u>0</u>
Proportion of Deck uncovered (Para. 19)	<u>✓</u>

NOTE.— The round of beam should be reported on the full breadth of vessel at the gunwale.

Stem fineness..... .75
Correction necessary for 4 (a) to (e)]* .02
Stem fineness as corrected..... .73

Stem post..... 84
Stern post..... 42 1/2
Mean Sheer..... 60.0
Mean Sheer [Table, Para. 18]..... 44.50
Difference..... 15.50 ÷ 4 = 3.87
Corrected as Para. 18 (f)..... 16.1

Sheer at front of bridge house..... ✓
Sheer at after end of forecastle..... ✓
Sheer at 18 (d)..... ÷ 2 = ✓
Deck uncovered..... Correction

ALLOWANCE FOR DECK ERECTIONS:—

Table C.....	<u>3 - 11 10 3/4</u>
Correction for Length, if required (Para. 12, 13, and 14)	<u>1 1/2</u>
Correction by Table A. corrected for sheer, and for length, if required (Para. 12, 13, and 14)	<u>6 - 8 7/8</u> <u>7 3/4</u>
Correction as below.....	<u>2 - 9 3/8</u> <u>4</u>
Correction for R. Q. Dk. if engine and boiler openings not covered by bridge house (Para. 11)	<u>9</u>
Correction for Deck Erections	<u>8.98</u>

Length.	Length allowed.	Height.
<u>40.46</u>	<u>40.46</u>	<u>7.75</u>
<u>74.25</u>	<u>74.25</u>	<u>7.75</u>
<u>33.29</u>	<u>33.29</u>	<u>7.75</u>
Stat.	<u>148.00</u>	<u>429</u>
Ship	<u>345.00</u>	<u>426</u>

Corresponding percentage (Para. 11, 12, 13, or 14) 26.4 27.03

FREEBOARD recommended amidships from centre of Disc to top of Statutory Deck Line, Wood (Iron) Deck:

Fresh Water Line above centre of Disc	<u>6 8 20</u>
Indian Summer Line " " "	
Winter Line below " "	
Winter North Atlantic Line " " "	

Freeboard, Table A	<u>7 - 10 1/4</u>
Correction for Sheer	<u>3 1/4</u>
Correction for Length	<u>6 - 9 7/8</u> <u>8 1/4</u>
Allowance for Deck Erections	<u>9</u>
Correction for Round of Beam.....	<u>5 - 11 5/8</u> <u>10 3/4</u>
Correction for fall in Sheer (if any).....	<u>✓</u>
Correction for Iron Deck (if required)	<u>1 1/2</u>
Additions for non-compliance with provisions of Para. 11 (d) and (e) †	<u>5 - 19 7/8</u> <u>1/4</u>
Other Corrections (if any)	<u>✓</u>

Winter Freeboard	<u>5 - 9 3/4</u> <u>1/4</u>
Summer Freeboard	<u>5 - 4 1/2</u>
Indian Summer Freeboard	<u>4 - 11 1/4</u> <u>10 3/4</u>
N. A. Winter Freeboard	<u>3</u>
Correction necessary because clearside amidships, measured in accordance with the Statute is not taken at the intersection of the wood or iron deck with side.	<u>14</u>

Winter Freeboard from deck line	<u>5 - 11 1/2</u>
Summer " " " "	<u>5 - 6 1/2</u> <u>5 3/4</u>
Indian Summer " " " "	<u>5 - 10 1/2</u>
N. A. Winter " " " "	<u>5 - 6</u>
State dimensions of freeing port area on back of this form.	<u>5 1/2</u>

† In vessels obtaining an allowance for deck erections under Para. 11 where the sheer drops abaft amidships the height of the R.Q.D. is to be taken from the level of the top of the amidship beam.

† The Surveyor should state whether the fall in sheer as reported is measured relatively to the straight line of keel or to the water line. If measured relatively to water line the vessel's draft at time of survey, and also the usual load draft forward and aft, should be reported.



Do all the Frames extend to the top height in the Poop? *yes* Raised Quarter Deck? *yes* Bridge House? *yes* Forecastle? *yes*
 To what height do the Reverse Frames extend? *Upper + 2nd. Sk. all by. In Fore Peak to Side + 2nd. Sk. all by. all to U.S. in A.P.*
 Has the Poop or Raised Quarter Deck an efficient Iron Bulkhead at the fore end? *yes*
 Give particulars of the means for closing the openings in Bulkhead *Hinged W. J. door*
 Is the Poop or Raised Quarter Deck connected with the Bridge House? *no* Has the Bridge House an efficient Bulkhead at the fore end? *yes*
 Give particulars of the means for closing the openings in Bulkhead *Steel hinged W. J. doors*
 What is the thickness of the Bridge Front plating? *.40"* and Coaming plate? *.44"*
 Give scantlings and spacing of the Stiffeners *9 x 3 1/2 x .475 Spaced 31" apart*
 Are bracket plates fitted at each end of the Stiffeners? *yes* Are hor'l. brackets fitted connecting Bridge Bulk'd. with Bulwarks? *yes*
 Has the Bridge House an efficient Iron Bulkhead at the after end? *yes*
 How are the openings closed? *Steel hinged doors*
 Is the Forecastle at least as high as the main or top-gallant rail? *yes* Has the Forecastle an efficient Iron or Wood Bulk'd. at after end? *yes*
 Are the Engine and Boiler openings covered by a Bridge, Poop, Raised Quarter Deck, or enclosed by a Strong Iron or Steel Deckhouse? *yes*
 If the openings are not so protected are the exposed parts of the Casings efficiently constructed? *yes*
 Give thickness of plating; scantlings and spacing of Stiffeners *yes*
 What is the height of the exposed Casings? *yes* Are suitable means provided for closing all openings in them in bad weather? *yes*
 Are the Weather Deck Hatchways efficiently constructed and at least equal to the requirements of Section 28 of the Rules for 1904-5? Give particulars below: *yes*

Position and Size.	No. 1 27'-6" x 18'-0"		No. 2 33'-0" x 18'-0"		No. 3 30'-3" x 18'-0"		No. 4 27'-6" x 18'-0"		Ship.	Rule.
Item.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.
COAMING	Height above top of DECK	24"	24"	24"	24"	24"	24"	24"		
	Thickness	Sides	.44	.44	.44	.44	.44	.44		
		Ends	.44	.44	.44	.44	.44	.44		
SCANTLING WEB PLATES	Number	5	5	6	6	6	6	5	5	
	Section and Scantlings	4x3x.44		4x3x.44		4x3x.44		4x3x.44		
	Material	Steel		Steel		Steel		Steel		
* FORE AND AFTERS.	Number	None		None		None		None		
	Section and Scantlings	None		None		None		None		
	Material	None		None		None		None		
HATCHES Thickness	3"	3"	3"	3"	3"	3"	3"	3"		
Remarks	All hatches stiffened with 7" bulb angles									

* The depth of Fore and Afters should be stated from the underside of the hatches in all cases.
 (If the sill of the lowest side scuttle will be less than 6 inches above the Indian Summer Load Line if assigned under the tables, state vertical distance from top of deck at side amidships to lower edge of lowest side scuttle.)

The following information is to be given in all Cases of vessels dealt with under Paras. 11, 12 (under 15 feet Moulded depth) and under Shelter Deck Rules.

What is the thickness of the Bridge Sheerstrake? _____ Strake between Main and Bridge Sheerstrakes? _____
 Delete the words { The Crew are, are not, berthed in the bridge house.
 that do not apply { The arrangements to enable them to get backwards and forwards from their quarters are, are not satisfactory.
 Length of Bulwarks in well _____
 Area of Freeing Ports required by Para. 11 (e) each side of vessel = _____ Sq. ft.
 Ft. Tenths. Ft. Tenths. No. } Freeing Ports = _____ Sq. ft.
 (each side of vessel)
 Total deficiency or excess = _____ Sq. ft.

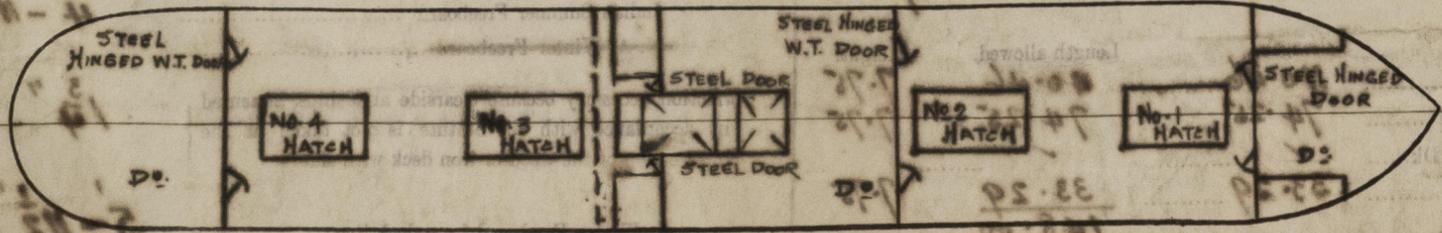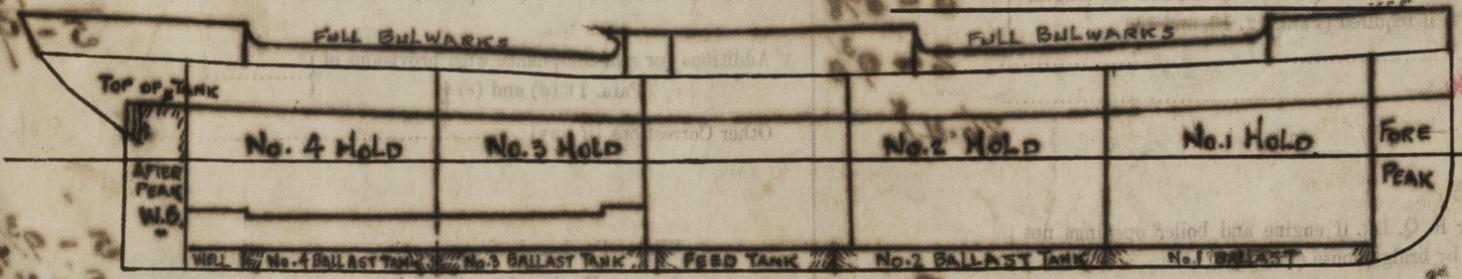

Show hereon line of Floors or Tank Top with position of any Breaks in same; also height of Peak Tank tops, &c., &c.

State any special features in the construction of the Vessel. *This vessel is a sister-ship of the 'S. S. Tomiura' Maru built by the Mitsubishi Dockyard Co. at Nagasaki.*

Owners _____
 Address _____
 Fee *Yen 100.00*

Received by me _____