

GOVT. COPY ISSUED

12-3-54

FB 267

Rpt. C.11.

OWNERS' C.11 ISSUED

12-3-54

Index No. _____
(For London Office only.)

117 JUL 1953


Lloyd's Register of Shipping.

SURVEYS FOR FREEBOARD.

(CONDITIONS OF ASSIGNMENT.)

Ship's Name "BEKAKA" Port of Survey London
 Official Number ✓ Surveyor's Signature [Signature]
 Nationality and Port of Registry Indonesian Djakarta Date of Survey 6-7-53

Disposition and dimensions of superstructures, trunks, deckhouses and machinery casings to be inserted in the diagrams and tabular statement:—

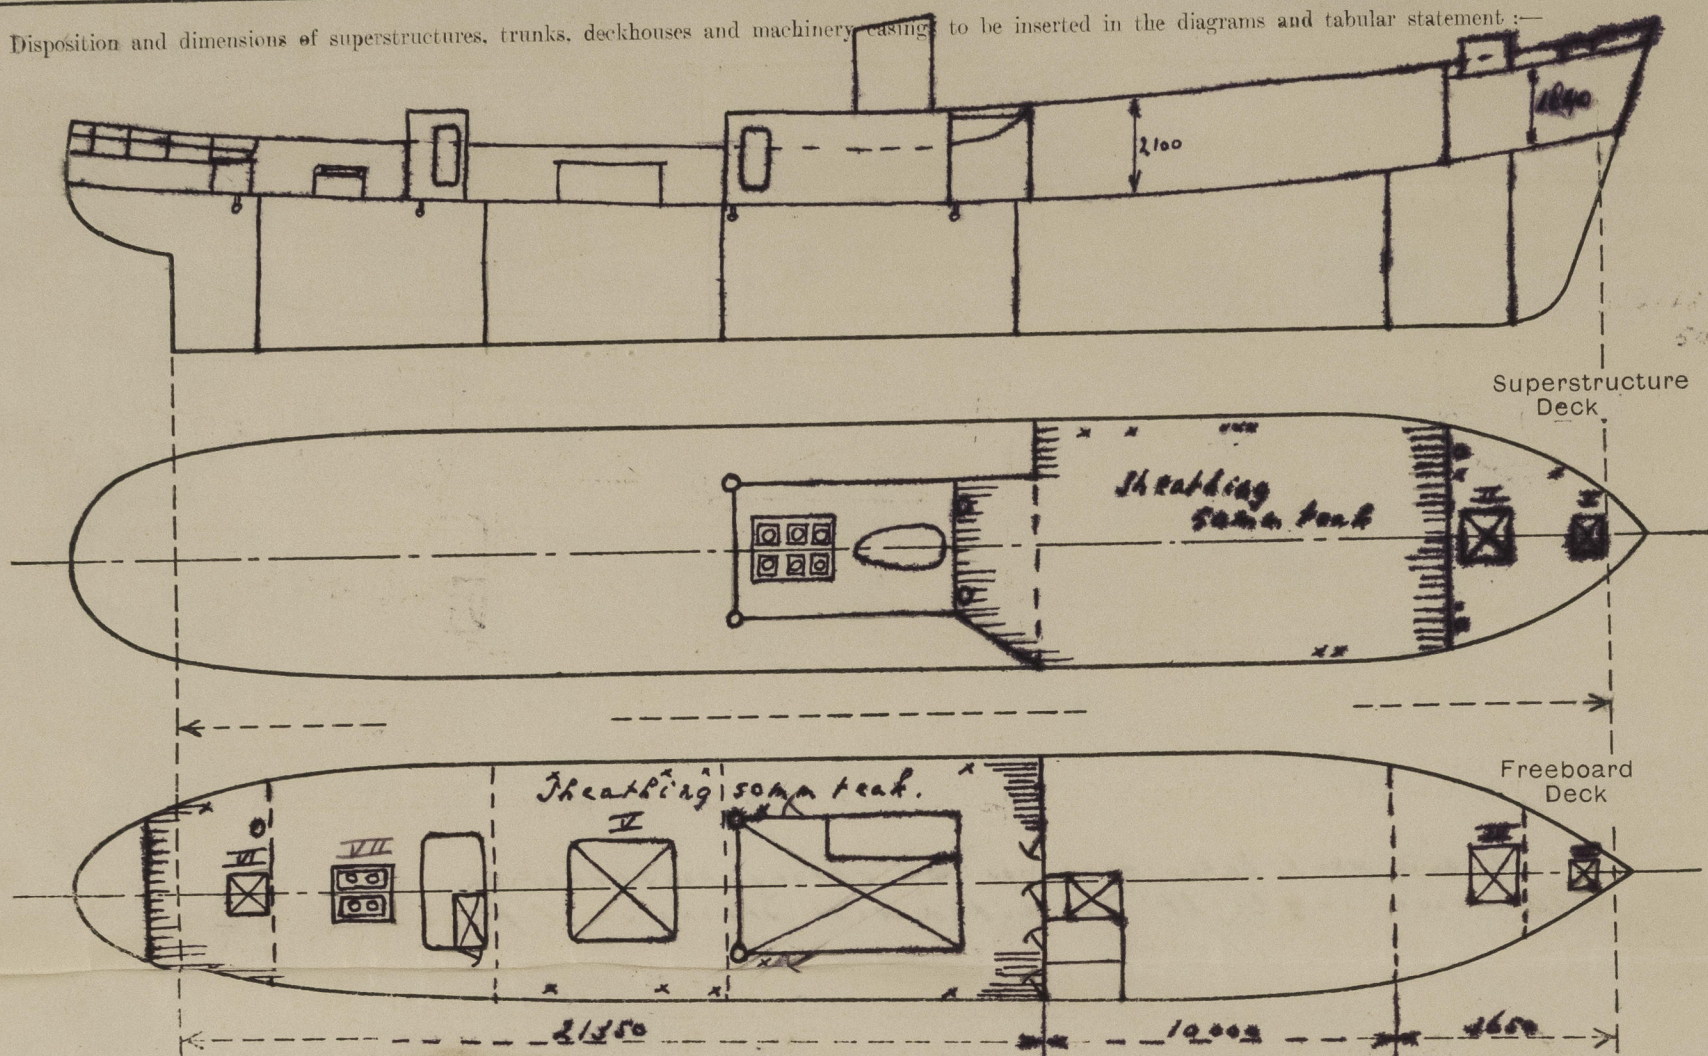


Particulars of Superstructures, Trunks, Casings, Deckhouses.

	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height of Casings
Poop Bulkhead ...	✓							
Raised Quarter Deck Bulkhead ...	✓							
Bridge, After Bulkhead ...	✓							
Bridge, Forward Bulkhead ...	✓							
Forecastle Bulkhead...	7 1/2	5 1/2	L 65 x 50 x 6	max 550	area	2 x 1200 x 600 2 x 1400 x 600	600 610	2100
Trunk, Aft ...	✓							
Trunk, Forward ...	✓							
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	7 1/2	5	L 65 x 50 x 6	max 510	brackets top	1400 x 600 (plg) 410	410	2200
Exposed Machinery Casings on Superstructure Decks ...	✓							
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	✓							
Deckhouses on Flush Deck Ships ...	✓							

Particulars of Closing Appliances (state if capable of being manipulated from both sides).

Poop Bulkhead ...	✓
Raised Quarter Deck Bulkhead ...	✓
Bridge, After Bulkhead ...	✓
Bridge, Forward Bulkhead ...	✓
Forecastle Bulkhead...	2 hinged wood doors manipulated from both sides / to be separated from deck space
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	2 hinged steel doors manipulated from both sides
Exposed Machinery Casings on Superstructure Decks ...	✓
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	✓
Deckhouses on Flush Deck Ships ...	✓

The following diagrams should be used to indicate the positions of cargo and coaling hatchways, gangway, cargo and coaling ports, ventilators, companionways, etc., which would affect the seaworthiness of the ship :—

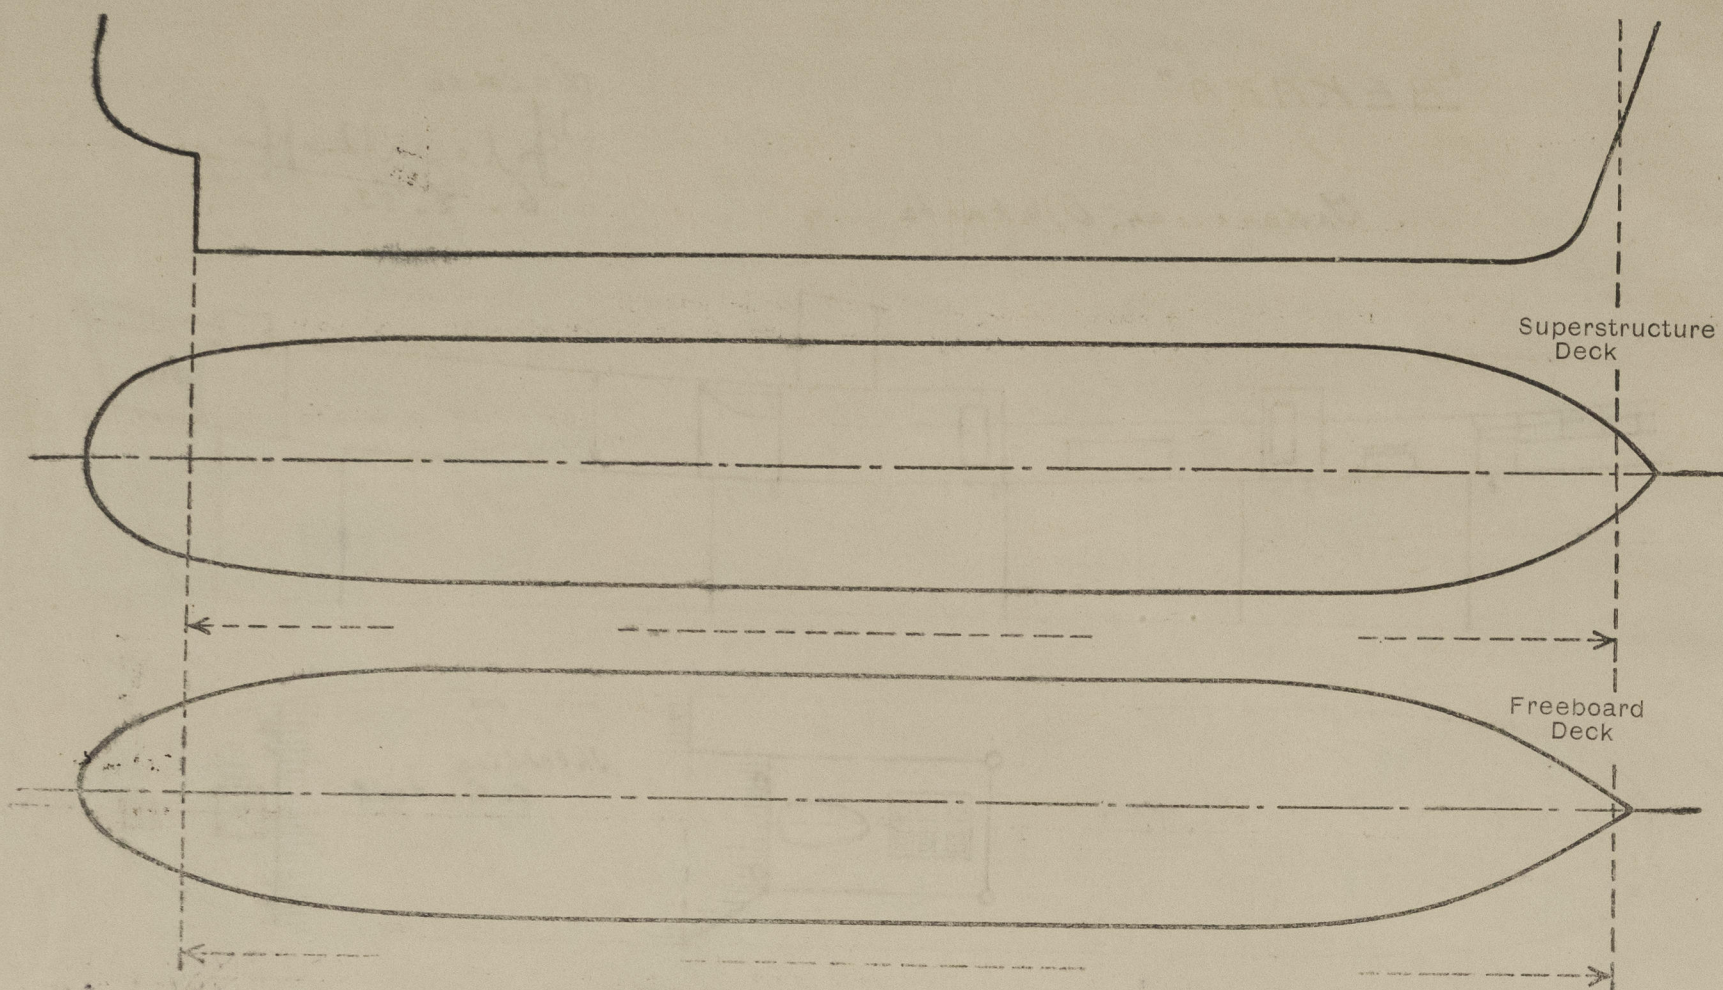

Particulars of fidley, funnel and ventilator coamings, engine room skylight and other openings in machinery casing tops and their means of closing :—

Funnel and ventilator casings of strong construction.
Laguna room skylight provided with strong steel flaps.

Particulars of Flush Bunker Scuttles :—

Doc.

Particulars of Companionways :—

A. Sub opening 1820 x 900, door opening 1450 x 600, with 610, steel hinged door on both sides.
B. " 1100 x 750 " " 1450 x 600, " 610, " " " " " "

Particulars of Ventilators in exposed positions on freeboard and superstructure decks:—

2 on fore deck for 60 paco height 915 thickness 85, leading to stove

204	1975	2000	10	Motor room
-----	------	------	----	------------

supported through engine casing.

2 sensor posts frame 27 7 250 height 4400. leading to hold.

supported through engine casing.

2 aft frame 6 on prob. deck. 7500, height 2700, thickness 8", upto 46" in, remainder

Stm. supported by sundack.

All trainings provided with wood plugs and canvas covers.

Particulars of Air Pipes in exposed positions on freeboard, raised quarter, or superstructure decks :—

All air pipes in exposed positions on foreboard deck 910 high. ✓

" " " On superstructure deck 460 high.

are provided with canvas covers and wood plugs on chains.

of oil compartments are provided with wire gauze
diaphragms & canvas covers.

Bekaka.

FB 267

17 JUL 1953

Particulars of Gangway Cargo and Coaling Ports :—

Note.

Particulars of Scuppers and Sanitary Discharge Pipes :—

Scuppers from freeboard deck led over board at load water line through strong steel pipes.
" " fore-castle " " to foreboard deck at end of fore-castle.
" " fore part of fore deck led through deck and shell above load water line.
No sanitary discharges from spaces below the freeboard deck.
All sanitary discharges from spaces above the freeboard deck are led through the shell in way of the load water line, all provided with automatic non-return valves of the screw down system. WITH. OPER/SHOT INDICATORS.

Particulars of Side Scuttles :—

Below freeboard deck 12 s.s. 11 ps brass light glazes provided with cast steel fixed dead lights @ 12"
On fore side 8 s.s. 7 ps brass side scuttles provided with cast steel fixed dead lights @ 12"

Vertical distance of Sill of lowest Side Scuttle above top of keel 2450 mm. ✓

Particulars of Guard Rails :—

Main deck steel bulwark 1070 mm height, stanchions 1500 mm apart.
Fore-castle deck, open rail 1030 " " , 4 rods stanchions 1400 mm apart

Particulars of Gangways, Lifelines, etc. :—

Hand rails on ER casing 3 ps.
LIFELINES. FITTED.

Particulars of Freeing Arrangements.

	Length of Bulwark	Height of Bulwark	Size of Freeing Ports	Number each side	Area each side	Rule area each side
After Well	21350 27000	1070	700 x 440	4	1.23 m ²	1.295 two for reduced draught
Forward Well	✓					

State position of each freeing port { After Well :— from fore bulk head 3.68, 2.95, 2.95, 3.00 m.
(F. and A. position and height above deck edge) { Forward Well :— ✓
180

State whether the freeing ports are fitted with shutters, bars, or rails, and give particulars of such :— shutters on bars.

Additional area where sheer is less than standard.




© 2021

Lloyd's Register
Foundation

010416-010427-0286 2/2

PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS.										
Description of Hatchway	I shore	II forehold	III shore	IV forehold	V Aft hold	VI shore aft	VII sky light
Dimensions of Hatchway	450x550	1210x1210	450x550	1210x1210	2000x1800	900x1800	900x1000
COAMINGS	Height above Deck	150 ✓	610 ✓	130 ✓	130 ✓	740 ✓	460 ✓	760 ✓
	Thickness	{ Sides	...	7 ✓	7 ✓	7 ✓	7 ✓	7 ✓	7 610 ✓	7 ✓
		{ Ends	...	7 ✓	7 ✓	7 ✓	7 ✓	7 ✓	7 ✓	7 ✓
	Stiffeners	✓	✓	✓	✓	angle 120x90x9 ✓	✓	✓
Brackets, Stays	✓	✓	✓	✓	✓	✓	✓
HATCH BEAMS	Number	✓	✓	✓	✓	✓	✓	✓
	Spacing	✓	✓	✓	✓	✓	✓	✓
	Scantling and Sketch	✓	✓	✓	✓	✓	✓	✓
FORE AND AFTERS	Number	✓	✓	✓	✓	030 ✓	✓	✓
	Spacing	✓	✓	✓	✓	2000 ✓	✓	✓
	Unsupported Lengths	✓	✓	✓	✓	150 ✓	✓	✓
	Scantling* and Sketch	✓	✓	✓	✓	 160 ✓	✓	✓
Bearing Surface	✓	✓	✓	✓	75 ✓	✓	✓
HATCH COVERS	Material	steel	steel	steel	steel	Teak	steel	steel
	Thickness	6	6	6	6	60mm	6 1/2 ✓	6 1/2 ✓
	How fitted	w.t. hinged	w.t. hinged	w.t. hinged	w.t. hinged	transv.	w.t. hinged	w.t. hinged
	Bearing Surface	6 toggles	11 toggles	6 toggles	6 toggles	75mm	8 toggles	flaps
Spacing of Cleats	✓	✓	✓	✓	520	✓	with 4
Number of Tarpaulins	✓	✓	✓	✓	2	✓	fixed light glass
*Are wood fore and afters steel shod at all bearing surfaces?										yes.
Are battens and wedges efficient and in good condition?										"
Are tarpaulins in good condition and in accordance with rule requirements?										"
Are lashings provided in accordance with rule requirements?										2 ball-barr "
for No. I hatch. This hatch has been provided with 4 12" x 2 fixed side glances with cast steel hinged dead lights.										

Particulars of any special features :—

