

S.S. "MAURITANIA".

ANCHORS, CABLES AND WIRE AND MANILLA ROPES.

Bower Anchors, working, (Stockless).....2 @ 10 tons.
do. spare " 1 not less than $8\frac{1}{2}$ tons.
Stream Anchors.....None (see steel hawser).
Kedge Anchors.....1 @ 40 cwt. ex. stock.
Grapnels, Stockless. (one of 60 lbs for each boat.
Boats Anchors. (
Spare bower anchor shackles. 2
Spare chain cable shackles. 2
Bower Cables. 330 fms. of $3\frac{3}{4}$ ".
Stream Chain. None (See steel hawser).
Mooring Chain. None.

Steel Wire Hawasers.

8" (reel not wanted). 2-90 fms. each in place of *stream chain*
7" " " " 1 - 150 fms.
5 $\frac{1}{2}$ " None.
3 $\frac{3}{4}$ " with reels complete. 2 - 120 fms.
3 $\frac{1}{2}$ " " " " 2 - 120 fms.


N.B.

The 8" hawasers to have shackles, eyes and thimbles at each end and to be stowed in the chain locker (reel not wanted).

The 7" hawser to be similarly fitted and stowed.

Warps of straight laid Manilla Rope.-

10" 2 @ 90 fathoms.
8" 10 @ 120 "
6" 2 - 120 "

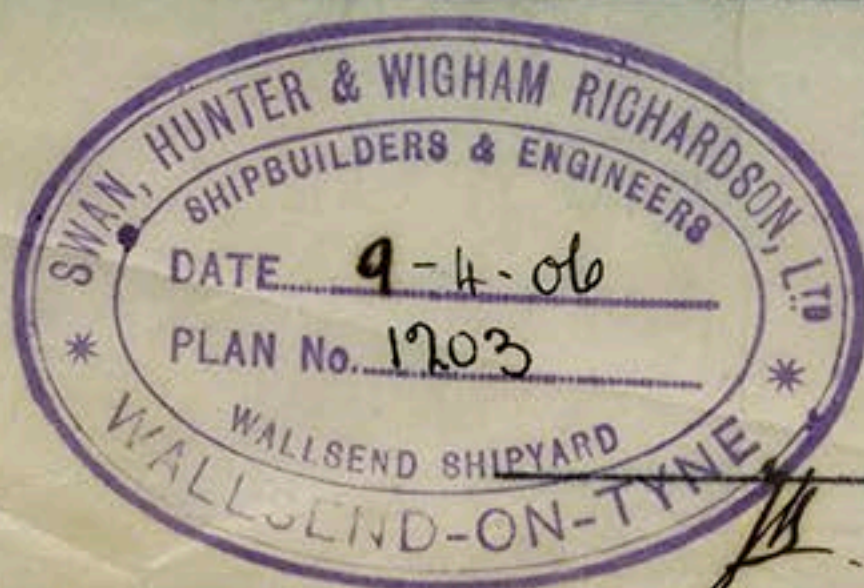

© 2018

Lloyd's Register
Foundation

From SWAN, HUNTER, & WIGHAM RICHARDSON, Ltd.

For Enclosure to

Messrs.

Date

Lloyd's
London Office
2019

9th 50

LR

Lloyd's Register
Foundation