


Lloyd's Register of Shipping.

SURVEYS FOR FREEBOARD.

(CONDITIONS OF ASSIGNMENT.)

Ship's Name T.R.V. 8.Port of Survey Hufl.Official Number ✓Surveyor's Signature F. L. PalmerNationality and Port of Registry BRITISH - ✓Date of Survey During Construction

Disposition and dimensions of superstructures, trunks, deckhouses and machinery casings to be inserted in the diagrams and tabular statement:—

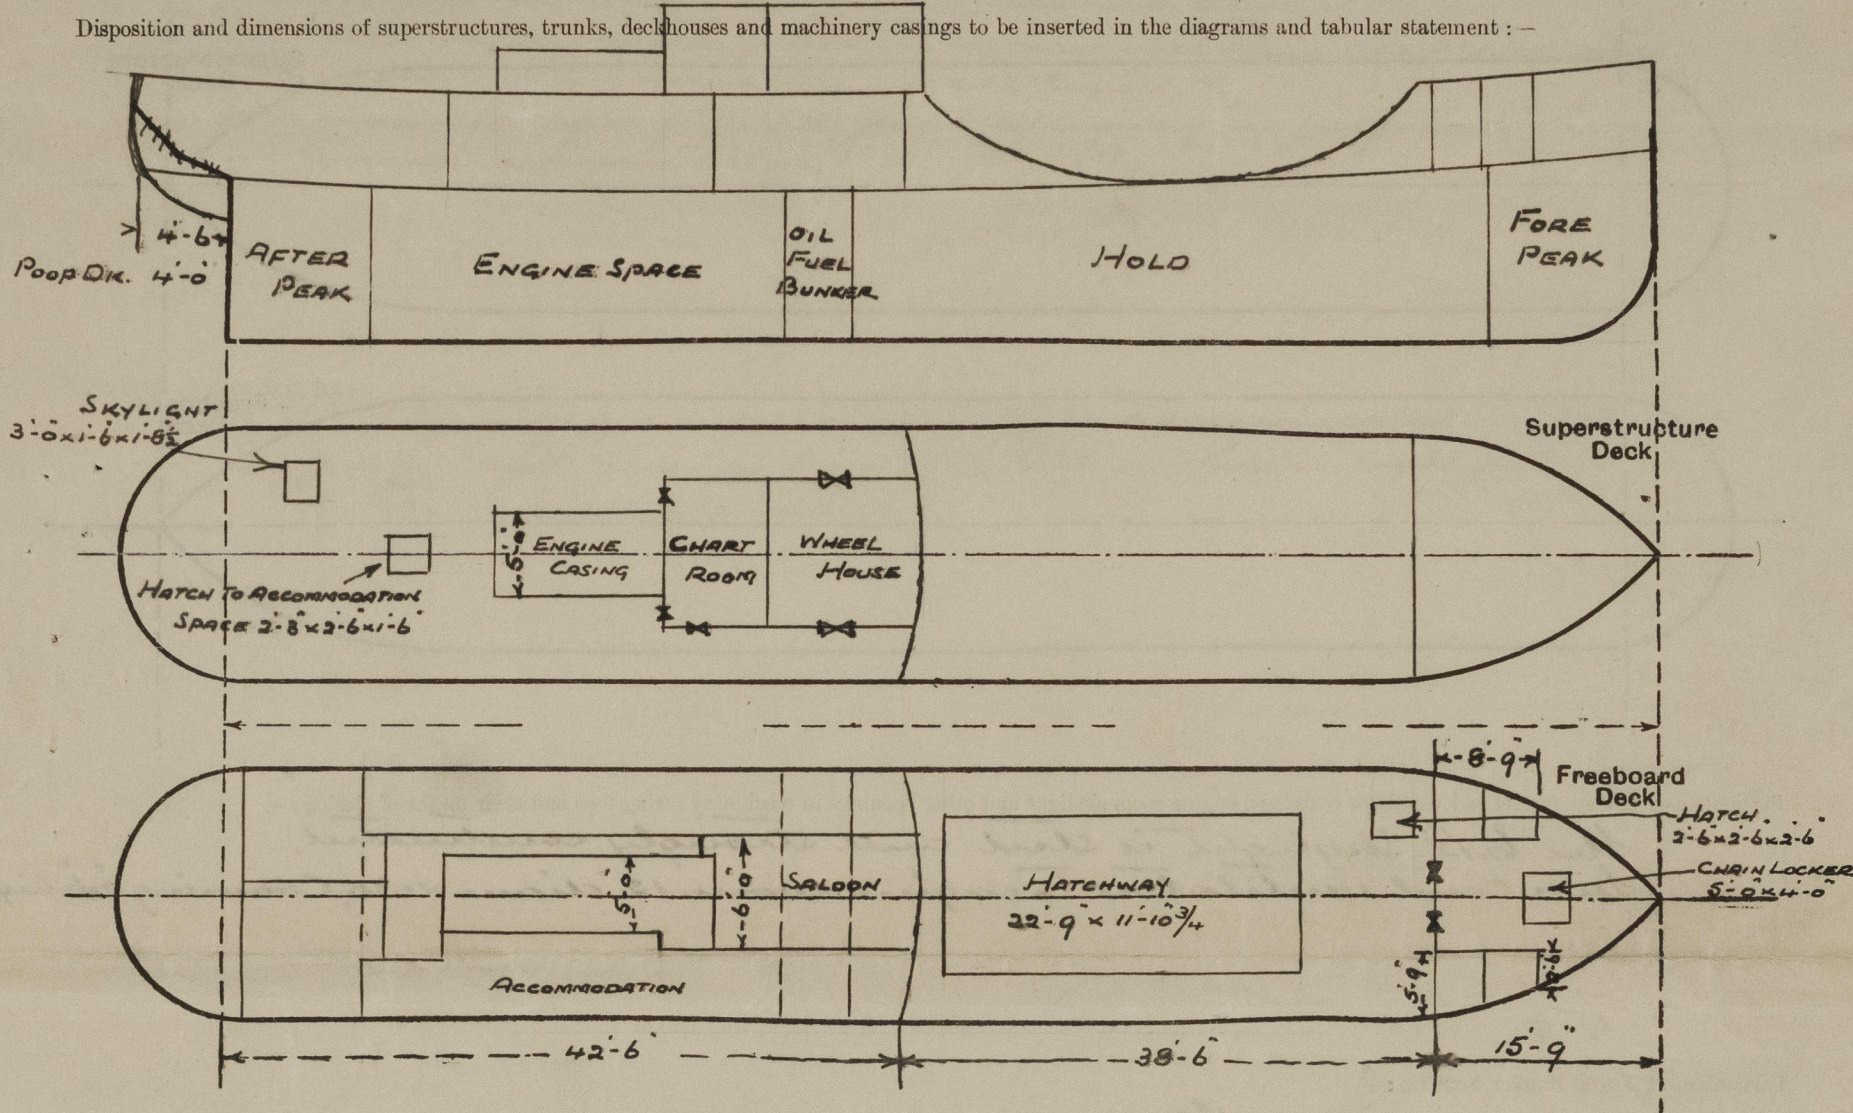

Particulars of Superstructures, Trunks, Casings, Deckhouses.


	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height of Casings
Poop Bulkhead ...	✓	.30	5x3x.375/30	31"	BKTS AT BOTTOM LUGS AT TOP	NONE	✓	7'-0"
Raised Quarter Deck Bulkhead ...								
Bridge, After Bulkhead ...								
Bridge, Forward Bulkhead ...								
Forecastle Bulkhead ...	✓	.20	2 1/2 x 2 1/2 x .25	25"	NONE	TWO 4'-0" x 3'-6"	15"	6'-6"
Trunk, Aft ...								
Trunk, Forward ...								
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...								
Exposed Machinery Casings on Superstructure Decks ...	✓	.25	2 1/2 x 2 1/2 x .25	21"	BKTS AT TOP ONLY	TWO 4'-7" x 1'-9" (SS) ONE 4'-7" x 1'-9" (PS)	18"	3'-0"
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...								
Deckhouses on Flush Deck Ships ...								

Particulars of Closing Appliances (state if capable of being manipulated from both sides).

Poop Bulkhead ...	No OPENINGS
Raised Quarter Deck Bulkhead ...	✓
Bridge, After Bulkhead ...	✓
Bridge, Forward Bulkhead ...	✓
Forecastle Bulkhead ...	2 3/8" SIFTING BOARDS IN ANGLES FORMING CHANNELS RIVETED TO BULKHEAD.
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	THREE HINGED STEEL DOORS, OPERATED FROM BOTH SIDES. TWO HORIZONTAL SLIDING STEEL DOORS TO WHEELHOUSE 5'-6" x 1'-10".
Exposed Machinery Casings on Superstructure Decks ...	✓
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	✓
Deckhouses on Flush Deck Ships ...	✓

PARTICULARS OF PROTECTION TO OPENINGS, ETC.

The following diagrams should be used to indicate the positions of cargo and coaling hatchways, gangway, cargo and coaling ports, ventilators, companionways, etc., which would affect the seaworthiness of the ship:—

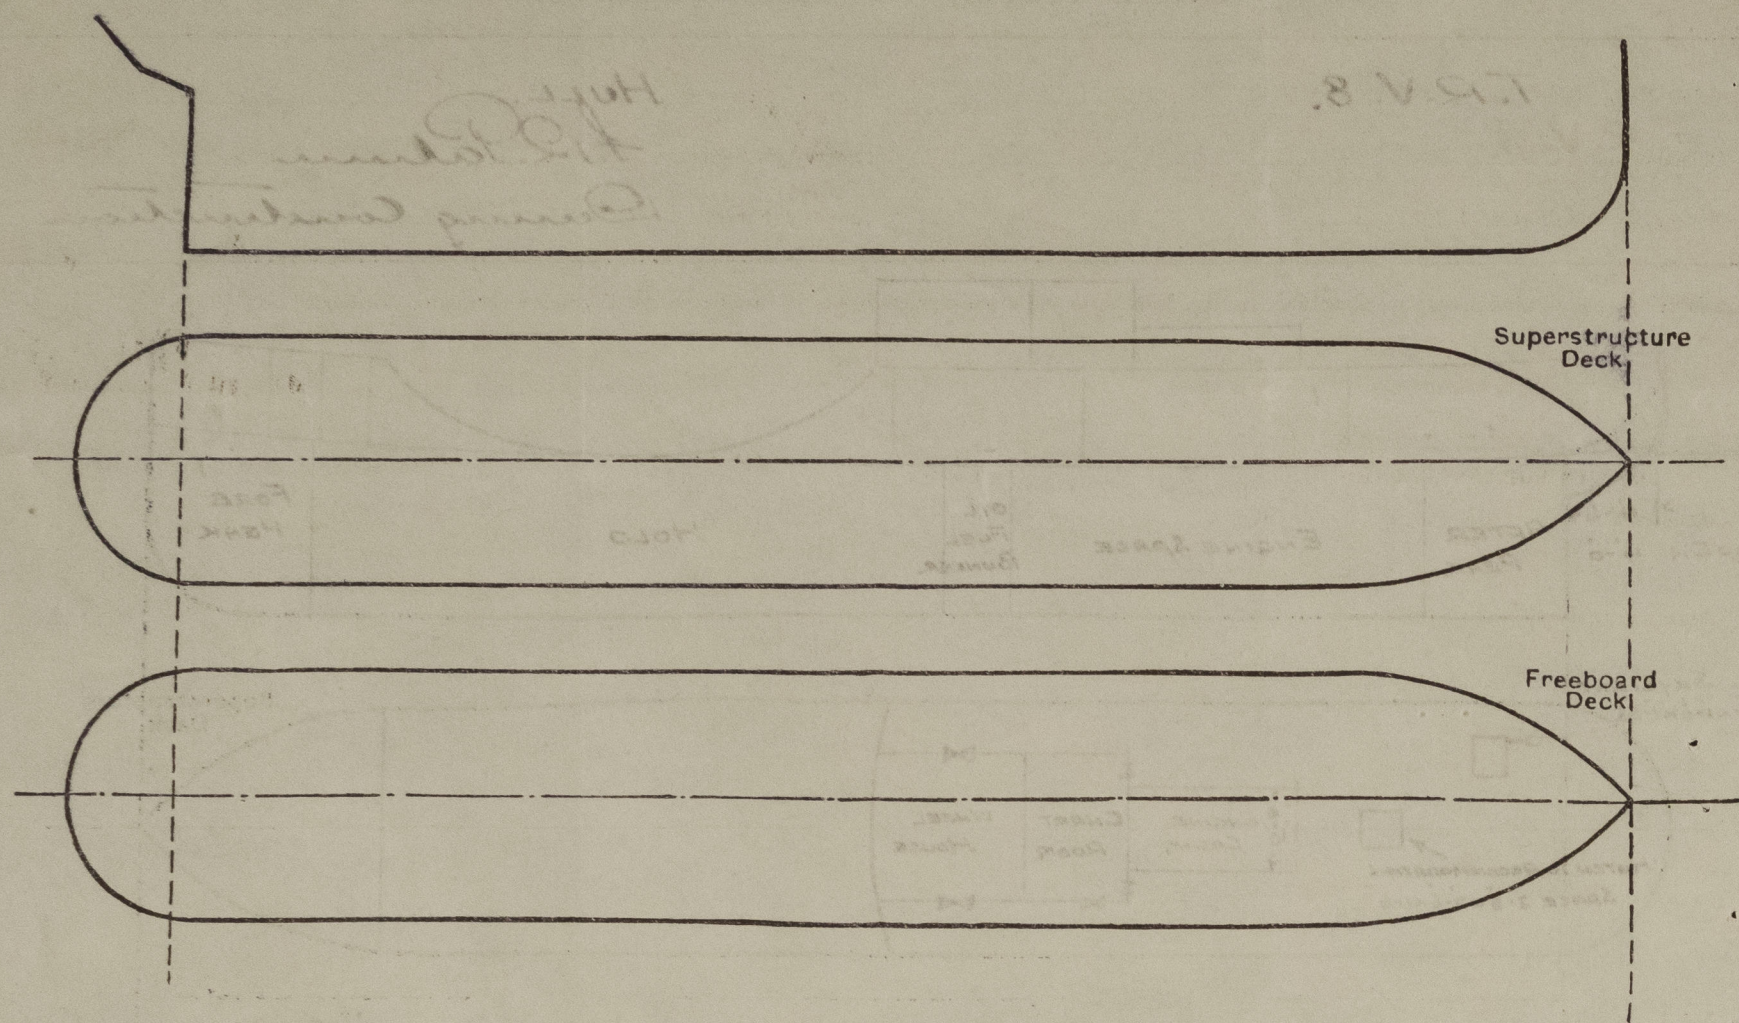

Particulars of fiddley, funnel and ventilator coamings, engine room skylight and other openings in machinery casing tops and their means of closing :—

The E. I. 2. Skylight is steel and strongly constructed.
Two cowb ventilators to engine room 12" diam x 30" Coaming 2-6 high.

Particulars of Flush Bunker Scuttles :—

None

Particulars of Companionways :—

Ночью.

Particulars of Ventilators in exposed positions on freeboard and superstructure decks :—

Two ventilators on file decks 6" diam, covering 36" led to file space.	✓
Two " " floorboard " 12" " " 36" " " hold.	✓
Four " " poop " 6" " " 30" " " poop space	✓

All ventilators are constructed in accordance with the Rules and provided with wood plugs and canvas cover.

Particulars of Air Pipes in exposed positions on freeboard, raised quarter, or superstructure decks :—

One C.F. Air pipe on file deck 2'-0" high x 3" diam to F.R. tank.
One " " " " " 1'-6" " x 3" " " A.P. "
Two " " " " " 3'-3" " x 2 1/2" " " F.W. tank.

Wood plugs with chain attachments are provided for closing the openings.

Particulars of Gangway Cargo and Coaling Ports:—

None.

T. R. V. 8.

Particulars of Scuppers and Sanitary Discharge Pipes :—

2-4" diam discharge (Sanitary) pipes from W.C.'s in poop space on port side.
two automatic non-return valves fitted to each discharge, Ship's side
valve (gunmetal) about 2'-0" below parboard deck in machinery space.
4 1/2" and 2 (5") 1 1/2" diam scupper pipes from gallery @ wash places in poop,
two automatic non-return valves fitted to each discharge, Ship's side
valve (gunmetal) about 2'-0" below parboard deck.
All valves with positive means of closing are fitted with
the upper valve accessible at all times.
2-3" diam scupper pipes (SS) from alleyway in poop each direct
to engine room bilge.

Particulars of Side Scuttles :—

Nine (9) and eleven (11) accommodations spaces in poop and one (1) in j/c, all 10" diam and fitted with hinged deadlights.

Vertical distance of Sill of lowest Side Scuttle above top of keel

14-2

Particulars of Guard Rails :—

Fixed round file and poop decks and hinged at sides of foreboard decks.

3.75

Particulars of Gangways, Lifelines, etc. :—


Lifelines fitted from file to poop deck (p/s)

Particulars of Freeing Arrangements.						
	Length of Bulwark	Height of Bulwark	Size of Freeing Ports	Number each side	Area each side	Rule area each side
After Well		<i>None</i>				
Forward Well						

State position of each freeing port { After Well :—
(F. and A. position and height above deck edge) { Forward Well :—

State whether the freeing ports are fitted with shutters, bars, or rails, and give particulars of such :—

Additional area where sheer is less than standard.



© 2021
Lloyd's Reg
Foundation

PARTICULARS OF PROTECTION TO OPENINGS, ETC.


HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS.									
		FREEBOARD DK		ROOF DECK					
Description of Hatchway	MAIN	HATCH TO STORE	TO ACCOMMODATION SPACE				
Dimensions of Hatchway	22'-9" x 11'-10 3/4"	2'-6" x 2'-6"	2'-3" x 2'-6"				
COAMINGS	Height above Deck	...	2'-4"	2'-6"	1'-6"				
	Thickness	Sides Ends				
				
	Stiffeners	...	6 x 3 x 33 BQ.	✓	✓				
	Brackets, Stays	...	4	✓	✓				
HATCH BEAMS	Number	...							
	Spacing	...	✓	✓	✓				
	Scantling and Sketch	...							
FORE AND AFTERS	Bearing Surface	...							
	Number	...	3 FIXED						
	Spacing	...							
	Unsupported Lengths	...							
	Scantling* and Sketch	...							
	Bearing Surface	...							
HATCH COVERS	Material	...	STEEL TOP	HINGED STEEL					
	Thickness	...	3/8"	PLATE COVERS (W.T.)					
	How fitted	...	WITH 3/4" HINGED STEEL PLATE COVERS (W.T.)						
	Bearing Surface	...	✓						
Spacing of Cleats							
Number of Tarpaulins							

*Are wood fore and afters steel shod at all bearing surfaces? ✓
 Are battens and wedges efficient and in good condition? ✓
 Are tarpaulins in good condition and in accordance with rule requirements? ✓
 Are lashings provided in accordance with rule requirements? ✓

Particulars of any special features:—

Endorsement at first survey and at surveys for renewal of Certificate:—

The fittings and appliances are in accordance with the particulars shown on this form (or as now modified) and are in good condition.



© 2021

Lloyd's Register Foundation