

Lloyd's Register of Shipping.  
SURVEYS FOR FREEBOARD.  
(CONDITIONS OF ASSIGNMENT.)

Ship's Name "EARNER."

Port of Survey HULL.


Official Number NONE

Surveyor's Signature J. Macleod

Nationality and Port of Registry BRITISH

Date of Survey During construction

Disposition and dimensions of superstructures, trunks, deckhouses and machinery casings to be inserted in the diagrams and tabular statement: -

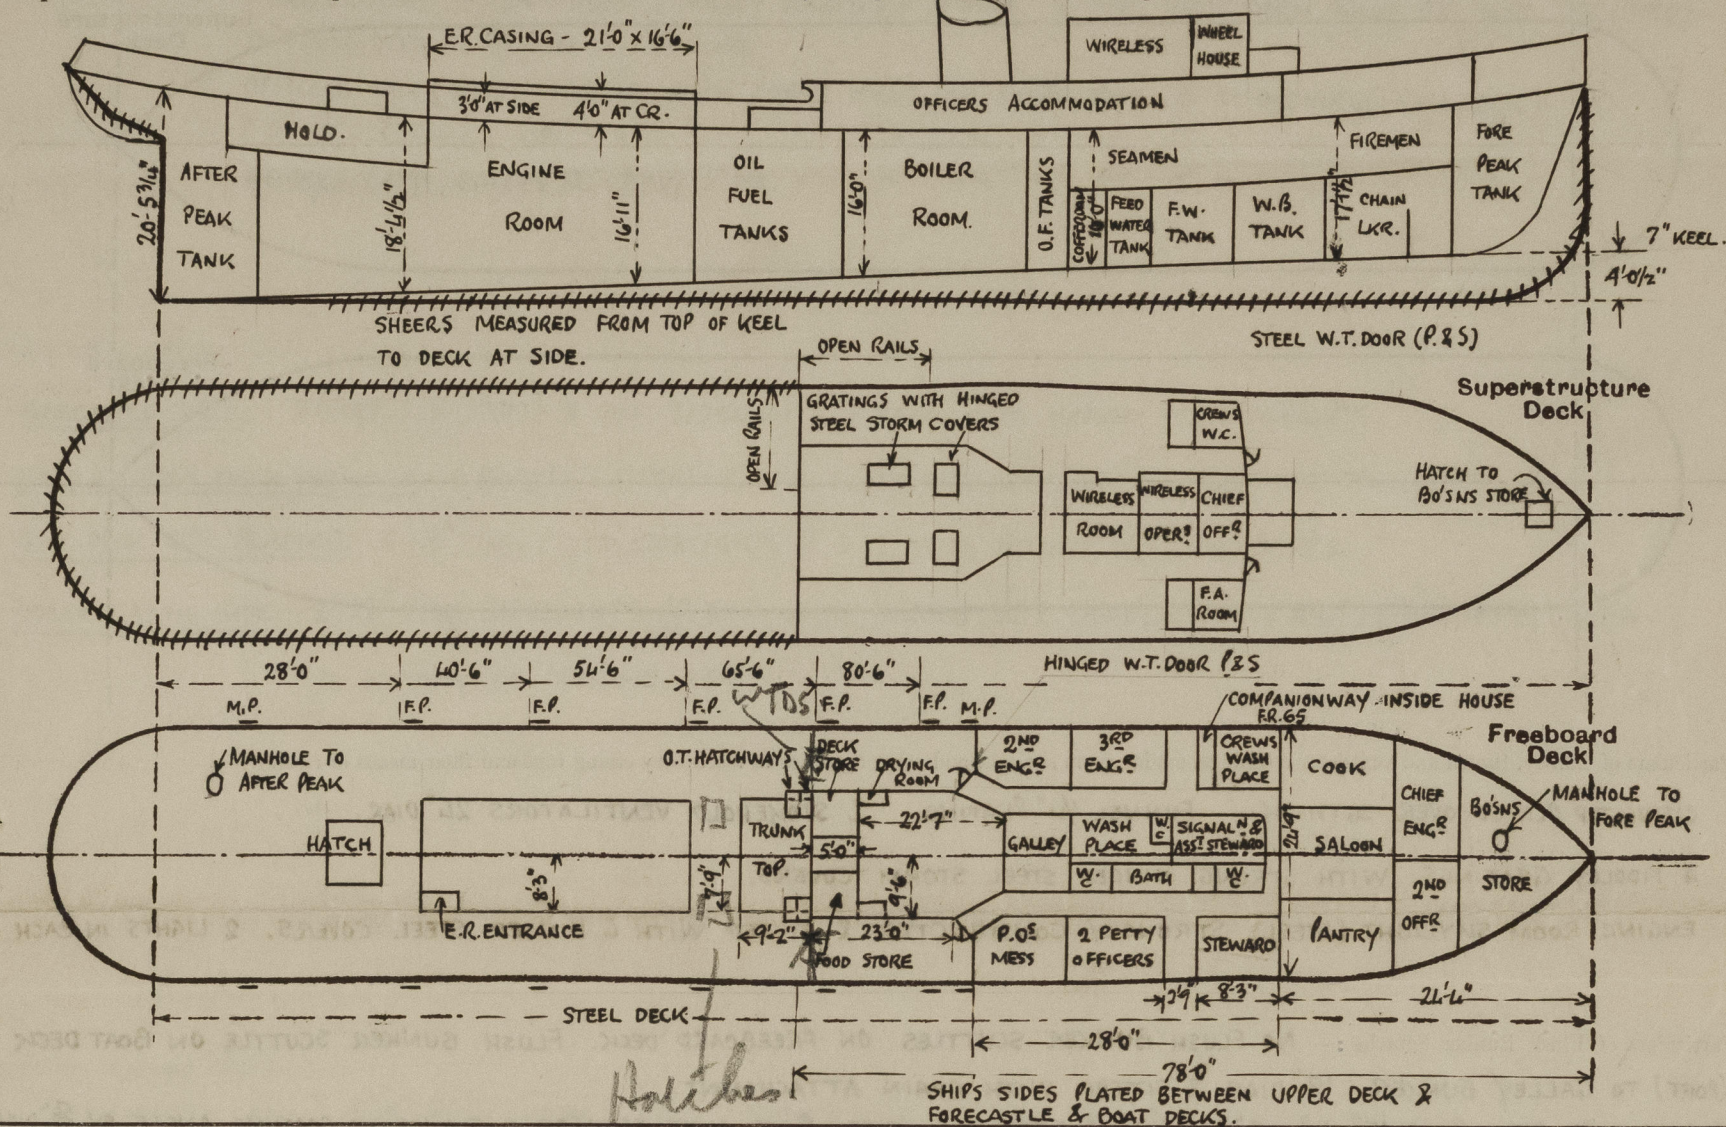


Particulars of Superstructures, Trunks, Casings, Deckhouses.								
	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height of Casings
Poop Bulkhead ... ..	✓	✓						
Raised Quarter Deck Bulkhead ...	✓	✓						
Bridge, After Bulkhead ... ..	✓	✓						
Bridge, Forward Bulkhead ... ..	✓	✓						
Forecastle Bulkhead ... FRAME N <sup>o</sup> 65	✓	25	2½ x 2½ x 25 Γ	30"	NONE	4'10" x 1'9"	15"	7'3"
Trunk, Aft ... (FRAME N <sup>os</sup> 31-36) ...	30	30	3 x 2½ x 30 Γ	30"	NONE	4 O.T. HATCHWAYS ON TOP OF TRUNK	✓	3'0"
Trunk, Forward ... ..	✓	✓						
Exposed Machinery Casings on Freeboard or Raised Quarter Deck ...	18" x 32	28	3½ x 2½ x 30 Γ 7" x 3" x 40 Γ	APPROX 24"	BKTS. AT TOP	4'0" x 1'9"	24"	7'3"
Exposed Machinery Casings on Superstructure Decks ... ..	✓							
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ... ..	✓							
Deckhouses on Flush Deck Ships ...	✓							
Particulars of Closing Appliances (state if capable of being manipulated from both sides).								
Poop Bulkhead ... ..	✓							
Raised Quarter Deck Bulkhead ...	✓							
Bridge, After Bulkhead ... ..	✓							
Bridge, Forward Bulkhead ... ..	✓							
Forecastle Bulkhead ... ..	TO SALOON, ACCOMMODATION & WASH PLACES ETC., WOOD DOORS 4'10" x 1'9" x 1¾" THICK WITH 15" SILLS. TO DECK STORE (PORT) STEEL DOOR 4'0" x 1'9" - 24" SILL. TO DRYING ROOM (P.&S) STEEL DOORS 4'3" x 1'9" - 21" SILLS. TO GALLEY (P.&S) STEEL DOORS (IN HALVES) 5'0" x 1'9" - 15" SILLS. TO FOOD STORE (STBD) W.T. DOOR 4'0" x 2'3" - 24" SILL.							
Exposed Machinery Casings on Freeboard or Raised Quarter Deck ...	TO BOILER ROOM (P.&S) 4'0" x 1'9" - 24" SILL.							
Exposed Machinery Casings on Superstructure Decks ... ..	ENTRANCE DOOR OF COMPANION ON UPPER DECK FORWARD (PORT) WOOD DOOR 4'7" x 1'9" x 1¾" THICK - 18" SILL.							
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ... ..	✓	ALL DOORS FITTED WITH SPRING LOCKS OPERATED FROM BOTH SIDES.						
Deckhouses on Flush Deck Ships ...	✓							



" EARNED

Particulars of Gangway Cargo and Coaling Ports:—

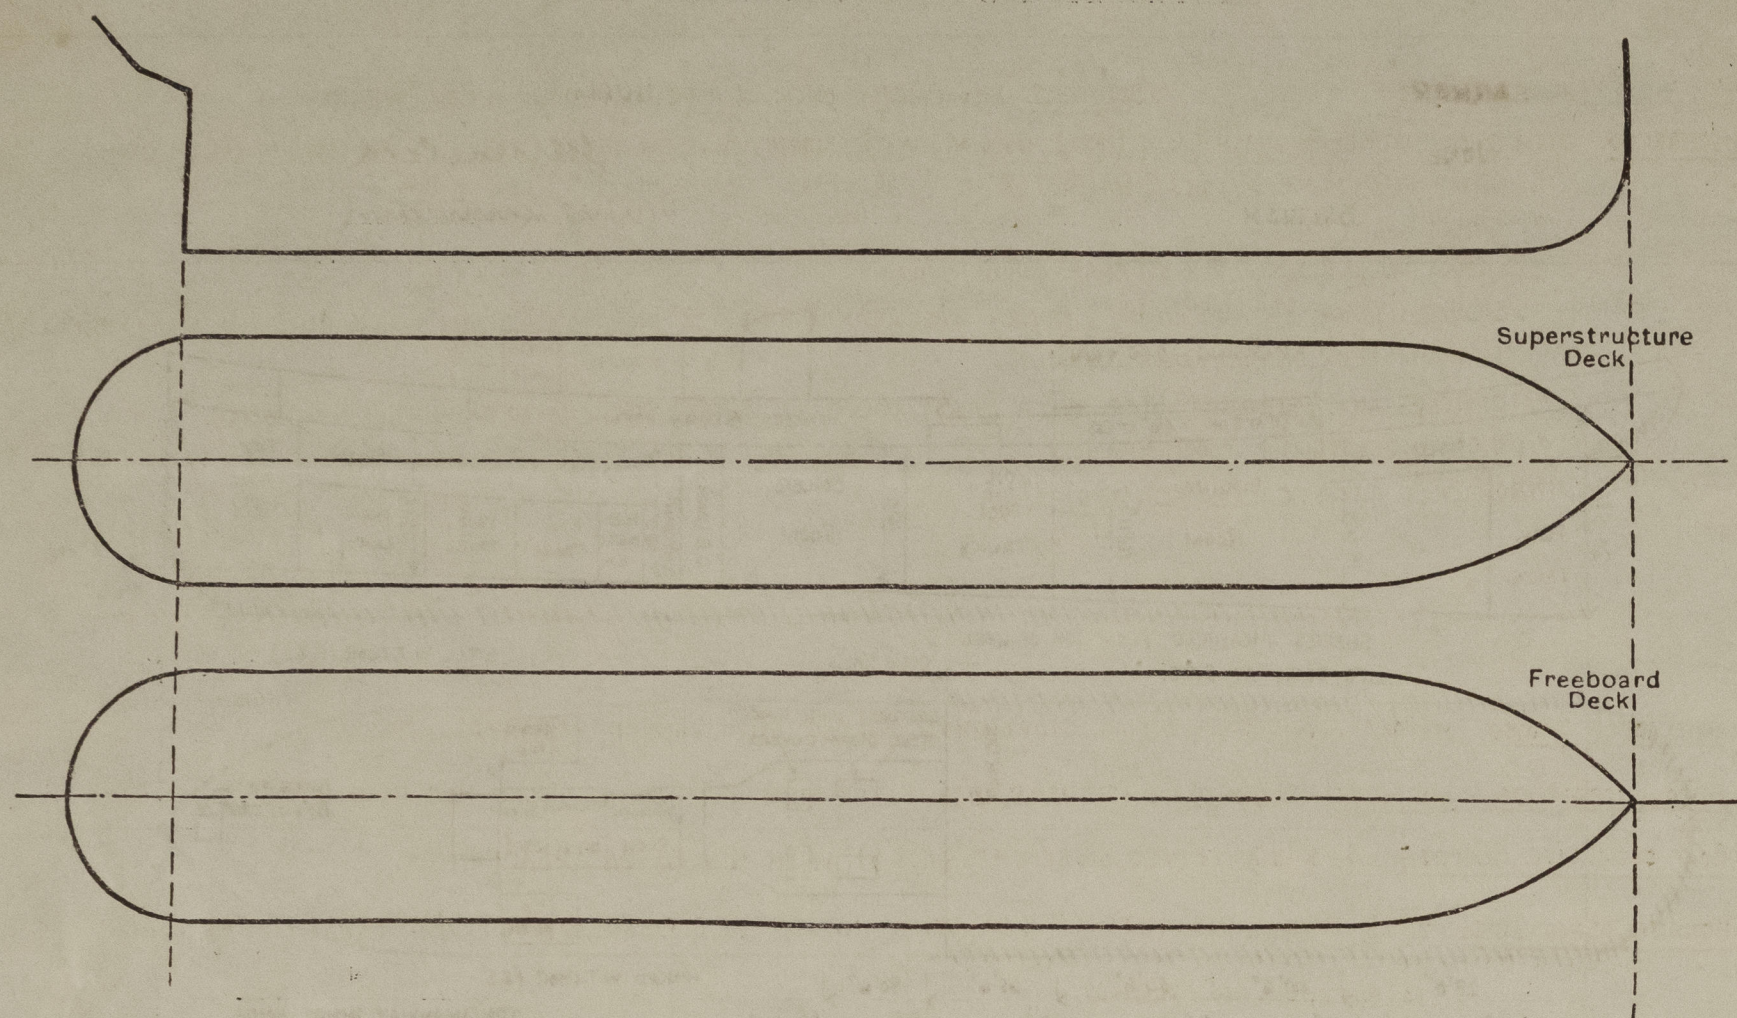

Particulars of Scuppers and Sanitary Discharge Pipes :— SCUPPERS, FROM UPPER DECK. 6 P. & S. CUT THRO' SHEER STRAKE.

DISCHARGES. FROM CHIEF ENGINEER'S WASH BASIN (PORT). 1½" DIAR. WITH STORM VALVE ON SHIP'S SIDE - 16" TO OPENING (FROM DECK). ✓

" CREW'S WASH PLACE & COOKS ROOM (PORT) 2½" " " " " " " " - 14½" " " " " ✓

" CREW'S W.C. (PORT). 4" " " " " " " " - 15" " " " " ✓

" CREW'S WASH PLACE, 2<sup>ND</sup> & 3<sup>RD</sup> ENGR'S CABINS; 3" DIA. " " " " " " " - 15" " " " " ✓

" STEWARDS ROOM, 2<sup>ND</sup> OFF<sup>RS</sup> ROOM & PANTRY WASH BASIN & SINK. 2" DIAR. WITH STORM VALVE ON SHIP'S SIDE (STBD) - 13" FROM DECK TO BOTTOM OF OPENING. ✓

" OFFICERS W.C. (STBD) 4" DIAR. WITH STORM VALVE ON SHIP'S SIDE. 15" TO OPENING (FROM DECK). ✓

" P.O.'S W.C. (STBD) 4" " " " " " " " 15" " " " " ✓

" OFFICER'S BATH, GALLEY & C. (STBD) 3" DIA. " " " " " " " 15" " " " " ✓

Particulars of Side Scuttles :—

FORECASTLE SPACE:- 6 (PORT) & 5 (STBD) - 8" DIAR. SIDELIGHTS FITTED WITH HINGED W.I. DEADLIGHTS.

BELOW UPPER DECK FORWARD. 6 (PORT) & 5 (STBD) - 8" DIAR. FIXED SIDELIGHTS WITH HINGED W.I. DEADLIGHTS

BOAT DECK SIDE PLATING. 4-8" DIAR. FIXED SIDELIGHTS (P. & S). WITH HINGED W.I. DEADLIGHTS. ✓

Vertical distance of Sill of lowest Side Scuttle above top of keel 13'-10" - 42'-0" FROM F.P.

Particulars of Guard Rails :—

ON FORECASTLE DECK. 3'10" HIGH WITH 3 RODS. STANCHIONS SPACED 3'9" APART. ✓

ON BOAT DECK (AFTER END) 3'-3" " " " " 4'-0" " ✓

" " " (AT SIDES) 2'4" " 2 Rods. " " 3'6" " ✓

Particulars of Gangways, Lifelines, etc. :—


NONE.

Particulars of Freeing Arrangements.						
	Length of Bulwark	Height of Bulwark	Size of Freeing Ports	Number each side	Area each side	Rule area each side
After Well ... ..	65'0" ✓	4'0" ✓	28" x 16 1/2" ✓	5 ✓	16.0 \$	13.0 \$
Forward Well ... ..	✓	✓				

State position of each freeing port ... .. { After Well :— FOR POSITION SEE SKETCH ON PAGE 1. 7 1/2" ABOVE DECK EDGE. ✓  
(F. and A. position and height above deck edge) { Forward Well :— ✓

State whether the freeing ports are fitted with shutters, bars, or rails, and give particulars of such :— BALANCED STEEL SHUTTERS. ✓

Additional area where sheer is less than standard.



© 2021  
Lloyd's Register Foundation



PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS.									
Description of Hatchway			TRUNK TOP 4 O.T. HATCHWAYS TO AFTER OIL FUEL TANKS		UPPER DECK HATCH TO HOLD AFT.	UPPER DECK 2 O.T. HATCHWAYS TO SIDE OIL FUEL TANKS	FORECASTLE DECK HATCHWAY TO BO'S'NS + STORE		
Dimensions of Hatchway			2 AT 2'6" x 2'6" ✓ 2 AT 2'6" x 1'9" ✓		8'0" x 6'0"	11'2" x 9'2" ✓	2'9" x 2'9" ✓		
COAMINGS	{	Height above Deck	48"		27"	15"	12"		
		Thickness { Sides	30 ✓		40 ✓	30 ✓	37 1/2 ✓		
		Thickness { Ends	30		40	30	37 1/2		
		Stiffeners ...	NONE ✓		NONE	NONE	NONE		
Brackets, Stays									
HATCH BEAMS	{	Number ...							
		Spacing ...							
		Scantling and Sketch	NONE ✓		NONE	NONE	NONE ✓		
Bearing Surface									
FORE AND AFTERS	{	Number ...							
		Spacing ...							
		Unsupported Lengths							
		Scantling* and Sketch	NONE ✓		NONE	NONE	NONE ✓		
Bearing Surface									
HATCH COVERS	{	Material ...	STEEL COVER PLATE .50		NINE	STEEL COVER PLATE .375	STEEL COVER PLATE		
		Thickness ...	SECURED BY 7/8" DIAR.		3"	SECURED BY 7/8" DIAR.	SECURED BY 7/8" DIAR.		
		How fitted	EYEBOLTS WITH ✓		F.B.A. ✓	EYEBOLTS WITH ✓	EYEBOLTS WITH ✓		
		Bearing Surface	GUNMETAL TOGGLES.		3"	GUNMETAL TOGGLES	GUNMETAL TOGGLES.		
Spacing of Cleats			✓		24" ✓	✓	✓		
Number of Tarpaulins					2				
<p>*Are wood fore and afters steel shod at all bearing surfaces ? <i>yes.</i></p> <p>Are battens and wedges efficient and in good condition ? <i>yes.</i></p> <p>Are tarpaulins in good condition and in accordance with rule requirements ? <i>yes.</i></p> <p>Are lashings provided in accordance with rule requirements ? <i>yes.</i></p>									

Particulars of any special features :—

Endorsement at first survey and at surveys for renewal of Certificate :—

The fittings and appliances are in accordance with the particulars shown on this form (or as now modified) and are in good condition.

