

Lloyd's Register of Shipping.
SURVEYS FOR FREEBOARD.
(CONDITIONS OF ASSIGNMENT.)

Index No. 39918
(For London Office only).

110 NOV 1948

25429.

Ship's Name "ST. ARVANS." (Ex SAMLYTH.)

Port of Survey NEWPORT. MON.


Official Number 169894

Surveyor's Signature M. Henderson

Nationality and Port of Registry BRITISH. NEWPORT. MON

Date of Survey 8th Nov. 1948

Disposition and dimensions of superstructures, trunks, deckhouses and machinery casings to be inserted in the diagrams and tabular statement:—

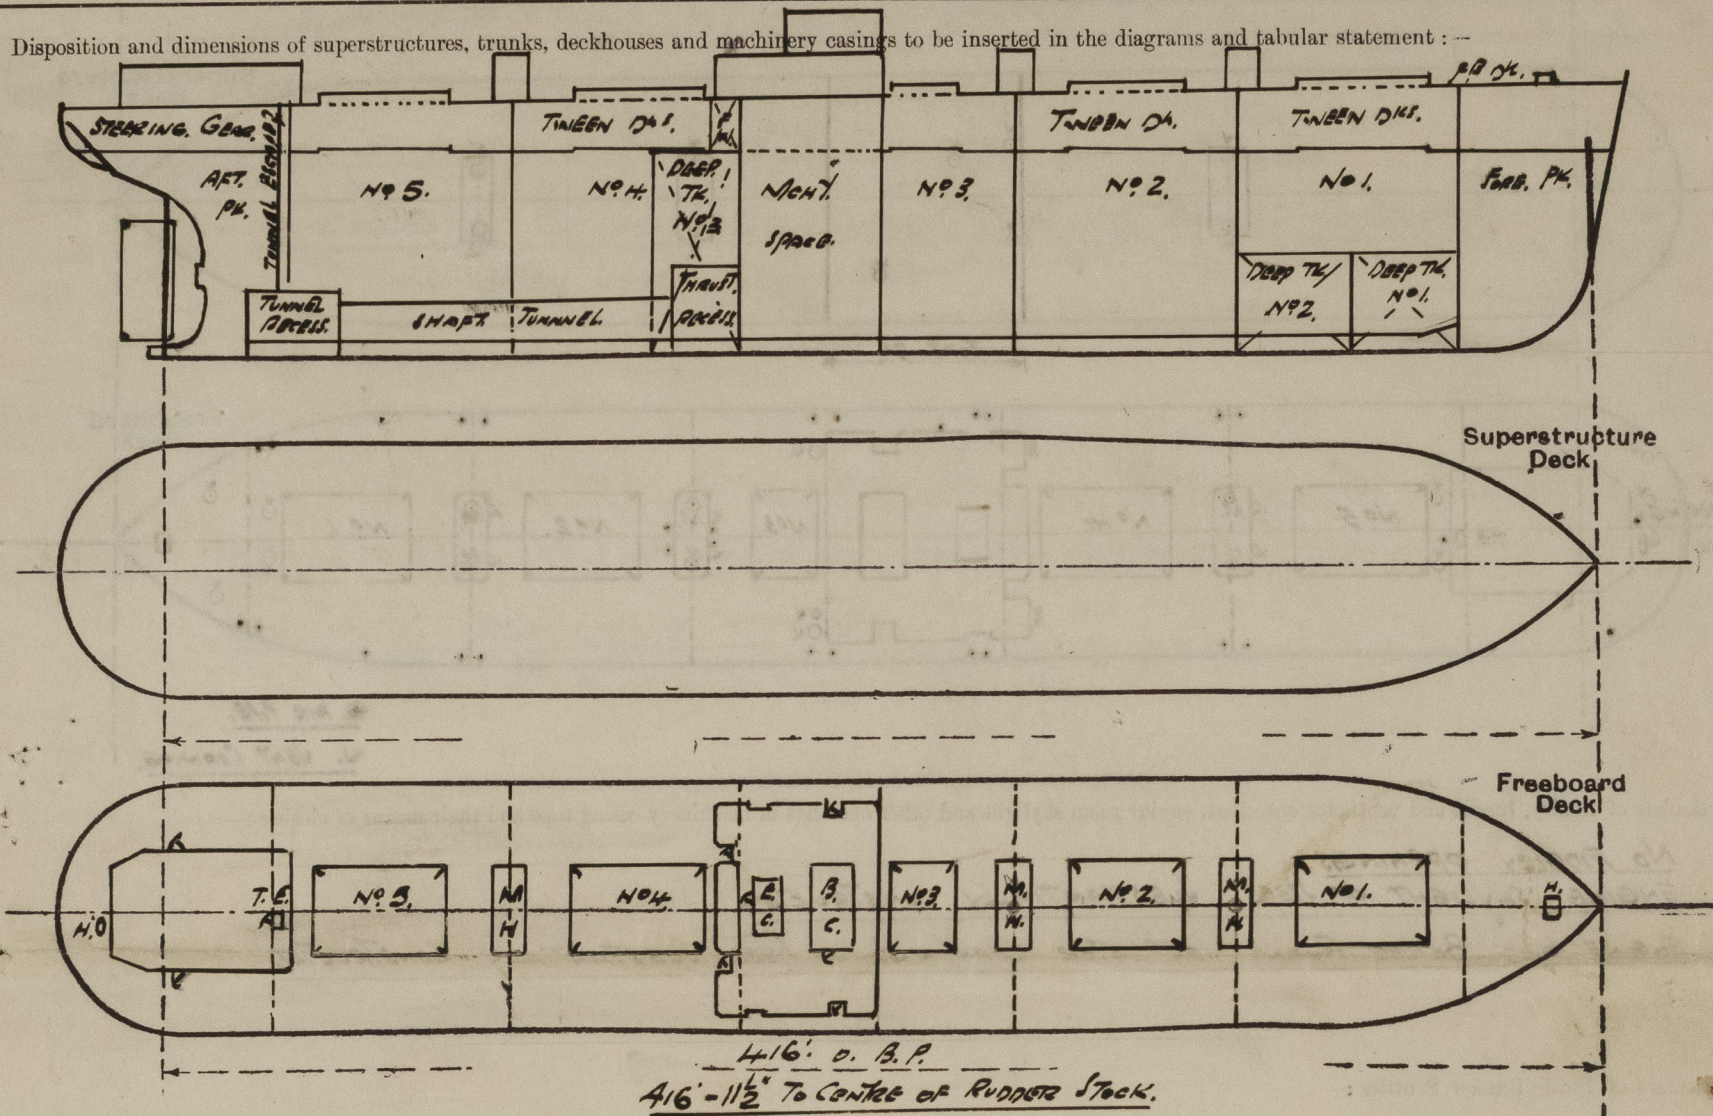

Particulars of Superstructures, Trunks, Casings, Deckhouses.								
	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height of Casings
Poop Bulkhead	✓							
Raised Quarter Deck Bulkhead ...	✓							
Bridge, After Bulkhead	✓							
Bridge, Forward Bulkhead	✓							
Forecastle Bulkhead	✓							
Trunk, Aft	✓							
Trunk, Forward	✓							
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	✓							
Exposed Machinery Casings on Superstructure Decks	✓							
Machinery Casings within Superstructures not fitted with Class I Closing Appliances	✓							
Deckhouses on Flush Deck Ships ...	7' 4"	50.	DIVISIONAL BRGS. 4" x 3" x .32. E.W.	26"	BRACKETED TOP. BATTEN. E.W.	4' 0" x 2' 0"	17 1/2"	7' 4"
Particulars of Closing Appliances (state if capable of being manipulated from both sides).								
Poop Bulkhead	✓	} FLUSH DECK.						
Raised Quarter Deck Bulkhead ...	✓							
Bridge, After Bulkhead	✓							
Bridge, Forward Bulkhead	✓							
Forecastle Bulkhead	✓							
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	✓							
Exposed Machinery Casings on Superstructure Decks	✓							
Machinery Casings within Superstructures not fitted with Class I Closing Appliances	✓							
Deckhouses on Flush Deck Ships ...	HINGED STEEL W.T. DOORS. AT ALL OPENINGS. CAPABLE OF BEING MANIPULATED FROM BOTH SIDES.							

PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD DECK DECK.										
Description of Hatchway	No. 1.	No. 2.	No. 3.	No. 4.	No. 5.	To STEERING HEAD.	To Fore Peak STOW.			
Dimensions of Hatchway	33'9" x 20'0"	35'0" x 20'0"	20'0" x 20'0"	35'0" x 20'0"	35'0" x 20'0"	2'0" x 16'	3'0" x 3'0"			
COAMINGS	Height above Deck	36"	36"	36"	36"	15"	18"			
	Thickness	.63	.63	.63	.63	.40	.40			
	Sides									
	Ends									
Stiffeners										
	Brackets, Stays	3 x 3 x 7/16	3 x 3 x 7/16	3 x 3 x 7/16	3 x 3 x 7/16	3 x 3 x 7/16				
HATCH BEAMS	Number	6	6	3	6	6				
	Spacing	4'9"	5'0"	5'0"	5'0"	5'0"				
	Scantling and Sketch						NONE	NONE		
	Bearing Surface	3"	3"	3"	3"	3"				
FORE AND AFTERS	Number									
	Spacing									
	Unsupported Lengths									
	Scantling* and Sketch	NONE	NONE	NONE	NONE	NONE	NONE	NONE		
HATCH COVERS	Material	WOOD	WOOD	WOOD	WOOD	WOOD	HINGED W.T.	HINGED W.T.		
	Thickness	2 1/2"	2 1/2"	2 1/2"	2 1/2"	2 1/2"	STEEL LID.	STEEL LID.		
	How fitted	F.A.	F.A.	F.A.	F.A.	F.A.	WITH	WITH		
	Bearing Surface	3"	3"	3"	3"	3"	TOGGLES	TOGGLES		
Spacing of Cleats	24"	24"	24"	24"	24"					
Number of Tarpaulins	3	3	3	3	3					
*Are wood fore and afters steel shod at all bearing surfaces? NONE.										
Are battens and wedges efficient and in good condition? YES.										
Are tarpaulins in good condition and in accordance with rule requirements? YES.										
Are lashings provided in accordance with rule requirements? YES.										

Particulars of any special features :—

Endorsement at first survey and at surveys for renewal of Certificate :—

The fittings and appliances are in accordance with the particulars shown on this form (or as now modified) and are in good condition.

