

# LLOYD'S REGISTER OF SHIPPING

FOUNDED 1760 RE-CONSTITUTED 1834

## LLOYD'S MACHINERY CERTIFICATE (LMC)

This is to Certify that the Machinery of the

Motorship "BROOKLYN MARU"

9550 Tons, of Kobe

has been Specially Surveyed by the Surveyors to this Society during construction at Nagasaki

and was reported to be on the 16th July, 1960

in good working condition.

The Record  $\times$  LMC has been made in the Register Book, subject to Periodical Surveys as required by the Rules.


### PARTICULARS

Description of Machinery	Oil Engine 2 Stroke Cycle Single Acting
Makers of Main Engines	Mitsubishi Shipbuilding & Engineering Co. Ltd.,
Makers of Main Boilers	-
Approved pressure of Main Boilers	- lb. per square inch saturated steam - lb. per square inch superheated steam
Steam Temperature	-
Approved pressure of Aux. Boilers	100 lb. per square inch
Approved pressure of Steam Heated Steam Generators	- lb. per square inch
B.H.P. 13000	124 r.p.m. of Engine
Approved total S.H.P. -	at 124 r.p.m. of Propeller

Witness my hand  
 W. J. Ferguson Secretary  
 Stewart Chairman

71, Fenchurch Street, London, E.C.3. 11th November, 1960.

This Certificate is issued upon the terms of the Rules and Regulations of the Society to which Owners are referred, and which provide that:-  
 "While the Committees of the Society use their best endeavours to ensure that the functions of the Society are properly executed, it is to be understood that neither the Society nor any Member of any of its Committees is under any circumstances whatever to be held responsible for any inaccuracy in any report or certificate issued by the Society or its Surveyors, or in any entry in the Register Book or other publication of the Society, or for any error of judgment, default or negligence of any of its Committees or any Member thereof, or the Surveyors, or other Officers or Agents of the Society."

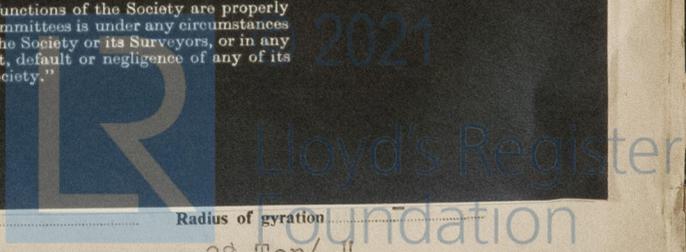

0.0 ✓

Oil or  
argo

separately  
num size



© 2021  
Lloyd's Register  
Foundation

012036-012041-0033

Diameter of flywheel shaft 560mm Material Forged Steel Minimum approved tensile strength 28 Ton/□"  
Flywheel shaft: separate, integral with crankshaft, integral with thrustshaft. (State which) Integral with thrust shaft