

LYS FOR FREEBOARD.—STEAM SHIPS.  $\tilde{N}^{\circ}$  29073.

Port of Survey *Glasgow*  
Date of Survey *while building*  
Name of Surveyor *J. M. Glacuna*

### Particulars of Classification.

100 A.I. Contemplated

9.6

NOTE. — If the depth is measured when vessel is afloat, the details of measurement should be reported.

## Peak Tanks

151. 71

cient as corrected ...

limited as Para. 18 (f)

uncovered .....	✓	Correction
-----------------	---	------------

4.36- ~~4.2~~

ance for Deck Erections .....

responding percentage { 32.48  
(Para. 11, 12, 13, or 14) { 32 2

Winter North Atlantic Line

One-eighth of the vessel's length from stem and stern-post.

if 100ms length covered divide by 2

1. 151 ✓

Proportion of Deck uncovered (Para. 19) ..... ~~4.8~~

NOTE. — The round of beam should be reported on the full breadth of vessel at the gunwale.

10.23 - 10.24

Other Corrections (if any)

N. A. Winter Freeboard .....

INTRODUCTION OF THE WORK OF JOHN LOCKE WITH NOTES,

(Iron) Deck: 1' 8" 0 ft

line of keel or to the water line. If measured relatively to water line the vessel's draft at time of survey, and also the usual load draft forward and aft, should be reported. FORM 50

P.T.O.

Do all the Frames extend to the top height in the Poop? ☒ Raised Quarter Deck? *Yes* Br

To what height do the Reverse Frames extend? *Deep frames*

Has the Poop or Raised Quarter Deck an efficient Iron Bulkhead at the fore end? *Yes formed by bridge end*

Give particulars of the means for closing the openings in Bulkhead *no opening*

Is the Poop or Raised Quarter Deck connected with the Bridge House? *Yes* Has the Bridge House an efficient Bulkhead

Give particulars of the means for closing the openings in Bulkhead *no opening*

What is the thickness of the Bridge Front plating? *24* and Coaming plate? *28*

Give scantlings and spacing of the Stiffeners *5 x 2 1/2 x 4 bulk angles spaced 30" apart.*

Are bracket plates fitted at each end of the Stiffeners? *Yes* Are hor'l. brackets fitted connecting Bridge Bulk'd. with Bulwarks? *Rail has run of 2 bulwarks*

Has the Bridge House an efficient Iron Bulkhead at the after end? *Yes*

How are the openings closed? *Hinged doors*

Is the Forecastle at least as high as the main or top-gallant rail? *Yes* Has the Forecastle an efficient Iron or Wood Bulk'd. at after end? *Open*

Are the Engine and Boiler openings covered by a Bridge, Poop, Raised Quarter Deck, or enclosed by a Strong Iron or Steel Deckhouse? *Covered by raised quarter deck, with strong steel casing above*

If the openings are not so protected are the exposed parts of the Casings efficiently constructed? ☒

Give thickness of plating; scantlings and spacing of Stiffeners ☒

What is the height of the exposed Casings? ☒ Are suitable means provided for closing all openings in them in bad weather? *Yes*

Are the Weather Deck Hatchways efficiently constructed and at least equal to the requirements of Section 28 of the Rules for 1904-5? Give particulars below:— *Yes*

Position and Size.		No 1 for 8-6 x 6-6		18-9 x 9-0		2-2					
Item.		Ship.	Rule.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.
COAMING.	Height above top of DECK	3'-0 1/2"	2-6	3'-7"	2-6						
	Sides.....	.44	.36	.44	.44						
	Ends.....	.40	.36	.40	.40						
SHIFTING BEAMS OR WEB PLATES.	Number .....			2	1						
	Section and Scantlings.....	None	None	22 L x 4	30 x 4						
	Material.....			angle	Steel						
FORE AND AFTERS.	Number.....	1	1	1	1						
	Section and Scantlings.....	8 x 7	8 x 7	7 x 7	7 x 7						
	Material.....	Pitch pine		Pitch pine							
HATCHES Thickness .....		2 1/2	2 1/2	2 1/2	2 1/2						
Remarks.....											

\* When the Fore and Afters are of wood the depth should be stated from the underside of the hatches.  
 (If the sill of the lowest side scuttle will be less than 6 inches above the Indian Summer Load Line if assigned under the tables, state vertical distance from top of deck at side amidships to lower edge of lowest side scuttle.)

The following information is to be given in all Cases of vessels dealt with under Paras. 11, 12 (under 15 feet Moulded depth) and under Shelter Deck Rules.  
 What is the thickness of the Bridge Sheerstrake? ☒ Strake between Main and Bridge Sheerstrakes? ☒


Delete the words { The Crew ~~are~~, are not, berthed in the bridge house.  
 that do not apply { The arrangements to enable them to get backwards and forwards from their quarters are, are not satisfactory. ☒

Length of Bulwarks in well *46-1*

Area of Freeing Ports required by Para. 11 (e) each side of vessel = *11-7* Sq. ft.

Ft.	Tenths.	x	Ft.	Tenths.	x	No.	} Freeing Ports (each side of vessel) = <i>10-98</i> ✓ Sq. ft. <i>Para 14 can</i>
2-44		x	1-5		x	3	
		x			x		

Total deficiency or excess = *-12* Sq. ft.

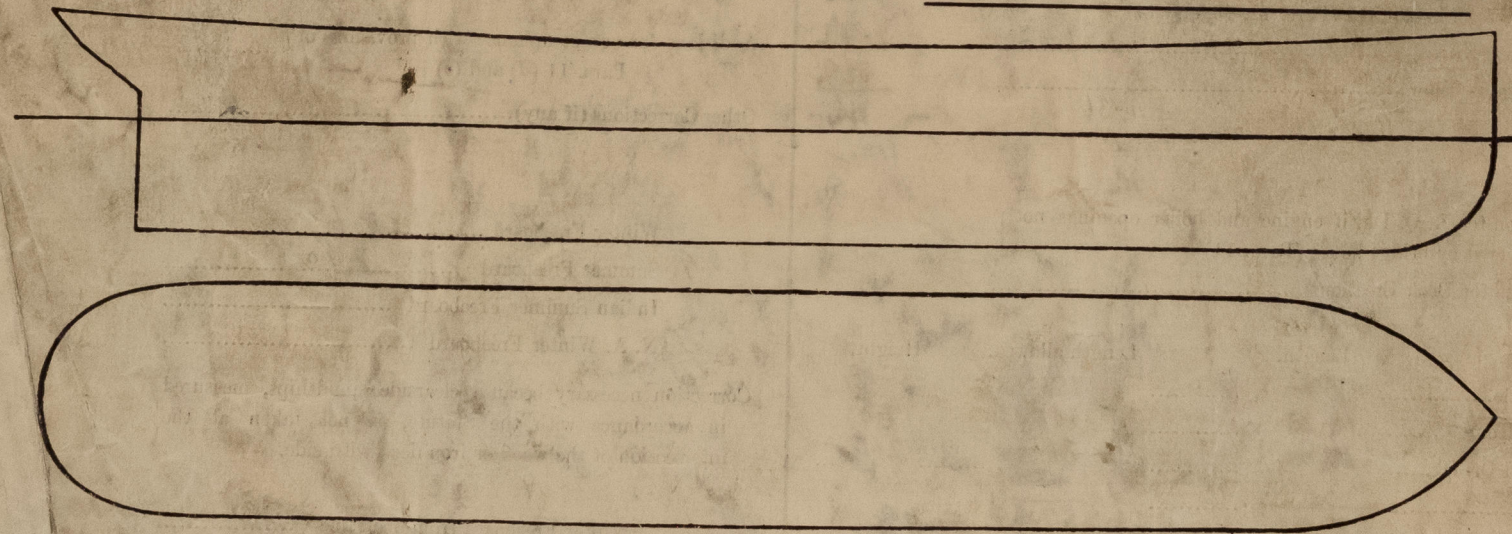

Show hereon line of Floors or Tank Top with position of any Breaks in same; also height of Peak Tank tops, &c., &c.

State any special features in the construction of the Vessel

*The Builders are sending the request from direct.*  
*The approved mid sec and profile are forwarded.*

Owners  
 Address

Fee £ Received by me