

19 FEB 1960

pt. 4b

15.2.60. Received London HELSINGFORS No. 7263  
In shops 78 Port 9.10.58 Last date 29.9.59  
No. of visits On vessel First date Last date

Vasa Vasa No. of visits On vessel First date Last date

19598 Name "LENINGRAD" Gross tons 9425,2  
U.S.S.R. Managers Wärtsilä-koncernen Ab, Sandvikens Skeppsdocka. Port of Registry Murmansk  
Helsingfors By Wärtsilä-koncernen Ab, Wasa Mekaniska Verkstad. Yard No. 366 Year Month 1961-11  
Vasa By Wasa Mekaniska Verkstad. Eng. No. 184 When 1959

Particulars of restricted service of ship, if limited for classification  
Particulars of vegetable or similar cargo oil notation, if required  
Is ship intended to carry petroleum in bulk?  
Type of refrigerant

Following particulars should be given as fully and as clearly as possible. Where the answer is "No" or "None", say so! Ticks and other signs of doubtful meaning are not to be used.

Ships of main engines No. of propellers Brief description of propulsion system Diesel Electric  
MAIN RECIPROCATING ENGINES. Licence Name and Type No. Wärtsilä-Sulzer 9 MH 51/55  
No. of cylinders per engine 9 Dia. of cylinders 510 mm stroke(s) 550 mm 2 or 4 stroke cycle 2 Single or double acting single  
Maximum approved BHP per engine 3250 at 330 RPM of engine and RPM of propeller.  
Corresponding MIP 5,3 kg/cm<sup>2</sup> (For DA engines give MIP top & bottom) Maximum cylinder pressure 65 kg/cm<sup>2</sup> Machinery numeral

Are the cylinders arranged in Vee or other special formation? no If so, number of crankshafts per engine -  
TWO STROKE ENGINES. Is the engine of opposed piston type? no If so, how are upper pistons connected to crankshaft? -  
The exhaust discharged through ports in the cylinders or through valve(s) in the cylinder covers? ports in cyl. No. and type of mechanically driven scavenge pumps or blowers per engine and how driven 0 lever driven scavenge pumps (piston pumps)  
No. of exhaust gas driven scavenge blowers per engine - Where exhaust gas driven blowers only are fitted, can the engine operate with one blower out of action?  
Is a stand-by or emergency pump or blower is fitted, state how driven No. of scavenge air coolers Scavenge air pressure at full


THREE STROKE ENGINES. Is the engine supercharged? Are the undersides of the pistons arranged as supercharge pumps? No. of exhaust gas driven blowers per engine  
No. of supercharge air coolers per engine Supercharge air pressure Can engine operate without supercharger?  
TWO & FOUR STROKE ENGINES--GENERAL. No. of valves per cylinder: Fuel 1 Inlet - Exhaust - Starting 1 Safety 1  
Material of cylinder covers Cast steel Material of piston crowns Forged steel Is the engine equipped to operate on heavy fuel oil? no  
Cooling medium for: Cylinders Fresh water Pistons oil Fuel valves fresh water Overall diameter of piston rod for double acting engines -

Is the rod fitted with a sleeve? no Is welded construction employed for: Bedplate? no Frames? no Entablature? no Is the crankcase separated from the underside of pistons? no Is the engine of crosshead or trunk piston type? Trunk Total internal volume of crankcase 8,5 m<sup>3</sup> No. and total area of explosion relief devices 9 x 250 cm<sup>2</sup> = 2250 cm<sup>2</sup> Are flame guards or traps fitted to relief devices? no Is the crankcase readily accessible? yes If not, must the engine be removed for overhaul of bearings, etc? - Is the engine secured directly to the tank top or to a built-up seating? How is the engine started? by air  
Can the engine be directly reversed? no If not, how is reversing obtained? no reversing required.  
Has the engine been tested working in the shop? yes How long at full power? 8 hours

TANK & FLYWHEEL SHAFTING. Date of approval of torsional vibration characteristics of the propelling machinery system 16.4.57 State barred speed range(s), if imposed 23.4.57  
Working propeller For spare propeller Is a governor fitted? yes Is a torsional vibration damper or detuner fitted to the shafting? no  
Where positioned? Type No. of main bearings 11 Are main bearings of ball or roller  
Distance between inner edges of bearings in way of crank(s) 570 mm Distance between centre lines of side cranks or eccentrics of opposed piston engines -  
Crankshaft type: Built, semi-built, solid. (State which) solid  
Diameter of journals 310 mm Diameter of crankpins 120 mm Dia Hole Breadth of webs at mid-throw 450 mm Axial thickness of webs 163 mm  
Unshrunk, radial thickness around eyeholes Are dowel pins fitted? Crankshaft material Journals Approved 50 kg/mm<sup>2</sup>  
Webs Tensile strength

Diameter of flywheel Weight Are balance weights fitted? Total weight Radius of gyration  
Diameter of flywheel shaft Material Minimum approved tensile strength  
Flywheel shaft: separate, integral with crankshaft, integral with thrustshaft. (State which) Integral with crankshaft

012705-012710-0100 1/2

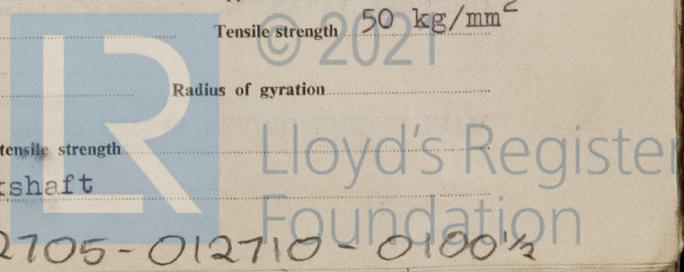



GENERAL REMARKS

State if the machinery has been constructed and/or installed under special survey in accordance with the Rules, approved plans and Secretary's letters. State quality of materials and workmanship and recommendations for classification, including any special notation to be assigned. Where existing machinery is submitted for classification the circumstances should be explained as fully as possible.

This Diesel Engine has been constructed under Special Survey in accordance with the Rules, approved plans and Secretary's letters. Quality of materials and workmanship found good.

*J. W. ...*  
 Engineer Surveyor to Lloyd's Register of Ships

PARTICULARS OF IDENTIFICATION MARKS (Including Port of origin) of important Forgings and Castings. (Copies of certificates should be forwarded with report.)

RODS Lloyd's DSF HS 120 4.9.58 (3 pice) Lloyd's DSF HS 117 4.9.58(6 pice)

CRANKSHAFT OR ROTORSHAFT Lloyd's KLN AS 942 25.8.58 Lloyd's KLN AS 950 25.8.58

FLYWHEEL SHAFT

THRUSTSHAFT

GEARING

INTERMEDIATE SHAFTS

SCREW AND TUBE SHAFTS

PROPELLERS

OTHER IMPORTANT ITEMS

Is the installation a duplicate of a previous case? yes If so, state name of vessel Yard No. 365. Report No. 6968.

Date of approval of plans for crankshaft 6.10.55 Straight shafting \_\_\_\_\_ Gearing \_\_\_\_\_ Clutch \_\_\_\_\_

Separate oil fuel tanks \_\_\_\_\_ Pumping arrangements \_\_\_\_\_ Oil fuel arrangements \_\_\_\_\_

Cargo oil pumping arrangements \_\_\_\_\_ Air receivers \_\_\_\_\_ Donkey boilers \_\_\_\_\_

Dates of examination of principal parts:—

Fitting of stern tube \_\_\_\_\_ Fitting of propeller \_\_\_\_\_ Completion of sea connections \_\_\_\_\_ Alignment of crankshaft in main bearings \_\_\_\_\_

Engine chocks & bolts \_\_\_\_\_ Alignment of gearing \_\_\_\_\_ Alignment of straight shafting \_\_\_\_\_ Testing of pumping arrangements \_\_\_\_\_

Oil fuel lines \_\_\_\_\_ Donkey boiler supports \_\_\_\_\_ Steering machinery \_\_\_\_\_ Windlass \_\_\_\_\_

Date of Committee FRIDAY 16 FEB 1962 Special Survey Fee Fmk. 267.000

Decision Su Hf 8382

Expenses Fmk. 8.480

Date when A/c rendered 20.10.59.



Lloyd's Register Foundation