

REPORT ON ELECTRIC FITTINGS.

(OTHER THAN FOR THE PROPULSION OF THE VESSEL)

Received at London Office

21 Apr 1925

Date of writing Report 22. 4. 1925 When handed in at Local Office 19 Port of Rotterdam

No. in Survey held at Rotterdam Date, First Survey 20. 2. 25 Last Survey 6 - 4 - 19 25
Reg. Book. (Number of Visits.....)

on the *Steel Twin Screw Steamer MARIANA* Tons { Gross 2682
Net 1473

Built at Rotterdam By whom built *Rotterdamse Droogdok* Yard No. 96 When built 1925

Owners *Caracourche Scheep Ma* Port belonging to *Wollemstad*

Electric Light Installation fitted by *Groenewold & Co. Rob.* Contract No. When fitted 1925

System of Distribution *Two wire system.*

Pressure of supply for Lighting 110 V. volts, Heating _____ volts, Power 110 volts.

Direct or Alternating Current, Lighting *Direct current* Power *Direct current.*

If alternating current system, state frequency of periods per second _____

Has the Automatic Governor been tested and found efficient when the whole load is suddenly thrown on or off *yes.*

Generators, do they comply with the requirements regarding overload *yes.*, are they compound wound *yes.*

are they over compounded 5 per cent. *yes.*, if not compound wound state distance between each generator _____

Where more than one generator is fitted are they arranged to run in parallel _____, is an adjustable regulating resistance fitted in series with each shunt field _____

Are all terminals accessible and clearly marked *yes.*, are they so spaced or shielded that they cannot be accidentally earthed, or short circuited *yes.*

Are the lubricating arrangements of the generators as per Rule *yes.*

Position of Generators *placed with its axis of rotation in fore and aft direction in engine room*

is the ventilation in way of the generators satisfactory *yes.*, are they clear of all inflammable material *yes.*

if situated near unprotected woodwork or other combustible material, state distance of same horizontally from or vertically above the generators *horizontally 12" and vertically 4"*

are the generators protected from mechanical injury and damage from water, steam or oil *yes.*

are their axis of rotation fore and aft *yes.*

Earthing, are the bedplates and frames of the generating plant efficiently earthed *yes.* are the prime movers and their respective generators in metallic contact *yes.*

Main Switch Boards, where placed *in engine room*

If the generators and main switchboard are not placed in the same compartment, is each generator provided with a fuse on each insulated pole as near as possible to the terminals of the generator, additional to that provided on the main switchboard _____

Switchboards, are they placed in accessible positions, free from inflammable gases and acid fumes *yes.*

are they protected from mechanical injury and damage from water, steam or oil *yes.*, if situated near unprotected woodwork or other combustible material, state distance of same horizontally from or vertically above the switchboards *12 inches and 4 feet.*

are they constructed wholly of durable, incombustible non-absorbent materials *yes.*, is all insulation of high dielectric strength and of permanently high insulation resistance *yes.*

if semi-insulating material is used, are all conducting parts connected to one pole insulated from the slab with mica or micanite and the slab similarly insulated from its framework *yes.*

and is the frame effectively earthed *yes.* Are the following fittings as per Rule, viz.:— spacing or shielding of live parts *yes.*

accessibility of all parts *yes.*, absence of fuses on back of board *yes.*, proportion of omnibus bars *yes.*

individual fuses to voltmeter, pilot or earth lamp *yes.*, connections of switches *yes.*

Main Switchgear, description of switchgear for each generator and each outgoing circuit, and arrangement of equalizer switches *for the generator double pole fuse and double link switch, and for every outgoing circuit also a double pole fuse and link switch.*


Instruments on main switchboard 1 periodic ammeters 1 periodic voltmeters _____ synchronising device for paralleling purposes.

Earth Testing, state what means are provided at the main switchboard for indicating the state of the insulation of the system *3 earth lamps.*

indicating lamps.

Switches, Circuit Breakers and Fusible Cut-outs, do these comply with the requirements of the Rules *yes.*

Section and Distribution Boards, is the construction, protection, insulation, material, and position of these as per rule *yes.*

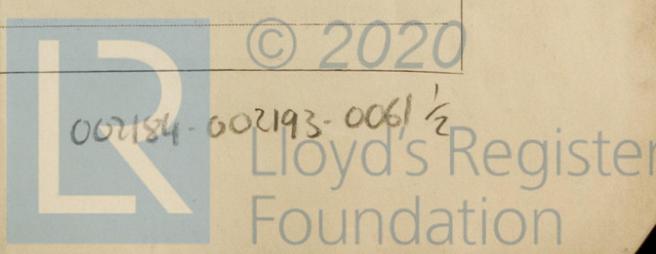

single and twin
Insulation of Cables, state type of cables, single or twin *yes* are the cables insulated and protected as per Tables III or IV of the Rules *yes*
Fall of Pressure, state maximum between bus bars and any point of the installation under maximum load *2 Volt + 5%*
Cable Sockets and other connections, are the ends of all cables having a sectional area of 0.007 square inch and above provided with soldering sockets *yes*
Paper Insulated Cables. If cables are paper covered, is the dielectric at the exposed ends of the conductor protected from moisture by being suitably sealed with insulating compound _____
Cable Runs, are the cables fixed as far as possible in accessible positions not exposed to drip or accumulation of water or oil, or to high temperature from boilers, steam pipes, uptakes or other hot objects, or to avoidable risk of mechanical damage *yes*
Support and Protection of Cables, state how the cables are supported and protected *The cables are supported by brass clips for the lead cables, and supported by galvanized iron clips for armoured lead cables*
 If cables are run in wood casings, are the casings and caps secured by screws _____, are the cap screws of brass *yes*, are the cables run in separate grooves _____ If armoured and lead covered cables are secured by metal clips, are the clips spaced as per Table VI *yes*
Refrigerated Chambers, if lights are fitted, are the cables and fittings in accordance with the special requirements *yes*
Joints in Cables, state if any, and how made, insulated, and protected *no joints are made*
Watertight Glands and Deck Tubes, are all cables passing through decks and watertight bulkheads provided with deck tubes or watertight glands *yes*
Bushes in Beams and Non-watertight Positions, where unarmoured cables pass through beams and non-watertight partitions, are the holes efficiently bushed *yes* state the material of which the bushes are made *of wood*
Earthing Connections, state what earthing connections are fitted and their respective sectional areas _____, are their connections made as per Rule _____
Alternative Lighting, are the groups of lights in the propelling machinery space arranged as per Rule *yes*
Emergency Supply, state position and method of control of the emergency supply and how the generator is driven _____
Navigation Lamps, are these separately wired *yes*, controlled by separate switch and separate fuses *yes*, are the fuses double pole *yes*, are the switches and fuses grouped in a position accessible only to the officers on watch *yes*, has each navigation lamp an automatic indicator as per Rule *yes*, are separate screens provided for the use of oil and electric side lights *yes*, are separate oil lanterns provided for the mast head lights and side lights *yes*
Fittings, are all fittings on weather decks, in stokeholds and engine rooms and wherever exposed to drip or condensed moisture, watertight *yes*, are any fittings placed in spaces in which goods are liable to be stacked in close proximity to them; if so, how are they protected *no fittings in such places are made*, are any fittings placed in spaces where inflammable or explosive dust or gases are liable to be present, if so, how are they protected *yes in top of pump room they are separated from the interior by an airtight glass on outside of pump room*, where are the controlling switches situated *on outside of pump room*
Searchlight Lamps, No. of _____, whether fixed or portable _____, are their fittings as per Rule _____
Arc Lamps, other than searchlight lamps, No. of _____, are their live parts insulated from the frame or case _____, are their fittings as per Rule _____
Motors, are their working parts readily accessible *yes*, are the coils self-contained and readily removable for replacement *yes*, are the brushes, brush holders, terminals and lubricating arrangements as per Rule *yes*, are the motors placed in well-ventilated compartments in which inflammable gases cannot accumulate and clear of all inflammable material *yes*, are they protected from mechanical injury and damage from water, steam or oil *yes* are their axis of rotation fore and aft *yes*, if situated near unprotected woodwork or other combustible material, are the motors of the totally enclosed, pipe ventilated, forced draught, drip or flame proof type *yes*, if not of this type, state distance of the combustible material horizontally or vertically above the motors *yes* and *yes*
Control Gear and Resistances, are the generator field and motor speed regulators, starters and controllers constructed as per Rule _____
Lightning Conductors, where lightning conductors are required, are these fitted as per Rule *yes*
Ships carrying Oil having a Flash Point less than 150° F. Have the special requirements of the Rules been complied with regarding switches, joint boxes, section and distribution boards, protection of cables, method of distribution, lead of cables, lights and fittings *yes*
 If portable lamps for use in dangerous spaces are supplied, are they of a type approved by the Home Office *yes*

PARTICULARS OF GENERATING PLANT.

DESCRIPTION OF GENERATOR.	No. of	RATED AT				DRIVEN BY.	WHERE DRIVEN BY AN INTERNAL COMBUSTION ENGINE.	
		Kilowatts.	Volts.	Ampères.	Revs. per Min.		Fuel Used.	Flash Point of Fuel.
MAIN	8	110			375	Steam engine.		
AUXILIARY								
EMERGENCY								
ROTARY TRANSFORMER								

LIGHTING AND HEATING CONDUCTORS.

Ref. No.	DESCRIPTION.	No. of Conductors.	Effective Area of each Conductor. Sq. Ins.	COMPOSITION OF STRAND.		Total Maximum Current. Amperes.	Approximate Length. (Lead and Return.) Feet.	Insulated with	HOW PROTECTED.
				No.	Diameter.				
	MAIN GENERATOR...	19/16	.060	320		75	8		
	AUXILIARY GENERATOR								
	EMERGENCY GENERATOR								
	ROTARY TRANSFORMER...								
	AUXILIARY SWITCHBOARDS								
	ENGINE ROOM								
	BOILER ROOM								
	WIRELESS	7/17	.0170	168		20	150		
	SEARCHLIGHT								
	MASTHEAD LIGHT...	1/7	.00246			0.3	60		
	SIDE LIGHTS...	1/7	.00246			0.3	55		
	COMPASS LIGHTS...	1/7	.00246			0.3	50		
	POOP LIGHTS								
	CARGO LIGHTS	1/7	.00246			1	120		
	ARC LAMPS								
	HEATERS								

MOTOR CONDUCTORS.

Ref. No.	DESCRIPTION.	No. of Motors.	Effective Area of each Conductor. Sq. Ins.	COMPOSITION OF STRAND.		Total Maximum Current. Amperes.	Approximate Length. (Lead and Return.) Feet.	Insulated with	HOW PROTECTED.
				No.	Diameter.				
	BALLAST PUMP								
	MAIN BILGE LINE PUMPS								
	GENERAL SERVICE PUMP								
	EMERGENCY BILGE PUMP								
	SANITARY PUMP								
	CIRC. SEA WATER PUMPS								
	CIRC. FRESH WATER PUMPS								
	AIR COMPRESSOR								
	FRESH WATER PUMP								
	ENGINE TURNING GEAR								
	ENGINE REVERSING GEAR								
	LUBRICATING OIL PUMPS								
	OIL FUEL TRANSFER PUMP								
	WINDLASS								
	WINCHES, FORWARD								
	WINCHES, AFT								
	STEERING GEAR								
	WORKSHOP MOTOR								
	VENTILATING FANS								



All Conductors are of annealed copper conforming to British Standard Specification No. 7.

The Insulated Conductors are guaranteed to withstand the immersion and resistance tests specified in the Rules.

The foregoing is a correct description.

GROENEVELD, VAN DER POLL & Co's
Electrotechnische Fabriek

Electrical Engineers.

Date 24. 4. 25

per proc. *[Signature]*

COMPASSES.

Distance between electric generators or motors and standard compass

110 feet

Distance between electric generators or motors and steering compass

105 feet

The nearest cables to the compasses are as follows:—

A cable carrying 0.3 Amperes 10 feet from standard compass 12 feet from steering compass.

A cable carrying Amperes feet from standard compass feet from steering compass.

A cable carrying Amperes feet from standard compass feet from steering compass.

Have the compasses been adjusted with and without the electric installation at work at full power Yes

Has the effect of switching on and off circuits, motors and other electro-magnetic apparatus within the vicinity of the compasses been noted Yes

The maximum deviation due to electric currents was found to be nil degrees on every course in the case of the standard

compass, and nil degrees on every course in the case of the steering compass.

[Signature]
Builder's Signature.

Date 25. 4. 25

Is this installation a duplicate of a previous case - If so, state name of vessel

General Remarks (State quality of workmanship, opinions as to class, &c. This installation has been fitted in accordance with the Rules, was found in a good working condition when tried and merits in my opinion the Committee's approval

It is submitted that this vessel is eligible for THE RECORD. Elec. light.

[Signature]
27/4/25

Total Capacity of Generators 8 Kilowatts

The amount of Fee ... £ 96.00
Travelling Expenses (if any) £ : :
When applied for, 1925
When received, 1925

[Signature]
Superintendent to Lloyd's Register of Shipping.

Committee's Minute FRI. 1 MAY 1925

Assigned

Im. 9. 22.—Transfer. (The Sureties are requested not to write on or below the space for Committee's Minute.)



© 2020

Lloyd's Register Foundation