


LLOYD'S REGISTER OF SHIPPING

Index No.
(For London Office only.)

SURVEYS FOR FREEBOARD

(CONDITIONS OF ASSIGNMENT)

Ship's Name **"ABO EGELA"** Port of Survey **TRIESTE (Surveyed at Budapest)**
Gheorghiu Dej Shipyard-Budapest Yard N°. 1917
 Official Number Surveyor's Signature *A. Parodi* **(A. Parodi)**
 Nationality and Port of Registry **United Arab Republic-Alexandria** Date of Survey **May, 1962** **in**

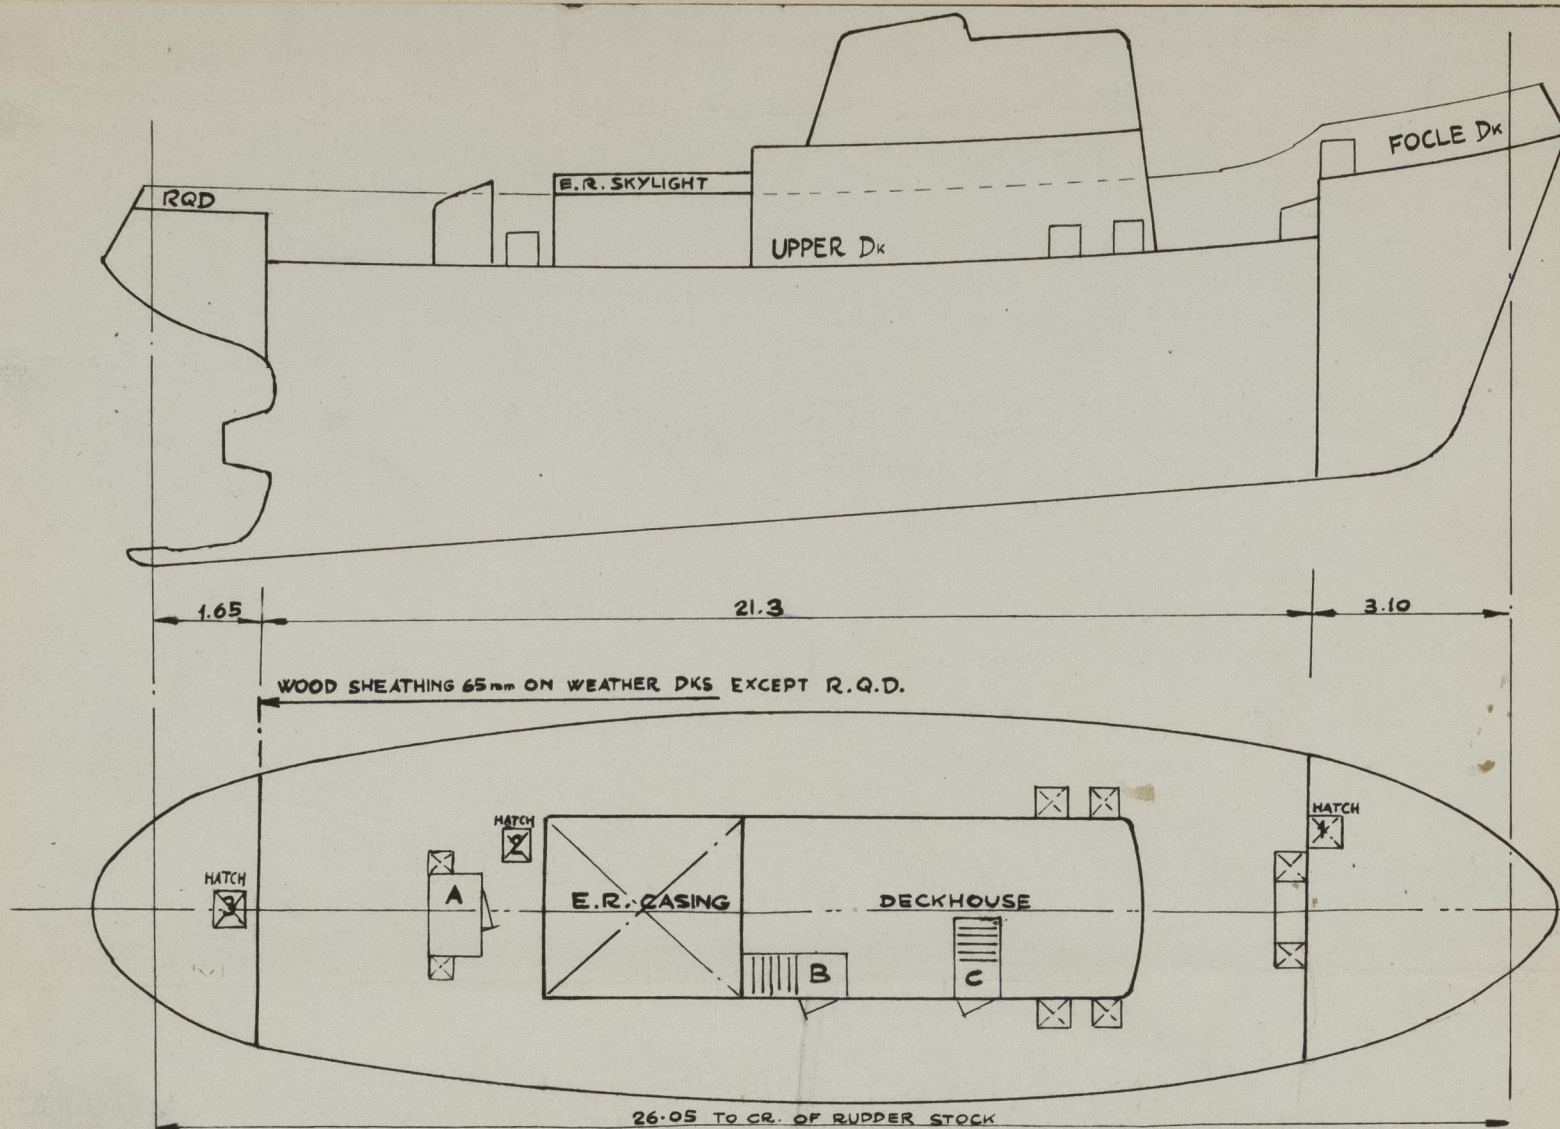

Particulars of Superstructures, Trunks, Casings, Deckhouses.

	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height, Beam to Beam
Poop Bulkhead								
Raised Quarter Deck Bulkhead ...		7	75x100x9 T	700	Welded	None		400
Bridge, After Bulkhead								
Bridge, Forward Bulkhead								
Forecastle Bulkhead		7	75x100x9 T	575	Welded	None		600
Trunk, Aft								
Trunk, Forward								
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	None	7	T 40x60x6	533	Welded Top free at Bottom	None		915
Exposed Machinery Casings on Superstructure Decks					Arrangements as per approved plans			
Machinery Casings within Superstructures not fitted with Class I Closing Appliances								
Deckhouses and Pump Room Entrances		6	T 40x60x6	533	Bkts. Tab	1400x670	610	2300

Particulars of Closing Appliances (state if capable of being manipulated from both sides).

Poop Bulkhead	
Raised Quarter Deck Bulkhead ...	None Opening
Bridge, After Bulkhead	
Bridge, Forward Bulkhead	
Forecastle Bulkhead	None Opening
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	None Opening
Exposed Machinery Casings on Superstructure Decks	
Machinery Casings within Superstructures not fitted with Class I Closing Appliances	
Deckhouses and Pump Room Entrances	W.T. hinged steel doors operated both sides

Abu Egela

Particulars of Galley Cargo and Coaling Ports :-

Particulars of Scuppers and Sanitary Discharge Pipes :-

- Upper deck drained by 4 scuppers p. & s., 54mm. dia., discharging overboard immediately below upper deck wood fender.
- One sanitary disch. from WCs above U.deck discharging overboard through steel a.n.r.v. in access.pos.in (E.R.)
- Washbasins and showers in dekhous discharging overboard through one steel SDNR p. & s.in accessible position in E.R.
- Washbasins below upper deck discharge into a small tank below floor of crew accommodation; this tank is discharged overboard through manual pump and steel s.d.n.r.v. in accessible position in E.R.
- Store above fore peak tank and chain locker drains into bilge hat, discharged overboard through hand pump and steel s.d.n.r.v. on shell; same applies to accomm. space above after peak tank and steering gear space.

Particulars of Side Scuttles and Deadlights :- None on shell

Vertical distance of Sill of lowest Side Scuttle above top of keel
Distance from amidships to centre of lowest Side Scuttle

Particulars of Guard Rails and Bulwarks :-

950 mm. high, 7mm. thick, handrail x 70x8, stiffened by flanged plate stanchions 250x5 fl. 40 spaced 1070mm.- Efficient stiffening in way of fairleads.

Particulars of Gangways, Lifelines, etc. :- None



Particulars of Freeing Arrangements.

	Length of Bulwark	Height of Bulwark	Size of Freeing Ports	Number each side	Area each side	Rule area each side
After Well	Fitted all fore and aft	950	745 x 445	4	1.38 m ²	
Forward Well						

State position of each freeing port ... { After Well :-
(F. and A. position and height above deck edge) { Forward Well :- Height above deck of opening = 100 mm.

State whether the freeing ports are fitted with shutters, bars, or rails, and give particulars of such :-

Additional area where sheer is less than standard.

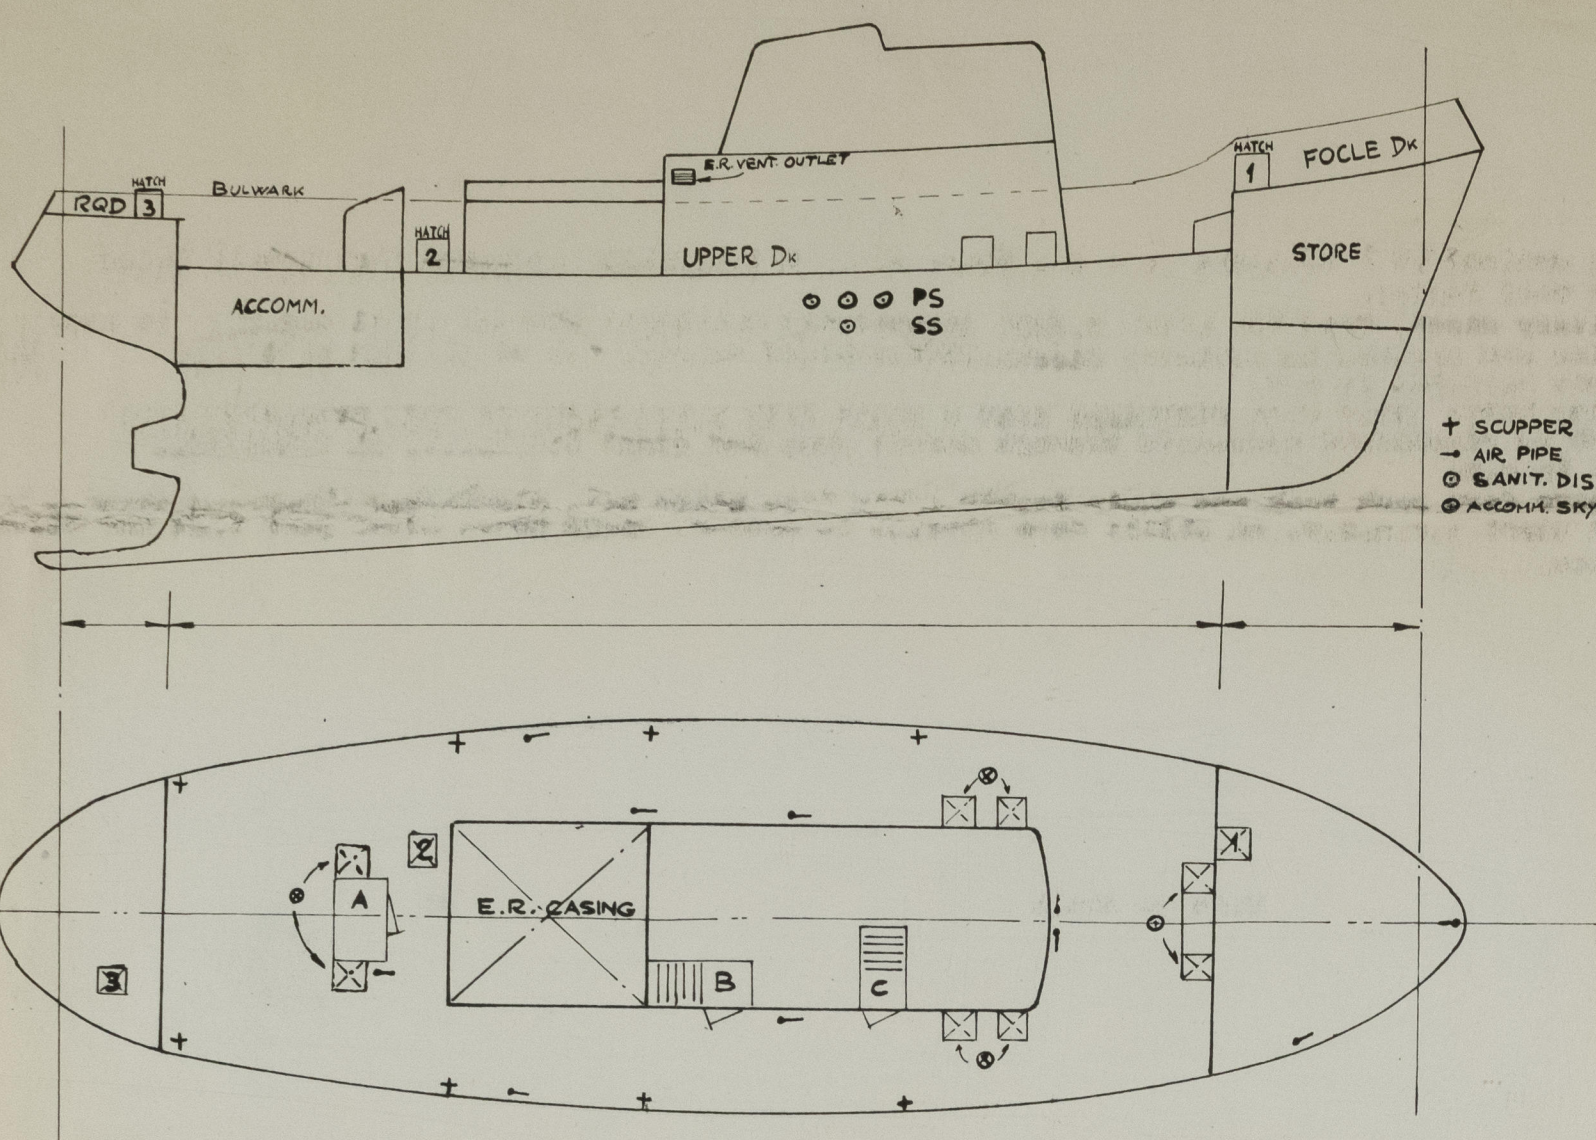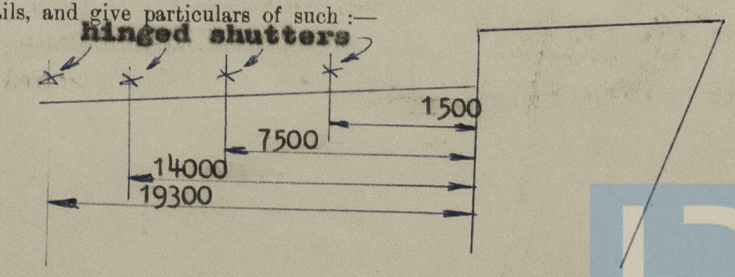

Particulars of fiddle, funnel and ventilator coamings, engine room skylight and other openings in machinery casing tops and their means of closing :-

- E.R. skylight and vent coamings strongly constructed of steel
- Skylight fitted with six hinged steel flaps with strong bullseye lights
- Funnel strongly constructed of aluminium alloy
- Eight small skylights on deck to accomm., strongly constructed of steel with hinged steel cover fitted with strong bullseye, dia. 200 of substantial thickness

Particulars of Flush Bunker Scuttles :- None fitted.

Particulars of Companionways :-
(including those incorporated in dekhouses and masthouses)

- A). Strong steel companionway on upper deck, hinged W.T. steel door operated both sides 825x580 sill 610 (to accomm. aft)
- B). Companionway enclosed in strong steel dekhous on upper deck, hinged W.T. steel door operated both sides, 1400x670 sill 610 (to engine room)
- C). Companionway enclosed in strong steel dekhous on upper deck, hinged W.T. steel door operated both sides, 1400x670 sill 610 (to accomm. forwd.)

Particulars of Ventilators in exposed positions on freeboard and superstructure decks :-

- Mechanical ventilation to engine room, outlet fitted in dekhous side bulkhead, 1700mm. above deck - Fan inside house. Outlet fitted with hinged steel cover.
- All accomm. spaces and stores amidships ventilated with 100 dia. torpedo vents fitted on dekhous sides, not less than 1800 above deck.

Particulars of Air Pipes in exposed positions on freeboard, raised quarter, or superstructure decks :-

- Air pipes:-
- 7 on upper deck - dia. 76, 915 high
- 2 on focle " - " 76, 915 "
- 1 on midship dekhous - dia. 76, 460 high

All fitted with wire gauze and patent ball valve.

PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS.									
			1	2	3				
Description of Hatchway			To F.P. Store	To Eng? Room	To steering Gear				
Dimensions of Hatchway			620x370	600x450	850x710				
COAMINGS	{	Height above Deck ...	710	710	610				
		Thickness { Sides ...	9	9	9				
		{ Ends ...	None	None	None				
		Stiffeners ... { Sides ...							
		Brackets, Stays { Ends ...	X	✓	X				
HATCH BEAMS	{	Number							
		Spacing							
		Scantling and Sketch ...							
	{	Bearing Surface							
FORE AND AFTERS	{	Number							
		Spacing							
		Unsupported Lengths ...							
		Scantling* and Sketch ...							
	{	Bearing Surface							
HATCH COVERS	{	Material	Steel	Steel	Steel				
		Thickness	6	6	6				
		How fitted	Hinged efficiently						
		Bearing Surface ...	stiffened, rubber packing	As No. 1	As No. 1				
Spacing of xxxx toggles			300	350	500				
Number of Tarpaulins... ..									
*Are wood fore and afters steel shod at all bearing surfaces?									
Are battens and wedges efficient and in good condition?									
Are tarpaulins in good condition and in accordance with rule requirements?									
Are lashings provided in accordance with rule requirements?									
Are wood covers fitted with galvanised end bands?									

Particulars of any special features :— (Timber Deck-cargo Fittings, Skylights, Sewage Systems, Ash Ejectors, Rubbish Shoots, etc.)

Class contemplated +100 A1 "TUG" "Mediterranean Service"



© 2021

Lloyd's Register
Foundation