


Lloyd's Register of Shipping.
SURVEYS FOR FREEBOARD.
(CONDITIONS OF ASSIGNMENT.)

Ship's Name "UNITED ONE" Port of Survey KARACHI
Official Number Surveyor's Signature MacLeod
Nationality and Port of Registry PAKISTANI-CHITTAGONG Date of Survey WHILST BUILDING


Disposition and dimensions of superstructures, trunks, deckhouses and machinery casings to be inserted in the diagrams and tabular statement :—

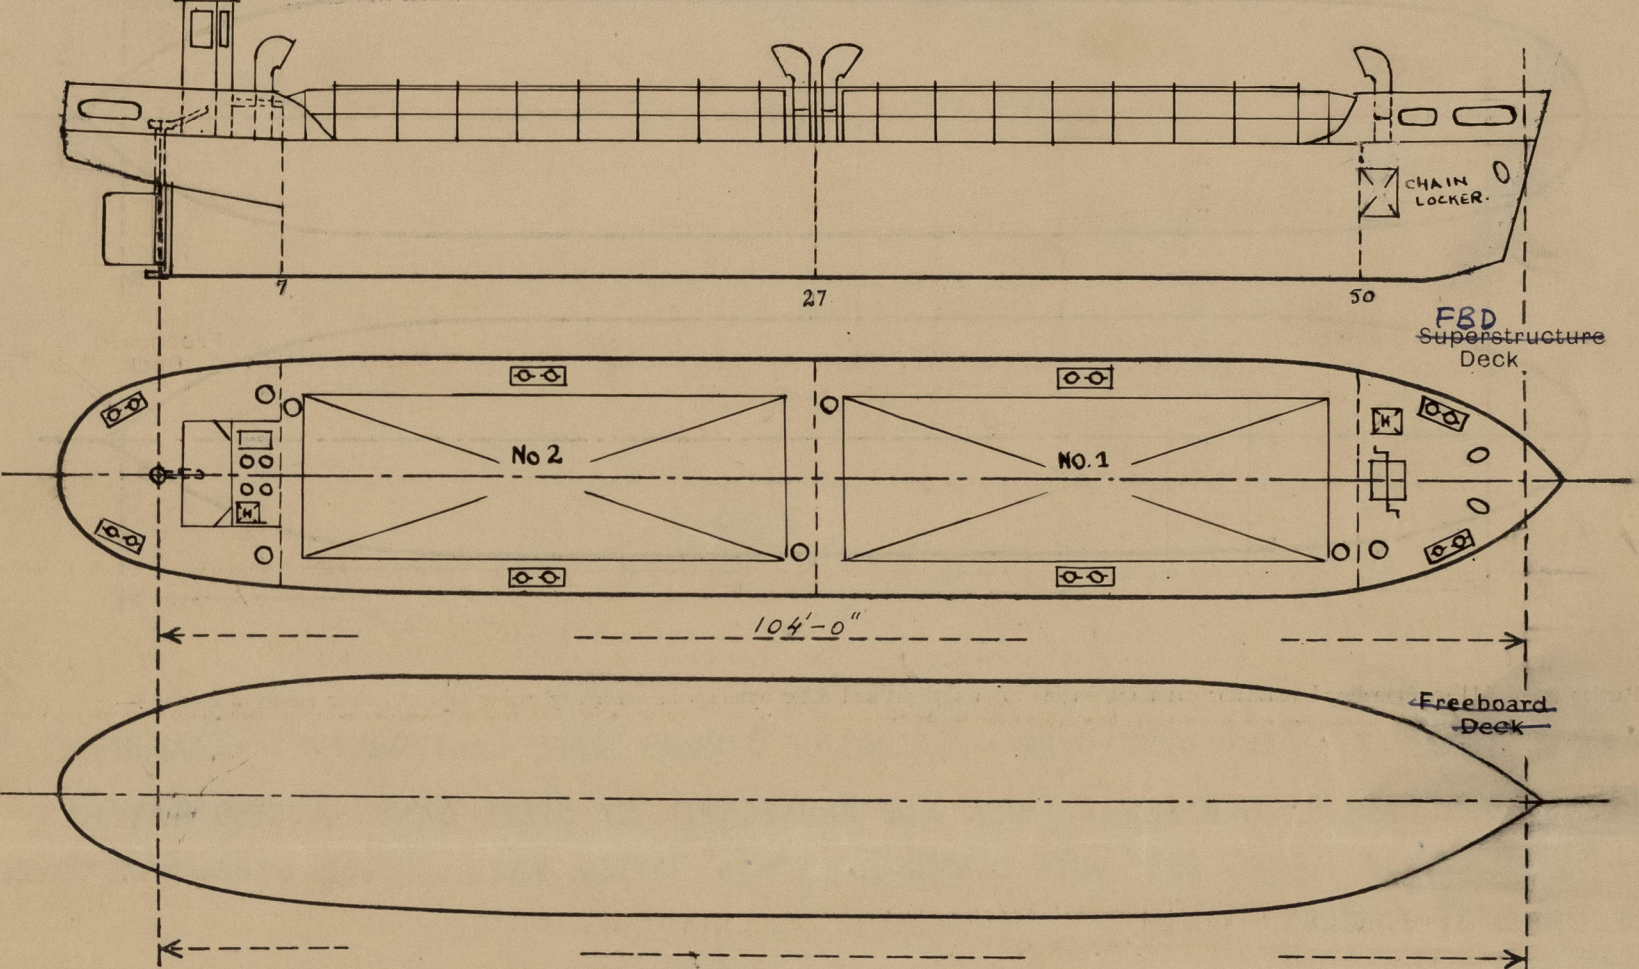

Particulars of Superstructures, Trunks, Casings, Deckhouses.								
	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height of Casings
Poop Bulkhead								
Raised Quarter Deck Bulkhead ...								
Bridge, After Bulkhead								
Bridge, Forward Bulkhead								
Forecastle Bulkhead								
Trunk, Aft								
Trunk, Forward								
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...								
Exposed Machinery Casings on Superstructure Decks								
Machinery Casings within Superstructures not fitted with Class I Closing Appliances								
Deckhouses on Flush Deck Ships ...								
Particulars of Closing Appliances (state if capable of being manipulated from both sides).								
Poop Bulkhead								
Raised Quarter Deck Bulkhead ...								
Bridge, After Bulkhead								
Bridge, Forward Bulkhead								
Forecastle Bulkhead								
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...								
Exposed Machinery Casings on Superstructure Decks								
Machinery Casings within Superstructures not fitted with Class I Closing Appliances								
Deckhouses on Flush Deck Ships ...								

PARTICULARS OF PROTECTION TO OPENINGS, ETC.

The following diagrams should be used to indicate the positions of cargo and coaling hatchways, gangway, cargo and coaling ports, ventilators, companionways, etc., which would affect the seaworthiness of the ship:—

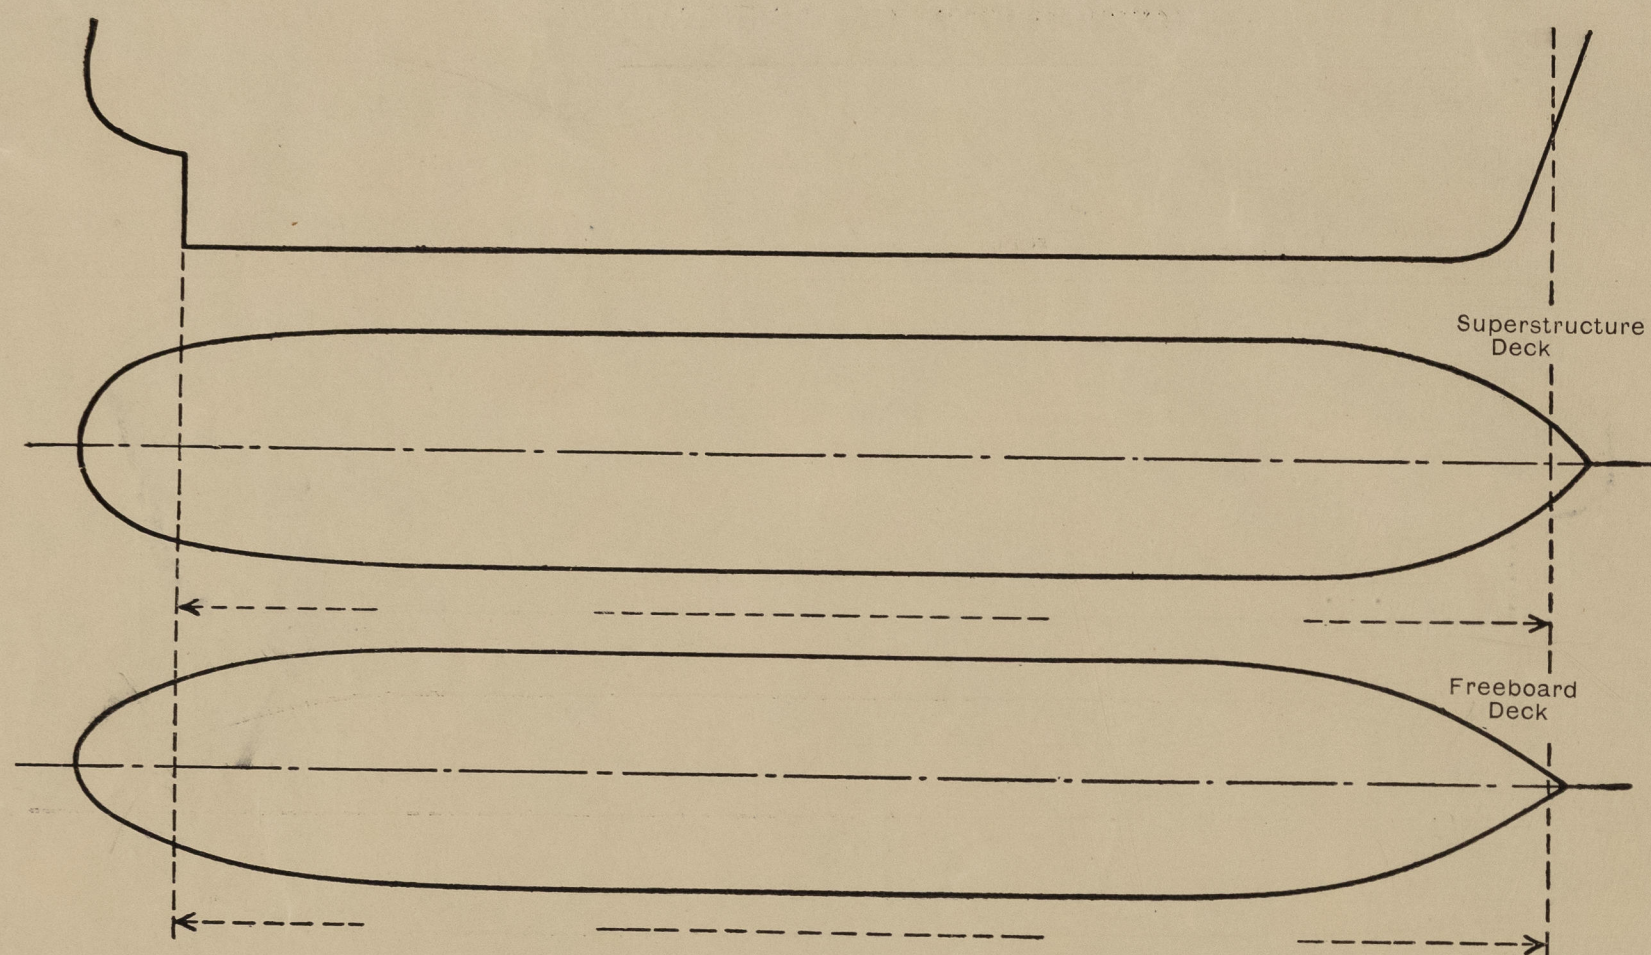

Particulars of fiddle, funnel and ventilator coamings, engine room skylight and other openings in machinery casing tops and their means of closing:—

CREW SPACE AFT:- SKYLIGHT OVER ~ CASING OF STRONG STEEL CONSTRUCTION ~ COAMING 21" x 3/8"
4-FIXED DEADLIGHTS - GLASSES 1" THICK AND PROTECTED BY STEEL BARS. ACCESS HATCHES ~
~ 1 @ 21 1/2" x 21 1/2" & 1 @ 16" x 33 1/2" WITH COAMINGS 2" x 3/8" FITTED WITH HINGED STEEL W.T. COVERS
SECURED BY TOGGLES. ✓

Particulars of Flush Bunker Scuttles:—

NONE

Particulars of Companionways:—

NONE

Particulars of Ventilators in exposed positions on freeboard and superstructure decks:—

7 @ 7 3/4" DIA. x 3/8" x 46 1/2" HIGH COAMINGS SUITABLY SUPPORTED AND SUPPLIED
WITH WOOD PLUGS AND CANVAS COVERS. ✓

Particulars of Air Pipes in exposed positions on freeboard, raised quarter, or superstructure decks:—

NONE

Particulars of Gangway Cargo and Coaling Ports:—

NONE

Particulars of Scuppers and Sanitary Discharge Pipes:—

NONE

Particulars of Side Scuttles:—

NONE

Vertical distance of Sill of lowest Side Scuttle above top of keel:—

Particulars of Guard Rails:—

FITTED (P&S) ABREAST HATCHWAYS - 36" HIGH x 1 1/2" DIA. M.S. PIPE
SPACED 5'-0" APART WITH TWO 1/4" DIA. F.S.W.R. RAILS. ✓

Particulars of Gangways, Lifelines, etc.:—

NONE

Particulars of Freeing Arrangements.

	Length of Bulwark	Height of Bulwark	Size of Freeing Ports	Number each side	Area each side	Rule area each side
Aft Well	22'-0"	30 1/4" x 3/8"	42" x 12"	1	3.3 sf	—
Forward Well	18'-0"	30 1/4" x 3/8"	42" x 12" & 11" x 8"	2	3.7 sf	NOT APPLICABLE

State position of each freeing port { After Well:— 6"
(E and A. position and height above deck edge) { Forward Well:— 6"

State whether the freeing ports are fitted with shutters, bars, or rails, and give particulars of such:— BARS. ✓

OPEN ENDS BETWEEN FORWARD
AND AFT BULWARKS.

Additional area where sheer is less than standard.

PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS.											
Description of Hatchway			N ^o 1	N ^o 2	ACCESS FORWARD						
Dimensions of Hatchway			35'6" x 17'	36' x 17'	1'10" x 1'10"						
COAMINGS	{	Height above Deck ...	33"		6"						
		Thickness { Sides ...	3/8"	D ^o	3/8"						
		Ends ...									
		Stiffeners ...									
		Brackets, Stays ...	6" x 3" x 5/16" O.A.		-						
HATCH BEAMS	{	Number	5	5							
		Spacing	5'-11"	6'-0"							
		Scantling and Sketch ...									
		Bearing Surface ...									
FORE AND AFTERS	{	Number									
		Spacing									
		Unsupported Lengths ...									
		Scantling* and Sketch ...									
		Bearing Surface ...									
HATCH COVERS	{	Material	S.W.		STEEL						
		Thickness	2 1/2"	D ^o	3/8"						
		How fitted	F & A		HINGED						
		Bearing Surface ...	3"		RUBBER						
Spacing of Cleats			24"	D ^o	3						
Number of Tarpaulins			2		TOGGLES						
<p>*Are wood fore and afters steel shod at all bearing surfaces? YES</p> <p>Are battens and wedges efficient and in good condition? YES</p> <p>Are tarpaulins in good condition and in accordance with rule requirements? YES</p> <p>Are lashings provided in accordance with rule requirements? YES</p>											

Particulars of any special features :—



© 2021

Lloyd's Register
Foundation