

Lloyd's Register of Shipping.

Ship's Name "SAN UBALDO"

Official No. 145223

Memorandum of alterations reported since ship was surveyed for assignment of Load Lines in

The openings in the poop front have now been permanently plated over 1"
Poop front "No Openings".


The forecastle end bulkhead has now 2 openings each 4'-0" x 3'-0" height
of sill 18" closed by storm boards in riveted channels and 2 openings each
4'-6" x 2'-6" closed by hinged steel water-tight doors. *manipulated from both sides.*

The hatchway "B" on the poop deck has now been converted into a
companionway of steel construction, closed by strongly constructed hinged wood
doors capable of being operated from both sides. Height of sill 30".

The bulwarks in both wells have now been removed and open rails, 3 rod type,
3'-6" high have been fitted. *Spacing of Stanchions = 5'-0"*

A copy of the above has been placed aboard the vessel.

Alfred J. S. Heffer

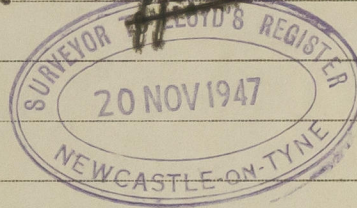

*Noted.
LSP
24 NOV 1947*