

Total 7577.58
Gross Tonnage 8737.64
Register Tonnage 4983.71

REGISTERED DIMENSIONS.
FEET

Length 472.6
Breadth 62.0
Depth 33.65

Breadth (greatest moulded) B 61.75
Depth, at middle of length from top of keel to top of beam at side of uppermost continuous deck. See Sec. 3 (1c) D 33.92

Builders FURNESS S. B. CO
Owners BRITISH TANKERS

Co. Ltd., Haverton Hill-on-Tees. Yard No. 390
F.E.

Received from Chief Ship Surveyor

tanker "BRITISH ADMIRAL" REPORT Mdb. No. 18205

The Ship Surveyor are desired on this case for the consideration of the Classing Committee.

to contain a succinct summary of any repairs that have been required and to show the cause or causes of such repairs, and clearly any exceptional features in connection with the case, so that the Classing Committee may have all the salient points of the endorsement."—Extract from Sub-Committee's Report, 24/5/92.)

1st Long. No. 15772

Depth "d" -

2nd Long. No. 44486

Proportions = $\frac{L}{D} = \frac{13.7}{1}$


Framing As approved

Sheerstrake As approved

Two longitudinal bulkheads are fitted.


This vessel appears to have been built in accordance with the Rules and the approved plans, and it is submitted she is eligible to be classed Class "Carrying Petroleum in bulk" 1.47 Mdb.

1 Dk. "Longitudinal framing at bottom and at deck". "pt. Elec. welded".
Cell DBuE 68' 98t, DTf 29' 380t, FPT 163', APT 93'
FK, 17BH, Lloyd's A & CP
P 99' B 48' F 43'
Mchy Aft
O.L. 490.8'
E.S.D.
d†



It is further submitted the Surveyors be informed it is concluded the thickness of the upper deck plating above the longitudinal bulkheads is .82" as approved, that the lengths of the poop and bridge measured in accordance with Circular 1551 are 98.75' and 47.5' respectively, and that the length of the double bottom under the engine measured in accordance with Circular 1284 is 67.5' and not as reported, but they should state if this is so.

See Section 3

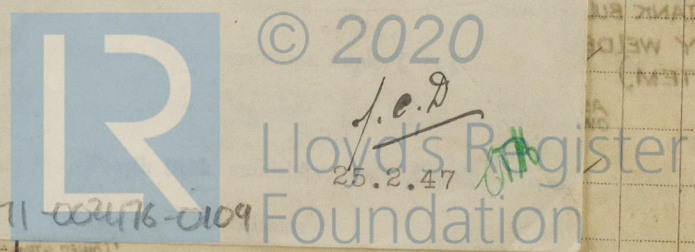

DOUBLE BOTTOM. IN MACHINERY SPACE
Thickness of intercostal plate...
Angles...
Poop Deck, Angle, E... BULB ANGLE 9' x 3 1/2' x 37'
Spacing EVERY FRAME 30'