

# REPORT ON ELECTRIC FITTINGS.

(OTHER THAN FOR THE PROPULSION OF THE VESSEL)

Received at London Office..... 11 SEP 1924

Date of writing Report 19 When handed in at Local Office Sept 9<sup>th</sup> 24 Port of Newcastle

No. in Survey held at Newcastle. Date, First Survey July 14<sup>th</sup> Last Survey Aug. 15<sup>th</sup> 19 24  
 (Number of Visits.....)

Reg. Book. Suff 90673 on the M. S. Silverlarch Tons { Gross 5122  
 Net 3085

Built at Newcastle. By whom built Swan Hunter & Wigham Richardson<sup>ltd</sup> No. 1233 When built 1924

Owners Mount. S. S. Co<sup>ltd</sup> Port belonging to London

Electric Light Installation fitted by Swan Hunter & Wigham Richardson<sup>ltd</sup> Contract No. 1233 When fitted 1924

System of Distribution Double wire

Pressure of supply for Lighting 110 volts, Heating \_\_\_\_\_ volts, Power 110 volts.

Direct or Alternating Current, Lighting Direct Power Direct

alternating current system, state frequency of periods per second \_\_\_\_\_

as the Automatic Governor been tested and found efficient when the whole load is suddenly thrown on or off yes

generators, do they comply with the requirements regarding overload yes, are they compound wound yes

are they over compounded 5 per cent. yes, if not compound wound state distance between each generator \_\_\_\_\_

where more than one generator is fitted are they arranged to run in parallel \_\_\_\_\_, is an adjustable regulating resistance fitted in

series with each shunt field yes

are all terminals accessible and clearly marked yes, are they so spaced or shielded that they cannot be accidentally earthed,

or short circuited yes Are the lubricating arrangements of the generators as per Rule yes.

Position of Generators Engine room starboard side

is the ventilation in way of the generators satisfactory yes, are they clear of all inflammable material yes

if situated near unprotected woodwork or other combustible material, state distance of same horizontally from or vertically above the generators

\_\_\_\_\_ and \_\_\_\_\_, are the generators protected from mechanical injury and damage from water, steam or oil yes

are their axis of rotation fore and aft yes.

Earthing, are the bedplates and frames of the generating plant efficiently earthed yes are the prime movers and

their respective generators in metallic contact yes

Main Switch Boards, where placed Engine room starboard side

If the generators and main switchboard are not placed in the same compartment, is each generator provided with

a fuse on each insulated pole as near as possible to the terminals of the generator, additional to that provided on the main switchboard \_\_\_\_\_

Switchboards, are they placed in accessible positions, free from inflammable gases and acid fumes yes

are they protected from mechanical injury and damage from water, steam or oil yes, if situated near unprotected

woodwork or other combustible material, state distance of same horizontally from or vertically above the switchboards \_\_\_\_\_ and \_\_\_\_\_

are they constructed wholly of durable, incombustible non-absorbent materials yes, is all insulation of high dielectric strength and of

permanently high insulation resistance yes, if semi-insulating material is used, are all conducting parts connected to one pole

insulated from the slab with mica or micanite and the slab similarly insulated from its framework yes, and is the

frame effectively earthed yes. Are the following fittings as per Rule, viz.:— spacing or shielding of live parts

yes, accessibility of all parts yes, absence of fuses on back of board yes, proportion of omnibus

bars yes, individual fuses to voltmeter, pilot or earth lamp yes, connections of switches yes

Main Switchgear, description of switchgear for each generator and each outgoing circuit, and arrangement of equalizer switches Double pole switch

fuses on dynamo mains, Single pole switch double pole fuses on each

outgoing circuit


Instruments on main switchboard one ammeters one voltmeters \_\_\_\_\_ synchronising device for paralleling purposes.

Earth Testing, state what means are provided at the main switchboard for indicating the state of the insulation of the system Earth lamps

coupled to earth through switches & fuses.

Switches, Circuit Breakers and Fusible Cut-outs, do these comply with the requirements of the Rules yes

Section and Distribution Boards, is the construction, protection, insulation, material, and position of these as per rule yes.

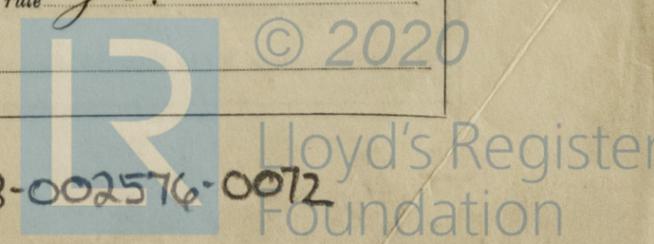

002568-002576-0072

**Insulation of Cables**, state type of cables, single or twin *single* are the cables insulated and protected as per Tables III or IV of the Rules *yes*

**Fall of Pressure**, state maximum between bus bars and any point of the installation under maximum load *3.98 volts*

**Cable Sockets and other connections**, are the ends of all cables having a sectional area of 0.007 square inch and above provided with soldering sockets *yes*

**Paper Insulated Cables**. If cables are paper covered, is the dielectric at the exposed ends of the conductor protected from moisture by being suitably sealed with insulating compound \_\_\_\_\_

**Cable Runs**, are the cables fixed as far as possible in accessible positions not exposed to drip or accumulation of water or oil, or to high temperature from boilers, steam pipes, uptakes or other hot objects, or to avoidable risk of mechanical damage *yes*

**Support and Protection of Cables**, state how the cables are supported and protected *Lead covered + armoured cables in machinery spaces + cargo spaces clipped to beams + girders. Lead covered cables in cabins clipped up.*  
If cables are run in wood casings, are the casings and caps secured by screws \_\_\_\_\_, are the cap screws of brass \_\_\_\_\_, are the cables run in separate grooves \_\_\_\_\_. If armoured and lead covered cables are secured by metal clips, are the clips spaced as per Table VI *yes*

**Refrigerated Chambers**, if lights are fitted, are the cables and fittings in accordance with the special requirements \_\_\_\_\_

**Joints in Cables**, state if any, and how made, insulated, and protected *none made*

**Watertight Glands and Deck Tubes**, are all cables passing through decks and watertight bulkheads provided with deck tubes or watertight glands *yes*

**Bushes in Beams and Non-watertight Positions**, where armoured cables pass through beams and non-watertight partitions, are the holes efficiently bushed *yes* state the material of which the bushes are made *lead*

**Earthing Connections**, state what earthing connections are fitted and their respective sectional areas \_\_\_\_\_, are their connections made as per Rule \_\_\_\_\_

**Alternative Lighting**, are the groups of lights in the propelling machinery space arranged as per Rule *yes*

**Emergency Supply**, state position and method of control of the emergency supply and how the generator is driven *none fitted*

**Navigation Lamps**, are these separately wired *yes*, controlled by separate switch and separate fuses *yes*, are the fuses double pole *yes*, are the switches and fuses grouped in a position accessible only to the officers on watch *yes*, has each navigation lamp an automatic indicator as per Rule *yes*, are separate screens provided for the use of oil and electric side lights *yes*, are separate oil lanterns provided for the mast head lights and side lights *yes*

**Fittings**, are all fittings on weather decks, in stokeholds and engine rooms and wherever exposed to drip or condensed moisture, watertight *yes*, are any fittings placed in spaces in which goods are liable to be stacked in close proximity to them; if so, how are they protected \_\_\_\_\_, are any fittings placed in spaces where inflammable or explosive dust or gases are liable to be present, if so, how are they protected \_\_\_\_\_, how are the cables led \_\_\_\_\_, where are the controlling switches situated \_\_\_\_\_

**Searchlight Lamps**, No. of \_\_\_\_\_, whether fixed or portable \_\_\_\_\_, are their fittings as per Rule \_\_\_\_\_

**Arc Lamps**, other than searchlight lamps, No. of \_\_\_\_\_, are their live parts insulated from the frame or case \_\_\_\_\_, are their fittings as per Rule \_\_\_\_\_

**Motors**, are their working parts readily accessible *yes*, are the coils self-contained and readily removable for replacement *yes*, are the brushes, brush holders, terminals and lubricating arrangements as per Rule *yes*, are the motors placed in well-ventilated compartments in which inflammable gases cannot accumulate and clear of all inflammable material *yes*, are they protected from mechanical injury and damage from water, steam or oil *yes*, are their axis of rotation fore and aft *yes*, if situated near unprotected woodwork or other combustible material, are the motors of the totally enclosed, pipe ventilated, forced draught, drip or flame proof type \_\_\_\_\_, if not of this type, state distance of the combustible material horizontally or vertically above the motors \_\_\_\_\_ and \_\_\_\_\_

**Control Gear and Resistances**, are the generator field and motor speed regulators, starters and controllers constructed as per Rule *yes*

**Lightning Conductors**, where lightning conductors are required, are these fitted as per Rule \_\_\_\_\_

**Ships carrying Oil having a Flash Point less than 150° F.** Have the special requirements of the Rules been complied with regarding switches, joint boxes, section and distribution boards, protection of cables, method of distribution, lead of cables, lights and fittings \_\_\_\_\_

If portable lamps for use in dangerous spaces are supplied, are they of a type approved by the Home Office \_\_\_\_\_

PARTICULARS OF GENERATING PLANT.

DESCRIPTION OF GENERATOR.	No. of	RATED AT				DRIVEN BY.	WHERE DRIVEN BY AN INTERNAL COMBUSTION ENGINE.	
		Kilowatts.	Volts.	Ampères.	Revs. per Min.		Fuel Used.	Flash Point of Fuel.
MAIN ...	1	10	110	91	570	Single cylinder steam engine enclosed type		
AUXILIARY ...								
EMERGENCY ...								
ROTARY TRANSFORMER								

LIGHTING AND HEATING CONDUCTORS.

Ref. No.	DESCRIPTION.	No. of Conductors.	Effective Area of each Conductor. Sq. Ins.	COMPOSITION OF STRAND.		Total Maximum Current. Amperes.	Approximate Length. (Lead and Return.) Feet.	Insulated with	HOW PROTECTED.
				No.	Diameter.				
	MAIN GENERATOR...	2	.1009	19	.083	91	75	V.I.R.	Lead covered
	AUXILIARY GENERATOR								
	EMERGENCY GENERATOR								
	ROTARY TRANSFORMER...								
	AUXILIARY SWITCHBOARDS								
	ENGINE ROOM	2	.01462	17	.052	30	12	"	Lead covered + arm'd.
	BOILER ROOM								
	Officers + navigation	2	.02214	7	.064	18	414	"	Lead covered
	Engineers screw	2	.01046	7	.044	22	194	"	Lead covered
	Cargo lights	2	.02214	7	.064	33	192	"	V.I.R. in conduit
	WIRELESS	2	.02214	7	.064	15	440	"	V.I.R. in conduit
	SEARCHLIGHT								
	MASTHEAD LIGHT...	2	.00194	3	.029	1.02	570	"	to to
	SIDE LIGHTS...	2	.00194	3	.029	1.02	38	"	Lead covered
	COMPASS LIGHTS...	2	.00152	1	.044	.25	29	"	to to
	Stem Lights	2	.00194	3	.029	1.02	600	"	V.I.R. in conduit
	CARGO LIGHTS	2	.00194	3	.029	5.0	200	"	to to
	ARC LAMPS								
	HEATERS								

MOTOR CONDUCTORS.

Ref. No.	DESCRIPTION.	No. of Motors.	Effective Area of each Conductor. Sq. Ins.	COMPOSITION OF STRAND.		Total Maximum Current. Amperes.	Approximate Length. (Lead and Return.) Feet.	Insulated with	HOW PROTECTED.
				No.	Diameter.				
	BALLAST PUMP								
	MAIN BILGE LINE PUMPS								
	GENERAL SERVICE PUMP								
	EMERGENCY BILGE PUMP								
	SANITARY PUMP								
	CIRC. SEA WATER PUMPS								
	CIRC. FRESH WATER PUMPS								
	AIR COMPRESSOR								
	FRESH WATER PUMP								
	ENGINE TURNING GEAR								
	ENGINE REVERSING GEAR								
	LUBRICATING OIL PUMPS								
	OIL FUEL TRANSFER PUMP								
	WINDLASS								
	WINCHES, FORWARD								
	WINCHES, AFT								
	STEERING GEAR								
	WORKSHOP MOTOR								
	VENTILATING FANS								
	Galley Range Compressor for oil fired galley.	1	.00299	3	.036	8	120	V.I.R.	Lead covered.

All Conductors are of annealed copper conforming to British Standard Specification No. 7.  
 The Insulated Conductors are guaranteed to withstand the immersion and resistance tests specified in the Rules.  
 The foregoing is a correct description.

SWAN, HUNTER, & WISHAM RICHARDSON LTD.

Electrical Engineers.

Date 2nd Sept 1924

*W. Ross.*

COMPASSES.

Distance between electric generators or motors and standard compass 260 feet

Distance between electric generators or motors and steering compass 260 feet.

The nearest cables to the compasses are as follows:—

A cable carrying .25 Ampères on the feet from standard compass 6 feet from steering compass.

A cable carrying .25 Ampères 6 feet from standard compass on the feet from steering compass.

A cable carrying 5 Ampères 3 feet from standard compass 8 feet from steering compass.

Have the compasses been adjusted with and without the electric installation at work at full power *yes*

Has the effect of switching on and off circuits, motors and other electro-magnetic apparatus within the vicinity of the compasses been noted *yes*.

The maximum deviation due to electric currents was found to be *nil* degrees on *all* course in the case of the standard

compass, and *nil* degrees on *all* course in the case of the steering compass.

SWAN, HUNTER & WISHAM RICHARDSON LTD.

Builder's Signature.

Date 2nd Sept 1924

*W. Ross.*

Is this installation a duplicate of a previous case *yes*. If so, state name of vessel *Silverpine*

General Remarks (State quality of workmanship, opinions as to class, &c.)

*The above installation is in accordance with the Society's Rules. The vessel is eligible in my opinion for notation elec light, wireless.*

**It is submitted that  
 this vessel is eligible for  
 THE RECORD. Elec light.**

*W.T. Badger*  
 12/9/24

Total Capacity of Generators 10 Kilowatts

The amount of Fee ... ..	£ 10 : ' ::	When applied for, 19 Aug 1924	<i>17/5</i>
Travelling Expenses (if any) £	:	When received, 23 Aug 1924	

*W.T. Badger*  
 Surveyor to Lloyd's Register of Shipping.

Committee's Minute

Assigned

*Lancaster*

Im. 0.25—Transfer.  
 (The Surveyors are requested not to write on or below the space for Committee's Minute.)



© 2020

Lloyd's Register  
 Foundation