

Timber and Space..... each 22

Middle Ends

Outside.

Inches.

Inside.

East Walling

4x 12  
5  
3  
3  
4  
4  
2  
12  
12  
3  
Inch  
41  
78  
green  
ons,  
ber.  
my.

248.3

PORTER & CO'S PATENT ANCHOR.



FIG 1-Position of the Anchor when canted.

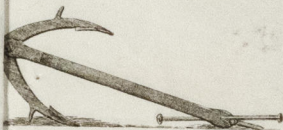


FIG 2-Shews the action of the toggle which has brought the upper pee from the shank to the ground, in the position to enter.



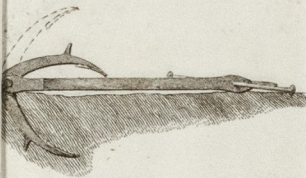


FIG 3-View of the Anchor in the ground with the upper pee on the shank in which position it remains. The dotted line shews the position in which the upper pee of a common anchor would be if placed by its side.

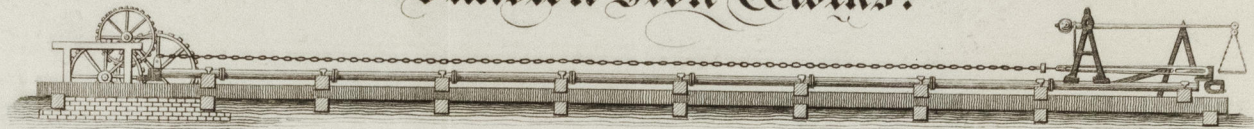

## TESTING MACHINE FOR PROVING CHAIN CABLES

This is to certify that I have this 15<sup>th</sup> day of Jan<sup>y</sup> 1848.  
Proved for the Hercules Burthen 341 Tons-Register  
Captain Wilton 100. Fathoms of 1<sup>5</sup>/<sub>16</sub> Inch Chain equal to  
14<sup>1</sup>/<sub>4</sub> Inch Rope. Manufactured by James Honiball and  
numbered 887. Tested to 34 Tons.



© 2021

John Lloyd's Register  
Inspector  
Foundation

The rest of the Shifts of the Frame are

Good