

X

COPY


15th January, 1946.

COPENHAGEN

11808 "ALFRED CLEGG" This vessel has been classed "100A1 Carrying Petroleum in bulk" with the various notations recommended by you including "Launched 1940", "Commissioned 1945-11 mo".

The plan of General Pumping Arrangement has been examined and found in order. The plan of Oil Fuel Burning Arrangement has also been examined and it is noted that two complete oil fuel burning units have not been fitted as required by the Rules, the present installation comprising two pumps, one heater, two suction filters and a discharge filter fitted at each burner. With regard thereto I have to inform you that since most of the auxiliaries required for essential services at sea are steam driven, the Rule requirements regarding the provision of two complete oil burning units should be complied with and I shall be glad if you will arrange with the Owners for the provision of an additional oil fuel heater and a duplex discharge strainer. A record of LMC 11,45 has been assigned subject to this being done.

I shall be glad to hear from you in due course what action you have taken in this matter.

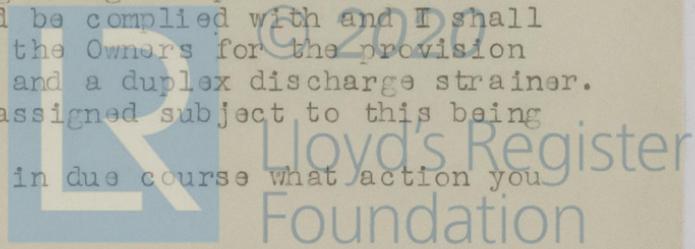

002667-002673-0045