


G.R. 130

(LLOYD'S REGISTER.)

VESSELS OF 100 TONS AND UPWARDS.

These particulars are supplied by the Registrar General of Shipping and Seamen for the sole use of Lloyd's Register of Shipping.
Signal Letters (if any) **G.Z.Q.N.**



Official Number. 164122	Name of Ship. LOCH DEE	No., Date, and Port of Registry. 24/1937 GLASGOW.
-----------------------------------	----------------------------------	---

No., Date, and Port of previous Registry (if any). -				
Whether British or Foreign Built. British	Whether a Sailing, Steam, or Motor Ship, if Steam or Motor Ship how propelled. Steam Screw	Where Built. Sunderland	When Built. 1937	Name and Address of Builders. Joseph L. Thompson & Sons Ltd., Sunderland.
Number of Decks One & Shelter deck	Length from fore part of stem, to the aft side of the head of the stern post	Feet. 420	Tenths. 0.0	
Number of Masts Two	Main breadth to outside of plank	58	9.0	
Rigged Not	Depth in hold from tonnage deck to ceiling amidships	26	4.0	
Stem Straight Raked	Depth in hold from upper deck to ceiling amidships, in the case of three decks and upwards	-	-	
Stern Cruiser	Depth from top of deck at side amidships to bottom of keel	29	0.0	
Build Clencher	Round of beam	1	2.0	
Framework and description of vessel Steel Cargo	Length of engine room, if any	50	0.0	
Number of Bulkheads Watertight = 7 Non-Watertight = 1				

Particulars of propelling Engines, etc., (if any), and Water Ballast Tanks, as supplied by Builders, Owners, or Engine Makers.

No. of sets of Engines.	Description of Engines.	Whether British or Foreign Made.	When made.	Name and address of makers.	Reciprocating Engines.		Rotary Engines.	N. H. P. I. H. P. Estimated Speed of Ship.
					No. and Diameter of Cylinders in each set.	Length of Stroke.		
One	Triple Expansion direct acting Vertical	Engines. British	Engines. 1937	Engines. and	Three 23"	45"	-	409
One	Cyl. Multitubular Three Steel 220 lbs.	Boilers. British	Boilers. 1937	Boilers. The North Eastern Marine Eng. Co. Ltd., Sunderland.	38" 65"			2000 11 Knots

Number of water ballast tanks, and their capacity in tons:— eight = 1808 tons

PARTICULARS OF TONNAGE.

GROSS TONNAGE.		No. of Tons.	DEDUCTIONS ALLOWED.		No. of Tons.
Under Tonnage Deck		4756.40	On account of space required for propelling power		1680.58
Space or Break between Decks			On account of spaces occupied by Seamen, or Apprentices, and appropriated to their use, and kept free from Goods or Stores of every kind, not being the personal property of the Crew		299.47
Turret or Trunk		34.40	These spaces are the following, viz:— In 'tween decks and four deck houses.		
Forecastle		128.64	(Number of seamen or apprentices for whom accommodation is certified:— 42 .)		
Bridge space Houses in Shelter		12.10	Deductions under Section 79 of the Merchant Shipping Act, 1894, and Section 54 of the Merchant Shipping Act, 1906, as follows:—		
Poop or Break		260.14	Master's Accmdn. 24.03		
Side Houses		6.55	Chart Space 6.55		
Deck Houses		30.26	Wireless Space 3.12		
Chart House		23.31	Bosn's Store 34.40		
Spaces for Machinery, and light, and air, under Section 78 (2) of the Merchant Shipping Act, 1894			Water Ballast Spaces 225.52		
Excess of Hatchways			Total .. 225.52		
Gross Tonnage		5251.80			293.62
Deductions, as per contra		2273.67			
Register Tonnage		2978.13			2273.67


NOTE 1.—The tonnage of the engine room spaces below the Upper Deck is **652.64** tons, and the tonnage of the total spaces framed in above the Upper Deck for propelling machinery and for light and air is **121.76** tons.

NOTE 2.—The undermentioned spaces above the Upper Deck are not included in the cubical contents forming the ship's register tonnage.

Shelter 'Tween Decks; Part I	L 368.4'	= 1595.43 tons.
do. Part II	L 5.0'	= 14.47 tons.
Forecastle	L 39.1'	= 84.78 tons.

Name of Master	Certificate of	Service No.	No.
No. of Owners	Competency		
Name, Residence, and Description of Managing Owner if there are more owners than one. Steamship "Induwa" Company Limited, 21, Bothwell Street, Glasgow, C.2.			
<i>(By Share)</i> Hon. Joseph Paton Maclay - same address - Manager.			
Dated 8th May, 1937.			

*940. Wt.17581/626. 500. S/36. W.y.P.C. 613.
1779. Wt.28798/645. 1000. 12/36.

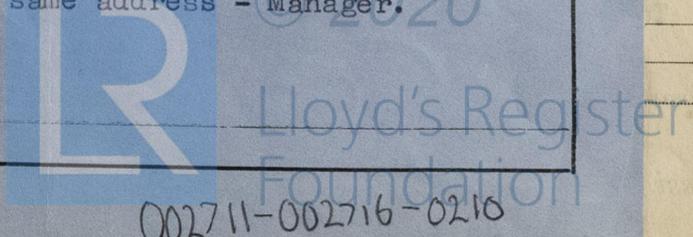

002711-002716-0210

02711-02716-0212

the Plans should be embodied.)

Plans showing Vessel as built should be forwarded and a List of

Rpt.



© 2020

Lloyd's Register
Foundation

received by
ESSEL'S
The Rema

SPE

Particul
Cast &
Weight
Numb
of Tes

PARTY

No. and

Offic

particula

PARTY

Double be
Double be
Double be
Double be
Double be

Order for

Date

Handwritten marks: a circle with a dot inside, a horizontal line, and a stylized 'K' or 'R' shape.