

No. S-6/59.

S/S. "CHA"

COPIA

Registry: PANAMENIAN

Tonnage: 4098 Tons gross. - 2358 Tons net.

Moored at South side of Fiscal pier #2, Ver.

At the request of Messrs. WATSON, PHILLIPS Y CIA., SUCS., S.A. Lloyd's Agents for the district of Veracruz, the undersigned, ROBERT DOBBIE, did proceed on board above mentioned vessel on the 3rd day of February 1959 to inspect damage to vessel when coming alongside - helped by two tugs and with pilot on board during a very slight South wind and reports as follows:

FOUND:

FROM PIER, PLATES NOS. THIRTEEN FROM FORWARD AND THREE AND FOUR FROM UPPERDECK WERE SEEN WITH DEEP INDENT, FIFTY INCHES VERTICALLY BY EIGHTYFOUR INCHES HORIZONTALLY.


INSPECTED INTERNALLY, BULKHEAD WAS FOUND TORN FREE FROM ANGLE FRAME FORTY INCHES VERTICALLY, ANGLE FRAME OUT OF LINE WITH BULKHEAD, BULKHEAD ROLLED UP AND CRUMPLED FROM FRAME IN TO A MAXIMUM OF TWENTY INCHES.

A CONSIDERABLE NUMBER OF LOOSE RIVETS AND OPEN SEAMS WERE SEEN.

RECOMMENDED:

IT WAS RECOMMENDED THAT ALL RIVETS BE REMOVED FROM DAMAGED SECTION OF BULKHEAD AND ANGLE FRAME AND BULKHEAD CROPPED TWENTY INCHES TEMPLET MADE AND NEW PLATE CUT TO TEMPLET PLACED AND STRONGLY WELDED IN ENGINE ROOM AND IN NO. FOUR, PLATE TO BE WELDED TO ANGLE FRAME THROUGH RIVET HOLES, ALL SEAMS TO BE WELDED INTERNALLY AND EXTERNALLY TWELVE INCHES BEYOND DAMAGE. ALL RIVETS TO BE WELDED TO PLATES.

Carried forward...

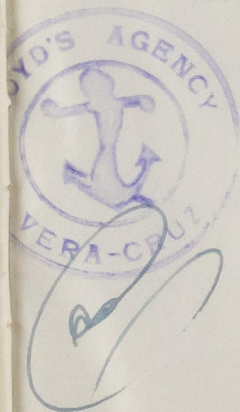

002750-002753-0052-12

© 2020


Lloyd's Register
Foundation

COPIA

No. S-6/59.

s/s. "CHA"

Sheet #2.

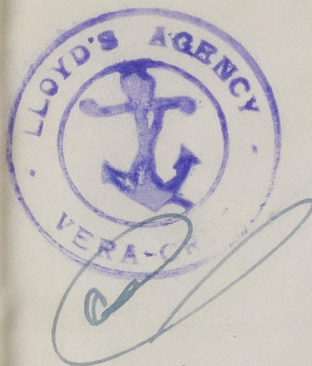

###ABOVE RECOMMENDATIONS HAVING BEEN CARRIED OUT
SATISFACTORILY THIS DATE, AND AFTER THE INSPECTION I
HAVE BEEN ABLE TO CARRY OUT AS FAR AS POSSIBLE, I
CONSCIENTIOUSLY BELIEVE THIS VESSEL TO BE IN A
SEAWORTHY CONDITION AS REGARDS ABOVE DAMAGE.


This Certificate is issued without prejudice and subject
to the terms, conditions and amount of the Insurance Policy.

Issued in Original and copies, one of which being
accomplished, the others to stand null and void.

H. Veracruz, ver. February 9th, 1959.

Robert Dobbie

Robert Dobbie
(Surveyor)

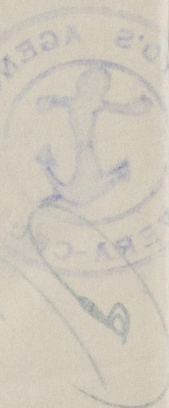

© 2020

0052 3/2
Lloyd's Register
Foundation