

# REPORT ON ELECTRICAL EQUIPMENT.

(OTHER THAN FOR THE PROPULSION OF THE VESSEL)

Received at London Office AUG 26 1938

Date of writing Report 22-8-1938 When handed in at Local Office 10 Port of Groningen  
 No. in Survey held at Waterhuizen Date, First Survey 26-7-38 Last Survey 16-8-1938  
 Reg. Book. (Number of Visits.....6)  
 on the steel single screw motor vessel "BART." Tons { Gross 434.85  
Net 228.77  
 Built at Waterhuizen By whom built Scheepwerf Waterhuizen Yard No. 173 When built 1938  
 Owners J. Dekker Port belonging to Groningen  
 Electric Light Installation fitted by Herman Echels at HOOGE LAND Contract No.            When fitted 1938  
 Is the Vessel fitted for carrying Petroleum in bulk no

System of Distribution two wire system

Pressure of supply for Lighting 26 volts, Heating ✓ volts, Power ✓ volts.

Direct or Alternating Current, Lighting Direct Power ✓

If alternating current system, state frequency of periods per second ✓

Has the Automatic Governor been tested and found efficient when the whole load is suddenly thrown on or off yes

Generators, do they comply with the requirements regarding temperature rise yes, are they compound wound no

are they over compounded 5 per cent. ✓, if not compound wound state distance between each generator ✓

Where more than one generator is fitted are they arranged to run in parallel ✓, is an adjustable regulating resistance fitted in series with ~~each~~ shunt field yes Have certificates of test results for machines under 100 kw. been submitted and approved yes Have machines over 100 kw. been inspected by the Surveyors during manufacture and testing ✓

Have certificates for generators under 100 kw. been supplied and approved yes

Are all terminals accessible, clearly marked, and furnished with sockets yes, are they so spaced or shielded that they cannot be accidentally earthed, short circuited, or touched yes Are the lubricating arrangements of the generators as per Rule yes

Position of Generators In engine room on Portside, is the ventilation in way of the generators satisfactory yes are they clear of all inflammable material yes if situated near unprotected

woodwork or other combustible material, state distance of same horizontally from or vertically above the generators ✓ and ✓

are the generators protected from mechanical injury and damage from water, steam or oil yes, are their axes of rotation fore and aft yes


Earthing, are the bedplates and frames of the generating plant efficiently earthed yes are the prime movers and their respective generators in metallic contact yes Main Switch Boards, where placed In engine room on Portside casing bulkhead

If the generators and main switchboard are not placed in the same compartment, is each generator provided with a fuse on each insulated pole as near as possible to the terminals of the generator, additional to that provided on the main switchboard ✓

Switchboards, are they placed in accessible positions, free from inflammable gases and acid fumes yes, are they protected from mechanical injury and damage from water, steam or oil yes, if situated near unprotected woodwork or other combustible material, state distance of same horizontally from or vertically above the switchboards ✓ and ✓, are they constructed wholly of durable, non-ignitable non-absorbent materials yes, is all insulation of high dielectric strength and of permanently high insulation resistance yes, is it of an approved type yes, if semi-insulating material is used, are all conducting parts insulated from the slab with mica or micanite or other non-hygroscopic insulating material, and the slab similarly insulated from its framework yes, is the non-hygroscopic insulating material of an approved type yes, and is the frame effectively earthed yes Are the fittings as per Rule regarding:— spacing or shielding of live parts yes, accessibility of all parts yes, absence of fuses on back of board yes, temperature rise of omnibus bars nihil, individual fuses to voltmeter, pilot or earth lamp yes, are moving parts of switches alive in the "off" position no are all screws and nuts securing connections effectively locked yes are any fuses fitted on the live side of switches no Main Switchgear, description of switchgear for each generator and each outgoing circuit, and arrangement of equalizer switches single pole quick circuit switch

Are turbine driven generators fitted with emergency trip switch as per rule ✓ Are cupboards or compartments containing switchboards composed of fire-resisting material or lined with approved material ✓ Instruments on main switchboard 2 ammeters one voltmeters ✓ synchronising device for paralleling purposes. For compound machines is the ammeter connected on the opposite pole to equaliser connection ✓

Earth Testing, state what means are provided at the main switchboard for indicating the state of the insulation of the system two lamps in series connected to earth Switches, Circuit Breakers and Fusible Cut-outs, do these comply with the requirements of the Rules yes are the fusible cutouts of an approved type yes have the reversed ✓

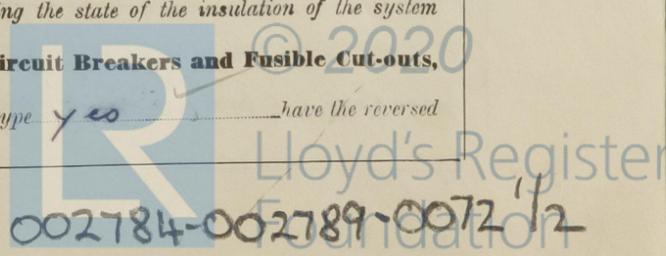

current protection devices been tested under working conditions yes are all fuses labelled as per rule yes

**Joint Boxes, Section and Distribution Boards;** is the construction, protection, insulation, material, and position of these as per rule yes

**Cables:** Single, twin, concentric, or multicore all type are the cables insulated and protected as per Tables IV, V, X, XI, XII or XIII of the Rules yes

If the cables are insulated otherwise than as per Rule, are they of an approved type ✓ **Fall of Pressure,** state maximum between bus bars and any point of the installation under maximum load less than 2 1/2

**Cable Sockets,** are the ends of all cables having a sectional area of 0.04 square inch and above provided with soldering sockets yes

**Paper Insulated and Varnished Cambric Insulated Cables,**

If conductors are paper or varnished cambric insulated, is the dielectric at the exposed ends of the conductor protected from moisture by being suitably sealed with insulating compound ✓, or waterproof insulating tape ✓

**Cable Runs,** are the cables fixed as far as possible in accessible positions not exposed to drip or accumulation of water or oil, or to high temperature from boilers, steam pipes, uptakes or other hot objects, or to avoidable risk of mechanical damage yes are cables laid under machines or floorplates no if so, are they adequately protected ✓

Are cables in machinery spaces, galleys, laundries, bathrooms and lavatories lead covered or run in conduit yes

**Support and Protection of Cables,** state how the cables are supported and protected galvanised iron clips with transverse

If cables are run in wood casings, are the casings and caps secured by screws ✓, are the cap screws of brass ✓, are the cables run in separate grooves ✓ If armoured and lead covered cables are secured by metal clips, are the clips spaced as per Table VIII yes

**Refrigerated Chambers,** are the cables and fittings in accordance with the special requirements ✓

**Joints in Cables,** state if any, and how made, insulated, and protected ✓

**Watertight Glands and Deck Tubes,** are all cables passing through decks and watertight bulkheads provided with deck tubes or watertight glands yes

**Bushes in Beams and Non-watertight Partitions,** where unarmoured cables pass through beams and non-watertight partitions, are the holes efficiently bushed yes state the material of which the bushes are made lead

**Earthing Connections,** state what earthing connections are fitted and their respective sectional areas ✓

are their connections made as per Rule yes

**Alternative Lighting,** are the groups of lights in the propelling machinery space arranged as per Rule yes **Emergency Supply,** state position and method of control of the emergency supply and how the generator is driven ✓

**Navigation Lamps,** are these separately wired yes, controlled by separate switch and separate fuses yes, are the fuses double pole yes

are the switches and fuses grouped in a position accessible only to the officers on watch yes

has each navigation lamp an automatic indicator as per Rule yes **Secondary Batteries,** are they constructed and fitted as per Rule yes

are they ventilated as per Rule yes

**Fittings,** are all fittings on weather decks, in stokeholds and engine rooms and wherever exposed to drip or condensed moisture, watertight yes

are any fittings placed in spaces in which goods are liable to be stacked in close proximity to them; if so, how are they protected ✓

are any fittings placed in spaces where inflammable or explosive dust or gases are liable to be present, if so, how are they protected ✓

how are the cables led ✓

where are the controlling switches situated ✓

are all fittings suitably ventilated yes, are all switches and lampholders constructed wholly of non-ignitable, non-absorbent materials yes

**Heating and Cooking Appliances,** are they constructed and fitted as per Rule ✓, are air heaters constructed and fitted as per Rule ✓

**Searchlight Lamps,** No. of one whether fixed or portable portable, are their fittings as per Rule yes

**Motors,** are their working parts readily accessible ✓, are the coils self-contained and readily removable for replacement ✓

are the brushes, brush holders, terminals and lubricating arrangements as per Rule ✓, are the motors placed in well-ventilated compartments in which inflammable gases cannot accumulate and clear of all inflammable material ✓

are they protected from mechanical injury and damage from water, steam or oil ✓ are their axes of rotation fore and aft ✓ if situated near unprotected woodwork or other combustible material, are the motors of the totally enclosed, pipe ventilated, forced draught, drip or flame proof type ✓

if not of this type, state distance of the combustible material horizontally or vertically above the motors ✓ and ✓

have machines of over 100 BHP been inspected by the Surveyors during manufacture and testing ✓ have certificates for all motors for essential services been supplied and approved ✓

**Control Gear and Resistances,** are the generator field and motor speed regulators, starters and controllers constructed and fitted as per Rule yes

**Lightning Conductors,** where lightning conductors are required, are these fitted as per Rule yes

**Ships carrying Oil having a Flash Point less than 150° F.** Have the special requirements of the Rules been complied with regarding switches, joint boxes, section and distribution boards, protection of cables, method of distribution, lead of cables, lights and fittings ✓

are all fuses of the fitted cartridge type ✓ are they of an approved type ✓

If portable lamps for use in dangerous spaces are supplied, are they of a self-contained, battery-fed flameproof type approved for use in dangerous spaces ✓

**Spare Gear,** if the vessel is for open sea service have spares been supplied as per Rule yes are they suitably stored in dry situations yes

PARTICULARS OF GENERATING PLANT.

DESCRIPTION OF GENERATOR.	No. of	RATED AT				DRIVEN BY	WHERE DRIVEN BY AN INTERNAL COMBUSTION ENGINE	
		Kilowatts.	Volts.	Ampères.	Revs. per Min.		Fuel Used.	Flash Point of Fuel.
MAIN	1	496	26	30	1059/850	aux. heavy oil eng.	Fossil Oil	above 150° F.
AUXILIARY								
EMERGENCY								
ROTARY TRANSFORMER								

GENERATOR, LIGHTING AND HEATING CONDUCTORS.

DESCRIPTION.	CONDUCTORS.		COMPOSITION OF STRAND.		TOTAL MAXIMUM CURRENT. AMPERES.		Approximate Length. (Lead and Return.) Feet.	Insulated with	HOW PROTECTED.
	No. per Pole.	Total Nominal Area per Pole Sq. Ins.	No.	Diameter.	In Circuit.	Rule.			
MAIN GENERATOR	1	10	7	1.35	37	39	22	rubber	lead and steel wire
EQUALISER CONNECTIONS									
AUXILIARY GENERATOR									
EMERGENCY GENERATOR									
ROTARY TRANSFORMER (MOTOR GENERATOR)									
ENGINE ROOM	1	2.5	1	1.8	5	15.5	50	"	"
BOILER ROOM	1	1.5	1	1.4	1	9.5	50	"	"
AUXILIARY SWITCHBOARDS									
ACCOMMODATION	1	2.5	1	1.8	5	15.5	50	"	"
	1	1.5	1	1.4	1	9.5	200	"	"
	1	1.5	1	1.4	1	9.5	120	"	lead
WIRELESS									
SEARCHLIGHT	1	2.5	1	1.8	1.4	15.5	24	"	lead & steel wire
MASTHEAD LIGHT	1	1.5	1	1.4	1.5	9.5	140	"	"
SIDE LIGHTS	1	1.5	1	1.4	1.5	9.5	25	"	"
COMPASS LIGHTS	1	1.5	1	1.4	0.12	9.5	6	"	"
POOP LIGHTS	1	1.5	1	1.4	1.5	9.5	60	"	"
CARGO LIGHTS	1	2.5	1	1.8	3.	15.5	50	"	"
HEATERS									

MOTOR CONDUCTORS.

DESCRIPTION.	No. of Motors.	CONDUCTORS.		COMPOSITION OF STRAND.		TOTAL MAXIMUM CURRENT. AMPERES.		Approximate Length. (Lead and Return.) Feet.	Insulated with	HOW PROTECTED.
		No. Per Pole.	Total Nominal Area per Pole Sq. Ins.	No.	Diameter.	In Circuit.	Rule.			
BALLAST PUMP										
MAIN BILGE LINE PUMPS										
GENERAL SERVICE PUMP										
EMERGENCY BILGE PUMP										
SANITARY PUMP										
CIRC. SEA WATER PUMPS										
CIRC. FRESH WATER PUMPS										
AIR COMPRESSOR										
FRESH WATER PUMP										
ENGINE TURNING GEAR										
ENGINE REVERSING GEAR										
LUBRICATING OIL PUMPS										
OIL FUEL TRANSFER PUMP										
WINDLASS										
WINCHES, FORWARD										
WINCHES, AFT										
STEERING GEAR—										
(a) MOTOR GENERATOR										
(b) MAIN MOTOR										
WORKSHOP MOTOR										
VENTILATING FANS										

The Electrical Equipment is installed in accordance with the approved plans.  
 All Insulated Conductors are guaranteed to withstand the immersion and resistance tests specified in the Rules.  
 The foregoing is a correct description.

*Therment/Sch...*

Electrical Engineers.

Date 24-8-38

**COMPASSES.**

Minimum distance between electric generators or motors and standard compass 30 ft.

Minimum distance between electric generators or motors and steering compass 24 ft.

The nearest cables to the compasses are as follows:—

A cable carrying 12 Ampères 6 feet from standard compass 1 feet from steering compass.

A cable carrying 1 Ampères 3 feet from standard compass 3 feet from steering compass.

A cable carrying 6 Ampères 12 feet from standard compass 4 feet from steering compass.

Have the compasses been adjusted with and without the electric installation at work at full power yes

Has the effect of switching on and off circuits, motors and other electro-magnetic apparatus within the vicinity of the compasses been noted yes

The maximum deviation due to electric currents was found to be nihil degrees on every direction course in the case of the standard compass, and nihil degrees on every course in the case of the steering compass.

SCHIEP SWER  
 "WATERBUZEN"  
*Prattje*

Builder's Signature.

Date 25-8-38

Is this installation a duplicate of a previous case no If so, state name of vessel

General Remarks (State quality of workmanship, opinions as to class, &c.)

*This installation has been fitted in accordance to the Society's Rules, approved plans and Secretary's letters and was found in a good working condition, when tried and in our opinion may merit the Committee's approval*

*Noted  
 2/9/38*

Total Capacity of Generators 0.96 Kilowatts.

The amount of Fee ... £ 60 : When applied for, 19...

Travelling Expenses (if any) £ : : When received, 2/9/38

*L. H. Hebrmeijer*  
*Willems*  
 Surveyor to Lloyd's Register of Shipping.

Committee's Minute

Assigned *L. H. Hebrmeijer*

20.12.36.—Transfer. The Surveyors are requested not to write on or below the space for Committee's Minute.)