

Lloyd's Register of Shipping.


Ship's Name *"STANHALL"*Official No. *147306.*

Memorandum of alterations reported since ship was surveyed for assignment of Load Lines in _____

The following work has been carried out at this time in respect of _____
re-opening the tonnage opening of the above vessel (See London letter of 7th July, 1948).


1. The tonnage opening in the shelter deck has been restored and closed by efficient temporary wood covers.
2. Openings in tonnage well forward bulkhead closed by wood boards in riveted channels.
3. Scuppers from tween decks led to forward and after ends of machining space bilges (P & S) provided with self closing cocks at lower ends.
4. Overboard scuppers (1P & 1S), 5" dia. fitted in tonnage well, each with screw down automatic non return valve controlled from the shelter deck, with indicators showing whether the valve is open or shut.
5. All hatchways on second deck have coamings, covers, supports, bearing surfaces, tarpaulins, cleats and battening arrangements in accordance with the rules.

Thames & Mersey

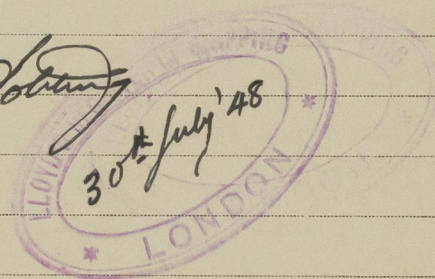

G.H.W.

13 AUG 1948



© 2020

Lloyd's Register
Foundation