

Urgent

S.S. "SHAHRISTAN" Messrs. The Wallsend Slipway & Engineering Co., Ltd.

-----

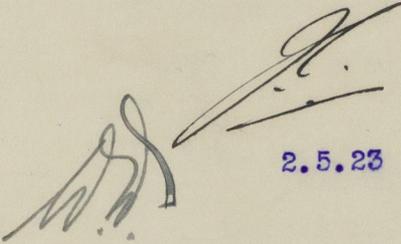
It is submitted that the plan of oil fuel piping arrangements merits approval, provided the flash point of the oil fuel be above 150°F and the remaining requirements of Section 49 of the Rules (1921-22) be complied with.

It is noted that suitable fire extinguishing steam lines are being fitted and that there is now no connection between pumps which have bilge suctions and the boilers.

It is concluded that the steam at all oil pressure pumps is controlled in accordance with the requirements of the Rules and that <sup>THE</sup> air pipes of all oil fuel storage tanks are of not less sectional area than the respective tank filling pipes.

Wire. The Newcastle Surveyors should be advised by wire as requested.

Return 1 plan & retain  
copy for reference

  
2.5.23

Wire.

"SHAHRISTAN OIL FUEL ARRANGEMENTS APPROVED PROVIDED  
REMAINING REQUIREMENTS SECTION 49 COMPLIED WITH  
CONCLUDED STEAM CONTROLS PRESSURE PUMPS AND TANK  
AIR PIPES ACCORDANCE RULES"

Telahr 2/8/23



© 2020

Lloyd's Register  
Foundation

002825-002829-0060