

Note:- After Peak Tank to be pumped full & emptied with Donkey, & connection to be made for discharging through wash deck pipes when required, in addition to the ordinary discharge pipes.

Copy of plan approved by Lloyd's.


Under deck tonnage about 3290 tons.

S.S. N<sup>o</sup> 586. 604.

PUMPING ARRANGEMENT.

SCALE  $\frac{1}{8}$ " = 1 FOOT.

Note:- In lieu of separate hand-pumps for each hold; one vertical fly-wheel hand pump placed on deck of suitable size to pump from the ends of vessel, with  $3\frac{1}{2}$ " suction, will be connected to steam suction pipes leading from each hold, left not to exceed 24 feet.

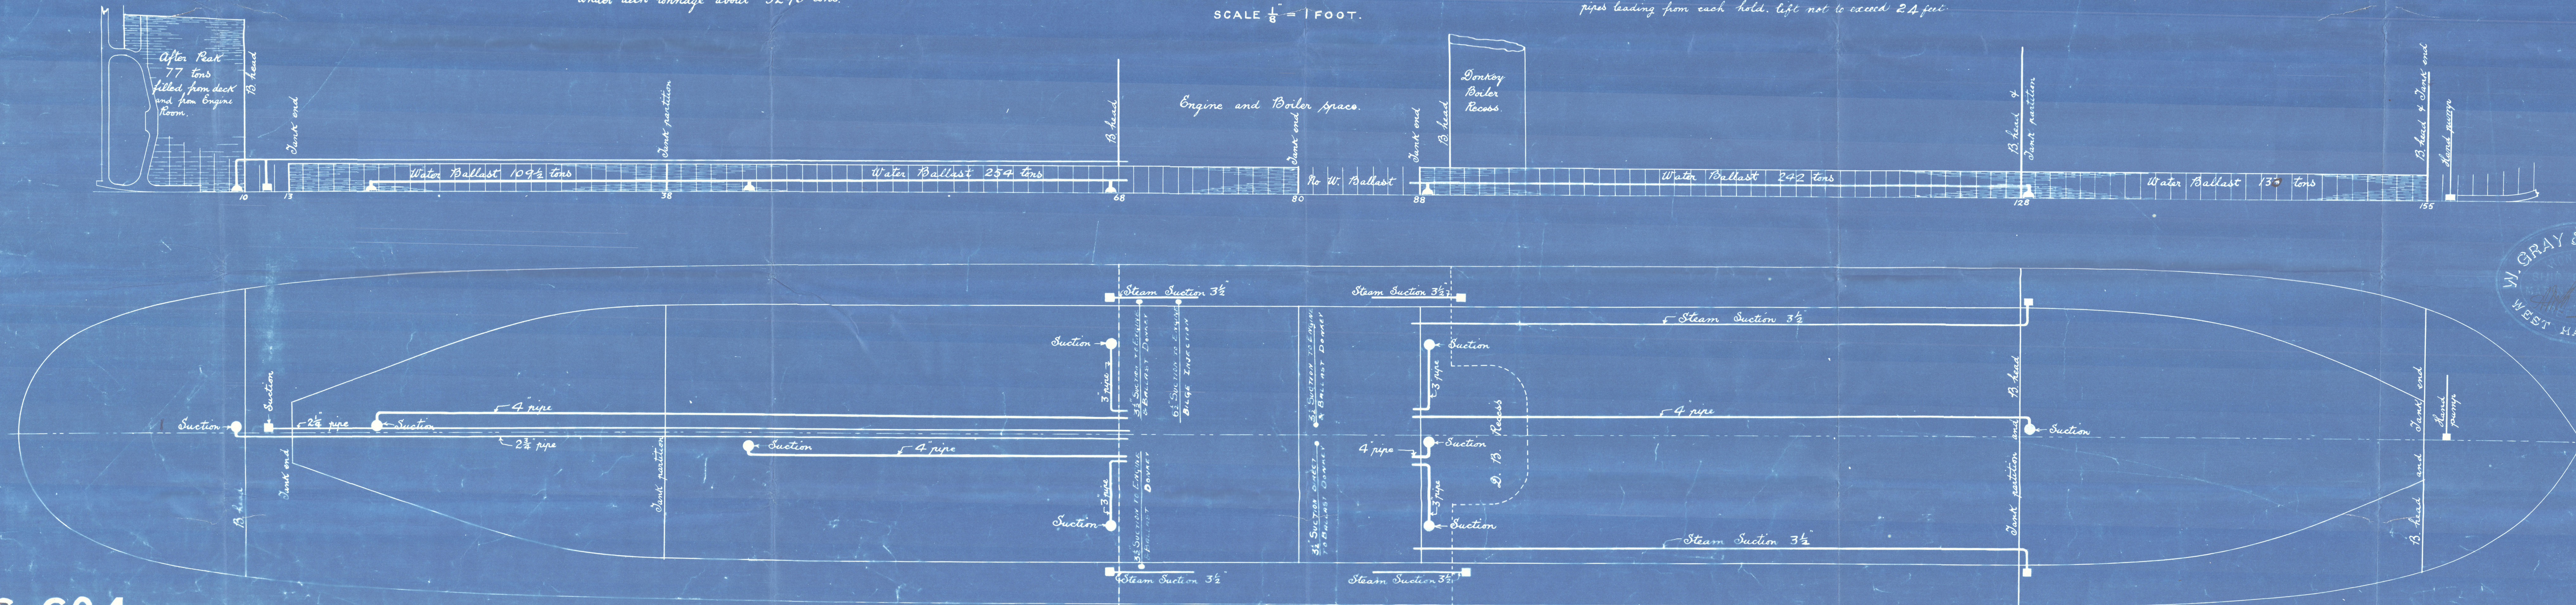

586. 604.

Air and sounding pipes to be fitted.



W Gray & Co.  
No. 604.

Pumping plan.



"Shirley"  
Hpl Report No. 11115

HIPL 388-0058

© 2020

Lloyd's Register  
Foundation