

COPY.

# Lloyd's Register of Shipping.

Port of Düsseldorf.

8th August 1929.

Order: Fl.127/Fl.83813.

This is to Certify that

Friedrich Kohlsaat

the undersigned Surveyor to this Society did at the request of

Messrs. Mannesmannröhren-Werke Abt. Walzwerk of Düsseldorf-Rath test and inspect on the 5th August 1929 at their work the undermentioned seamless Siemens-Martin Steel air receivers, ordered by Messrs. Fiat British Auxillaries Ltd. of Glasgow.

Specification.

No. of rec.	Outs. diam.	Thickness of shell	Length of receivers
12	232 mm	11 mm	1430 mm

Results of tests.


Sample No.	Tensile ten. in kg.p.sq.mm.	Elongation in 200 mm
86	58,4	21,5%
87	59,3	20,0%
88	57,5	19,0%

Bend tests good.

Hydraulic test: 2000 lbs.p.sq.inch.  
Working pressure not to exceed: 1000 lbs.p.sq.inch.  
For identification the receivers have been stamped as follows:

- .....
- . No.649 - 660 .
- . LLOYDS TEST .
- . 2000 lbs. .
- . W.P.1000 lbs..
- . F.K.5.8.29. .
- .....

*F. Kohlsaat.*  
Surveyor to Lloyd's Register

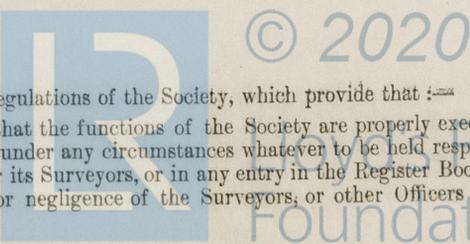

This Certificate is issued upon the terms of the Rules and Regulations of the Society, which provide that:—  
“While the Committee use their best endeavours to ensure that the functions of the Society are properly executed, it is to be understood that neither the Committee nor the Society are under any circumstances whatever to be held responsible for inaccuracy in any report or certificate issued by the Society or its Surveyors, or in any entry in the Register Book or other publication of the Society, or for any error of judgment, default, or negligence of the Surveyors, or other Officers or Agents of the Society.”