

VERIFICATION REPORT

FORM No. 9 ATTACHED

STANDARD "A"

Index No. APR 1919
(For London Office only.)

24597

Lloyd's Register of Shipping.
SURVEYS FOR FREEBOARD.—STEAM SHIPS.

SUNDERLAND RPT. NO. 2747

PARTICULARS RELATING TO STEAM SHIPS EITHER FLUSH DECKED, OR WITH TOP GALLANT FORECASTLES, SHORT POOPS AND BRIDGE HOUSES DISCONNECTED, OR WITH TOP GALLANT FORECASTLES HAVING LONG POOPS, OR RAISED QUARTER DECKS CONNECTED WITH BRIDGE HOUSES, OR OTHERWISE.

Messrs May & Son Ltd. No. 530

Port of Survey SUNDERLAND
Date of Survey APRIL 2nd 1919
Name of Surveyor T. S. LEATHAGE

Ship's Name.	Port of Registry and Nationality.	Official Number.	Gross Tonnage.	Date of Build.	Particulars of Classification.
S.S. "Hamerello" ex "W.M. Balsam" 193	Glasgow London BRITISH.	141900.	5292.	1919	+100.A.I. "Steel (CONTENDED)

Registered dimensions from Ship's Register.	LENGTH.	BREADTH.	DEPTH.	UNDER DECK TONNAGE.
	400.0	52.4	28.5	4821.98
Length on LOADLINE.	399.5	Frame Depth $\frac{1}{2}$ Rule $\frac{6}{5\frac{1}{2}}$	Ceiling $\frac{7}{8} + .20$ Sheer $+ 1.19$	Peak } INCLUDED Tanks }
		$5\frac{1}{2} \times 2 = .92$	MANK LEVEL No sagging + .23	

CORRECTED DIMENSIONS. 399.5 51.81 29.89 4821.98

Co-efficient of fineness.....

78

Any modification necessary
[Para. 4 (a) to (e)]*

- .02 Cen. D. Bottom

Co-efficient as corrected

76

Sheer { Stem 120 } $182 \div 2 = 91$ Mean $\frac{49.5}{55} = 90.0$
at Sternpost ... 62 }

Sheer at $\frac{1}{2}$ of the length from { Stem 66 } $99 \div 2 = 49.5$ Mean
Sternpost 33 }

Gradual mean Sheer 90.0

Standard mean Sheer [Table, Para. 18] 49.95 Correction

Difference $40.05 \div 4 = 10$

§ If limited as Para. 18 (f) - 10

Rise in Sheer { At front of bridge house
from amidships } At after end of forecastle

¶ Fall in Sheer { NO SAG IN SHEER $\frac{1}{2}$
Para. 18 (d) } $\div 2 =$

Length uncovered Correction

ALLOWANCE FOR DECK ERECTIONS :—

Freeboard, Table C.....

4.9%

Correction for Length, if required (Para. 12, 18, and 14)

+ 2 1/4

Freeboard by Table A. corrected for sheer, and for length,
if required (Para. 12, 18, and 14)

4.11 1/4

Difference

7.6%

Percentage as below.....

2.5 3/4

32.16

9.57

Correction for R. Q. Dk. if engine and boiler openings not
covered by bridge house (Para. 11)

- 9 1/2

Allowance for Deck Erections

Length.

Length allowed.

Height.

Forecastle 38.75 38.75 8.0

Bridge House 112.66 112.66 8.0

† Raised Qr. Dk.

Poop 49.25 49.25 8.0

Total 200.66 200.66 80.2

Length of Ship 399.5

Corresponding percentage { 32.16 %

FREEBOARD recommended amidships from centre of Disc to top of Statutory Deck Line, Wood (Iron) Deck :—

Fresh Water Line above centre of Disc

Indian Summer Line " " "

Winter Line below " "

Winter North Atlantic Line " "

the frames, skin planking, or ceiling are of unusual thickness the breadth of vessel to inside of ceiling should be reported if possible.
In vessels obtaining an allowance for deck erections under Para. 11 where the sheer drops abeam amidships the height of the R.Q.D. is to be taken from the level of the top of the amidship beam.
Iniced vessels the total standard mean sheer means the sheer measured at the stem and stern-post. Iniced vessels having poops and forecastles, it means the sheer measured at points distant one eighth of the vessel's length from stem and stern-post.

Winter Freeboard 6.6 1/4
Summer Freeboard 6.0 1/4
Indian Summer Freeboard 5.7 1/4
N. A. Winter Freeboard —


Correction necessary because clearside amidships, measured in accordance with the Statute is not taken at the intersection of the wood or iron deck with side. 1/2

Winter Freeboard from deck line 6.7 3/4
Summer " " " 6.2 1/4
Indian Summer " " " 5.8 3/4

N. A. Winter " " " 6.2

State dimensions of freeing port area on back of this form.

The Surveyor should state whether the fall in sheer as reported is measured relatively to the straight line of keel or to the water line. If measured relatively to water line the vessel's draft at time of survey, and also the usual load draft forward and aft should be reported.



Lloyd's Register
Foundation

W10004

Do all the Frames extend to the top height in the Poop? Yes
 Raised Quarter Deck? ✓
 Bridge House? Yes
 Forecastle? Yes
 To what height do the Reverse Frames extend? Upper Deck
 Has the Poop or Raised Quarter Deck an efficient Iron Bulkhead at the fore end? Yes
 Give particulars of the means for closing the openings in Bulkhead No openings
 Is the Poop or Raised Quarter Deck connected with the Bridge House? No
 Has the Bridge House an efficient Bulkhead at the fore end? Yes
 Give particulars of the means for closing the openings in Bulkhead No openings
 What is the thickness of the Bridge Front plating? .40 and Coaming plate? .44
 Give scantlings and spacing of the Stiffeners 3 ANGLES 9x3½x.40 SPACED 30°
 Are bracket plates fitted at each end of the Stiffeners? Yes
 Are hor'l. brackets fitted connecting Bridge Bulk'd. with Bulwarks? Yes
 Has the Bridge House an efficient Iron Bulkhead at the after end? Yes
 How are the openings closed? Stays & stays full height in plated channels
 Is the Forecastle at least as high as the main or top-gallant rail? Yes
 Has the Forecastle an efficient Iron or Wood Bulk'd. at after end? Yes
 Are the Engine and Boiler openings covered by a Bridge, Poop, Raised Quarter Deck, or enclosed by a Strong Iron or Steel Deckhouse? Yes
 If the openings are not so protected are the exposed parts of the Casings efficiently constructed?
 Give thickness of plating; scantlings and spacing of Stiffeners
 What is the height of the exposed Casings? 7.6
 Are suitable means provided for closing all openings in them in bad weather? Yes
 Are the Weather Deck Hatchways efficiently constructed and at least equal to the requirements of Section 28 of the Rules for 1904-5? Give particulars below:— Yes

Position and Size.		No. 1. 32'6" x 20'0	No. 2. 34'8" x 20'0	No. 3. 34'8" x 20'0	No. 4. 26'2" x 20'0			Ship.	Rule.
COAMING	Item.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.
SHIFTING BEAMS OR WEB PLATES.	Thickness	'30	'30	'30	'30	'30	'30	'30	'30
	Sides.....	.44	.44	.44	.44	.44	.44	.44	.44
	Ends.....	.44	.44	.44	.44	.44	.44	.44	.44
* FORE AND AFTERS.	Number	6	6	6	6	6	5	5	
	Section and Scantlings	I Plate 18x3½x36 4 angles 6x3½x40				SAYE NO 1			
	Material								
HATCHES	Thickness	2½	2½	2½	2½	2½	2½	2½	2½
	Remarks	SATISFACTORY							

* The depth of Fore and Afters should be stated from the underside of the hatches in all cases.

(If the sill of the lowest side scuttle will be less than 6 inches above the Indian Summer Load Line if assigned under the tables, state vertical distance from top of deck at side amidships to lower edge of lowest side scuttle.)

The following information is to be given in all Cases of vessels dealt with under Paras. 11, 12 (under 15 feet Moulded depth) and under Shelter Deck Rules.

What is the thickness of the Bridge Sheerstrake? Strake between Main and Bridge Sheerstrakes?


Delete the words { The Crew are, are not, berthed in the bridge house.
that do not apply { The arrangements to enable them to get backwards and forwards from their quarters are, are not satisfactory.

Length of Bulwarks in well

Area of Freeing Ports required by Para. 11 (e) each side of vessel = Sq. ft.

Ft. Tenths.	Ft. Tenths.	No.	Freeing Ports (each side of vessel)	=	Sq. ft.
x	x				
x	x				

Total deficiency or excess = Sq. ft.

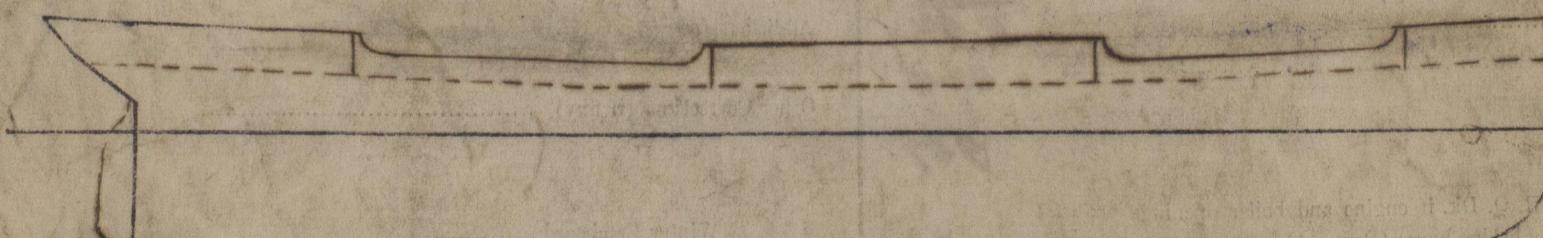

Show hereon line of Floors or Tank Top with position of any Breaks in same; also height of Peak Tank tops, &c., &c.

State any special features in the construction of the Vessel, Displacement 11478 Tons @ 25-298 draft

41.57 Tons per inch

J. S. Ranchard

Owners

Address

Fine £ 7 : 7 : 0

Received by me

10/6/18 R.H.L.

© 2020



Lloyd's Register
Foundation