

Register of Foreign Shipping. SURVEYS, FOR FOREIGN STEAM SHIPS.

19201

MON. 17 JUN 1907

PARTICULARS RELATING TO ALL STEAM SHIPS EITHER FLUSH DECKED, OR WITH FORECASTLES, SHORT POOPS AND BRIDGE HOUSES DISCONNECTED, OR WITH FORECASTLES HAVING LONG POOPS, OR RAISED QUARTER DECKS CONNECTED WITH BRIDGE HOUSES, OR OTHERWISE.

Port of Survey *Copenhagen*
 Date of Survey *13th June 1907*
 Name of Surveyor *H. Sonne*

Ship's Name <i>St. Jan</i>	Port of Registry and Nationality <i>Copenhagen Danish</i>	Official Number	Gross Tonnage <i>about 2535</i>	Date of Build <i>1907</i>	Particulars of Classification <i>100 A1 (class contemplated)</i>
Number in Register Book					
Registered Dimensions from Ship's Register.	LENGTH <i>311.0</i>	BREADTH <i>40.7</i>	DEPTH <i>19.0</i>	UNDER DECK Tonnage <i>1786.82</i>	
Length on LOADLINE <i>310'-8"</i>	Frame Depth <i>6 1/2</i>	Coiling <i>2 1/2</i>	Peak <i>8.78</i>		
	Rule <i>5</i>	Sheer <i>18</i>	Tanks <i>1778.04</i>		
		<i>1 1/2 to tank top</i>	<i>19.46</i>		
CORRECTED DIMENSIONS.	<i>310.66</i>	<i>40.45</i>	<i>19.28</i>	<i>1795.6</i>	

Moulded Depth as measured *21'-9"*

NOTE. - If the depth is measured when vessel is afloat, the details of measurement should be reported.

CORRECTION FOR LENGTH.

Length of Ship on Loadline *310.66* *310'-8"*
 Length in Table *261* *261*
 Difference *49.66* *49'-8"*
 Correction for 10ft., Table A. *49.7* *1.2* Table C.
 x Difference divided by 10 *5.95* *10* (if required.)
 If 1/10ths length covered divide by 2 *2* *3"*

CORRECTION FOR IRON DECK.

Proportion covered, if less than 1/10ths length covered
 Thickness of usual wood deck, less stringer *3 1/2"*

CORRECTION FOR ROUND OF BEAM.

Breadth at Gunwale amidships *39.9*
 Round of Beam *10"*
 Normal round *10"*
 Difference *2*
 Proportion of Deck uncovered (Para. 19)

NOTE. - The round of beam should be reported on the full breadth of vessel at the gunwale.

Co-efficient of fineness *0.74*
 Any modification necessary [Para. 4 (a) to (e) *] *Cell 103*
 Co-efficient as corrected *0.72*

Sheer { Stem... *61"* } *88* ÷ 2 = *44* ... Mean
 at { Sternpost... *27* }
 Sheer at 1/4 of the length from { Stem *27* } *38* ÷ 2 = *19* ... Mean
 { Sternpost *11* }
 Gradual mean Sheer *34.54*
 Standard mean Sheer (Table, Para. 18) *41.06* Correction
 Difference *6.52* ÷ 4 = *1 3/4*
 § If limited as Para. 18 (f) *+ 1 3/4*

Rise in Sheer { At front of bridge house... *5 1/2"*
 from amidships { }
 [Para. 18 (e)] { At after end of forecastle... *30 1/2"*

Fall in sheer { } ÷ 2 =
 Para. 18 (d) { }
 Length uncovered Correction

ALLOWANCE FOR DECK ERECTIONS:—

Freeboard, Table C. *1'-8"*
 Correction for Length, if required (Para. 12, 13, and 14)
 Freeboard by Table A, corrected for sheer, and for length, *4'-8 3/4"*
 if required (Para. 12, 13, and 14)
 Difference *2'-8 3/4"*
 Percentage as below *68.5%* *68.5%*
31'-68.5% = 21'
 Correction for R. Q. Dk. if engine and boiler openings not covered by bridge house (Para. 11)
 Allowance for Deck Erections *1'-8 10/16"*

	Length.	Length allowed.	Height.
Forecastle	<i>33'-0"</i>	<i>33</i>	
Bridge House			
Raised Qr. Dk.			<i>8'-0"</i>
Op.	<i>213'-0"</i>	<i>213</i>	
Total		<i>246</i>	<i>79</i>
Length of Ship		<i>310.66</i>	<i>100</i>
Corresponding percentage		<i>68%</i>	<i>68.5%</i>
Para. 11, 12, 13, or 14			

FREEBOARD recommended amidships from centre of Disc to top of Statutory Deck Line, Wood (Iron) Deck:—

	Fresh Water Line	above centre of Disc	
Indian Summer Line	"	"	
Winter Line	below	"	
Winter North Atlantic Line	"	"	

Winter Freeboard *2'-5 3/4"*
 Summer Freeboard *2'-8 1/2"*
 Indian Summer Freeboard *1'-8 1/2"* *10 3/4"*
 N. A. Winter Freeboard *2'-7 1/2"* *3 1/4"*
 Correction necessary because clearside amidships, measured in accordance with the Statute, is not taken at the intersection of the wood or iron deck with side. *1 1/2"*

Winter Freeboard from deck line *2'-8 1/2"* *7 1/4"*
 Summer " " " *2'-11 1/2"* *3 3/4"*
 Indian Summer " " " *2'-8 1/2"* *0 1/4"*
 N. A. Winter, " " " *2'-8 1/2"* *9 1/4"*

Attended Tables
 March, 1906

† State dimensions of freeing port area on back of this form.
 ‡ The Surveyor should state whether the fall in sheer as reported is measured relatively to the straight line or keel or to the water line. If measured relatively to water line, the vessel's draft at time of survey, and also the usual load draft forward and aft, should be reported.

W1004-0130

19.6.07

13

2024/10

Register of Foreign Shipping

REPORT

P.T.O.

JUL 1907

Do all the Frames extend to the top height in the Poop? *yes*
 To what height do the Reverse Frames extend? *no openings*
 Has the Poop or Raised Quarter Deck an efficient Iron Bulkhead? *yes*
 Give particulars of the means for closing the openings in Bulkhead *no openings*
 Is the Poop or Raised Quarter Deck connected with the Bridge House? *Long poop* Has the Bridge House an efficient Bulkhead at the fore end? *yes*
 Give particulars of the means for closing the openings in Bulkhead *no openings*
 What is the thickness of the Bridge Front plating? *7/20"* and Coaming plate? *18" x 8/20"*
 Give scantlings and spacing of the Stiffeners *7" x 3 1/2" + 1 1/2" bull angles 2'-6" apart*
 Are bracket plates fitted at each end of the Stiffeners? *yes* Are hor'l. brackets fitted connecting Bridge Bulk'd. with Bulwarks? *yes*
 Has the Bridge House an efficient Iron Bulkhead at the after end? *Long poop*
 How are the openings closed? *no openings*
 Is the Forecastle at least as high as the main or top-gallant rail? *yes* Has the Forecastle an efficient Iron ~~or Wood~~ Bulk'd. at after end? *yes*
 Are the Engine and Boiler openings covered by a Bridge, Poop, Raised Quarter Deck, or enclosed by a Strong Iron or Steel Deckhouse? *yes*
 If the openings are not so protected are the exposed parts of the Casings efficiently constructed? *yes*
 Give thickness of plating; scantlings and spacing of Stiffeners *Side plating 9/20" coaming plates 18" x 7/20" Stiffeners 3' x 2 1/2" + 1 1/2" + 1 1/2" + 1 1/2"*
 What is the height of the exposed Casings? *7'-6" above Bulkhead* Are suitable means provided for closing all openings in them in bad weather? *yes*
 Are the Weather Deck Hatchways efficiently constructed and at least equal to the requirements of Section 28 of the Rules for 1904-5? Give particulars below:— *yes*



Are the Weather Deck Hatchways in Accordance with the requirements of Section 28 of the Rules for 1904-5? Give particulars below:—												
Position and Size.		Fore hatch		Main hatch		After main hatch		After hatch		Ship.	Rule.	
Item.		Ship. 18 x 14	Rule.	Ship. 17 x 14	Rule.	Ship. 20 x 14	Rule.	Ship. 20 x 14	Rule.			
COAMING.	Height above top of DECK	3'-3"	30	3'-3"	30	2'-10"	18	2'-10"	18			
	Thickness {	Sides.....	9/20"	9/20	9/20"	9/20	9/20"	9/20	9/20"	9/20		
		Ends.....	8/20"	8/20	8/20"	8/20	8/20"	8/20	8/20"	8/20		
SHIFTING BEAMS OR WEB PLATES.	Number	1	1 web	2	2 webs	1	1 web	1	1 web			
	Section and Scantlings.....	3 x 3 x 7/20		3 x 3 x 7/20		3 x 3 x 7/20		3 x 3 x 7/20				
			8/20		8/20		8/20		8/20			
			4 x 4 x 7/20		4 x 4 x 7/20		4 x 4 x 7/20		4 x 4 x 7/20			
	Material.....	Steel		Steel		Steel		Steel				
FORE AND AFTERS.	Number.....	3.	3	3	3	3.	3	3.	3			
	Section and Scantlings.....	7" x 6"		7" x 6"		7" x 6"		7" x 6"				
			Material.....	Pitch pine		Pitch pine		Pitch pine		Pitch pine		
HATCHES Thickness		2 1/2"		2 1/2"		2 1/2"		2 1/2"				
Remarks.....												

* When the Fore and Afters are of wood the depth should be stated from the underside of the hatches. 7"
 (If the sill of the lowest side scuttle will be less than 6 inches above the Indian Summer Load Line if assigned under the tables, state vertical distance from top of deck at side amidships to lower edge of lowest side scuttle.)

The following information is to be given in all Cases of vessels dealt with under Paras. 11, 12 (under 15 feet moulded depth) and under Shelter Deck Rules.
 What is the thickness of the ~~Bridge~~ Sheerstrake? *1 1/2" f. 1 1/2" a. 7/20"* Strake between Main and Bridge Sheerstrakes? *1 1/2" f. 1 1/2" a. 7/20"*

Delete the words { The Crew ~~are~~, are not, berthed in the bridge house. }
 that do not apply { The arrangements to enable them to get backwards and forwards from their quarters are, ~~are not~~ satisfactory }

Length of Bulwarks in well *65'-0" by 66* = *12.89* Sq. ft.
 Area of Freeing Ports required by Para. 11 (e) each side of vessel = *13.5* Sq. ft.
 Ft. Tenths. Ft. Tenths. No. } Freeing Ports (each side of vessel) = *13.5* Sq. ft.
3.0 x 1.5 x 3
 Total deficiency or excess = *1.56* Sq. ft.

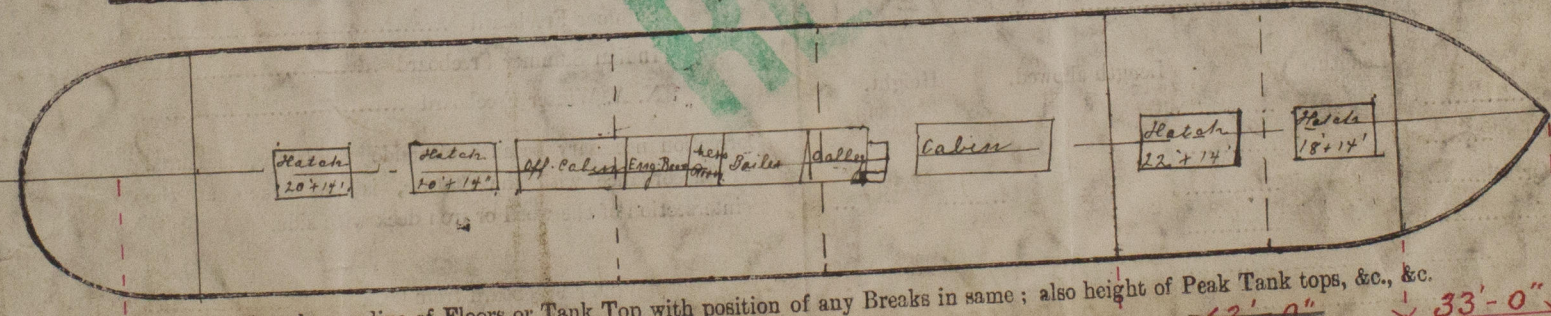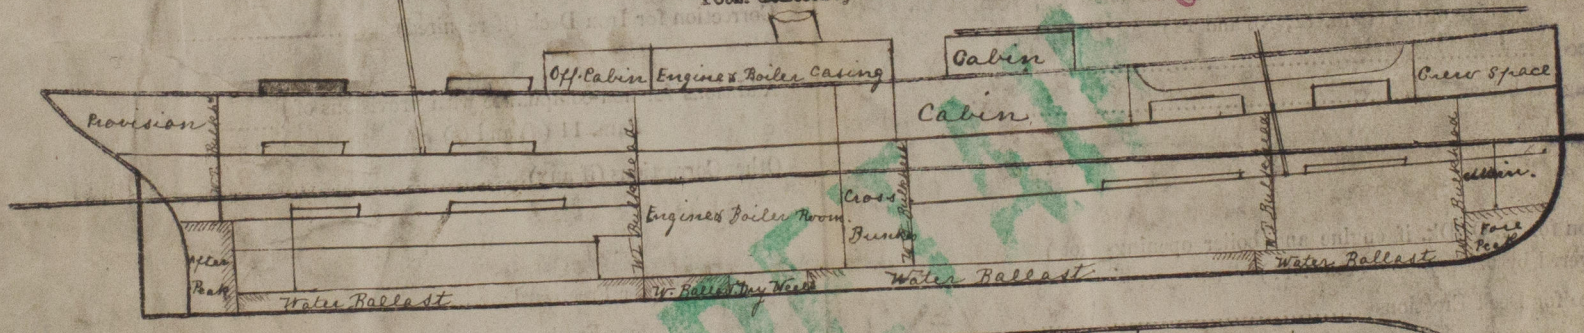

Show hereon line of Floors or Tank Top with position of any Breaks in same; also height of Peak Tank tops, &c., &c.
213'-0" * *63'-0"* * *33'-0"*
 State any special features in the construction of the Vessel

Owners *Skipselskabet Det Ostasiatiske Kompagni*
 Address *Copenhagen*
 Received by me *197/07*
 Lloyd's Register Foundation