

Lloyd's Register of Shipping.

SURVEYS FOR FREEBOARD.

(CONDITIONS OF ASSIGNMENT.)

11 DEC 1943
Index No. 37468
(For London Office only).

EMPIRE PIKE

Ship's Name **"RIDING MOUNTAIN PARK"**
EX DREDGE "FIELDING"

Port of Survey **SAINT JOHN, N.B.**


Official Number **NOT AVAILABLE**

Surveyor's Signature **R. M. Scott**

Nationality and Port of Registry **CANADIAN, MONTREAL**

Date of Survey **DURING CONVERSION**

Disposition and dimensions of superstructures, trunks, deckhouses and machinery casings to be inserted in the diagrams and tabular statement:—

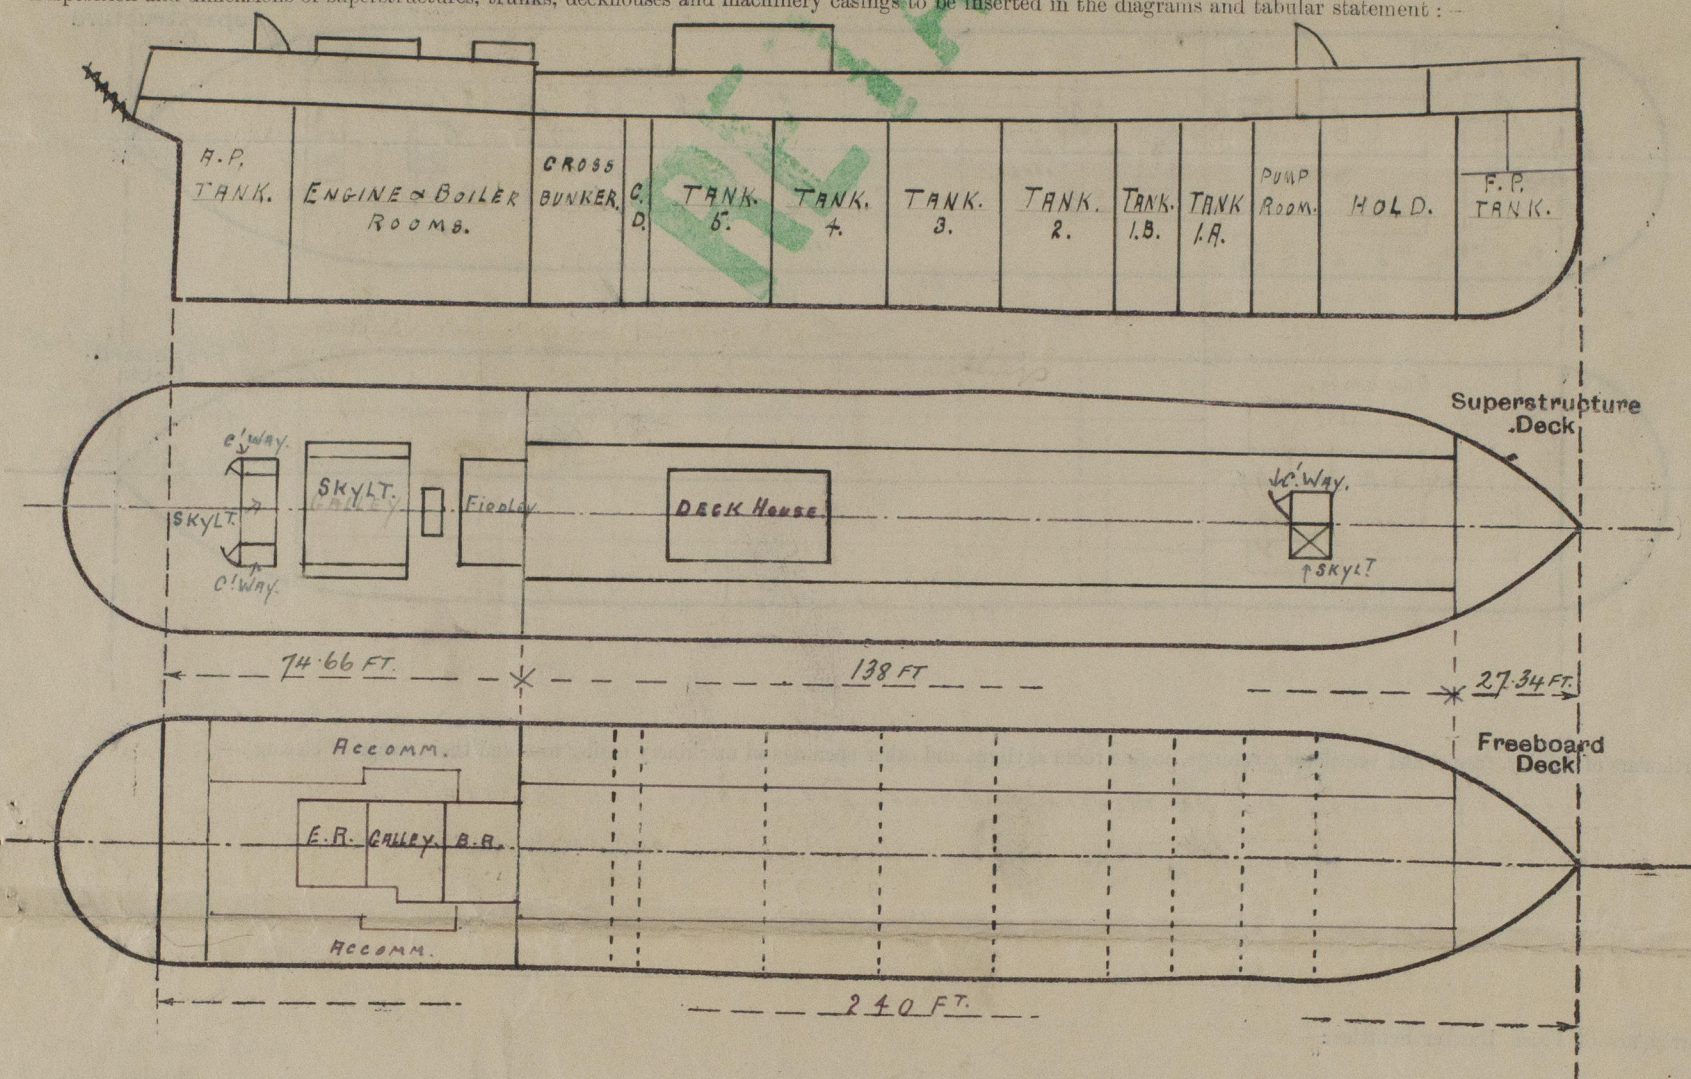

Particulars of Superstructures, Trunks, Casings, Deckhouses.

	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height of Casings
Poop Bulkhead ...	✓	.33	7' x 3' x 3/16 O.A.	27	hugged at top and bottom	NO OPENINGS.	✓	8'-3"
Raised Quarter Deck Bulkhead ...	✓							
Bridge, After Bulkhead ...	✓							
Bridge, Forward Bulkhead ...	✓							
Forecastle Bulkhead ...	✓	.30	3 1/2' x 3' x 5/16 O.A.	2'-2"	Bracket at top only, takes thro rivet in deck angle at bottom	5'-6" x 2'-0"	15"	7'-6"
Trunk, Aft ...	✓	.34	7' x 3' x 3/4 B.A.	2'-6"	Brkts at bulkd.	none	✓	7'-6"
Trunk, Forward ...								
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	✓							
Exposed Machinery Casings on Superstructure Decks ...								
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...								
Deckhouses on Flush Deck Ships ...								

Particulars of Closing Appliances (state if capable of being manipulated from both sides).

Poop Bulkhead ...	NO OPENINGS.	✓
Raised Quarter Deck Bulkhead ...	✓	
Bridge, After Bulkhead ...	✓	
Bridge, Forward Bulkhead ...	✓	
Forecastle Bulkhead ...	HINGED STEEL W.T. DOORS. CAPABLE OF BEING MANIPULATED FROM BOTH SIDES.	✓
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	✓	
Exposed Machinery Casings on Superstructure Decks ...	NO OPENINGS.	✓
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	✓	
Deckhouses on Flush Deck Ships ...	✓	

The plan shows the layout of the ship's decks. The **Superstructure Deck** (top) includes the following areas from bow to stern: R.P. TANK, ENGINE & BOILER ROOMS, CROSS BUNKER, DECK HOUSE, and five TANKS numbered 5, 4, 3, 2, and 1B. It also features a PUMP ROOM, HOLD, and a section with L.K.R. STORE and F.P. TANK. The **Freeboard Deck** (bottom) shows ACCOMM. (accommodation) spaces at both ends, a central E.R. (engine room) and B.R. (boiler room) section, and a SKYT. (skylight) area. The ship's name, **H.M.S. 'Albatross'**, is written at the bow.

FIDDLEY, FUNNEL AND VENTILATOR COAMINGS EFFICIENTLY CONSTRUCTED.

ENGINE ROOM SKYLIGHT OF STEEL WITH HINGED COVERS. AND CIRCULAR GLASSES.

NONE.

Particulars of Companion doors:—
 Door D.S.:— 4'-0" F.S.A. x 12'-0" wide x 5'-6" high (R.S.D.), $\frac{1}{4}$ " steel plates with opening 4'-6" x 2'-0" - sill ^{24"} ~~8'~~ having hinged wood doors capable of being manipulated both sides. Centre portion 2'-9" high forming skylight with hinged steel covers and circular glass lights.
 TRUNK T.O.P.:— 6'-0" F.S.A. x 7'-0" wide x 5'-6" high built of $\frac{1}{4}$ " steel plates with opening at aft end 4'-0" x 2'-0" - ^{24"} ~~8'~~ sill having hinged steel doors capable of being manipulated both sides (combined skylight on starbd. side with 2 hinged steel covers and glass lights.)

POOP DECK: 2 @ 36 dia. x 1/4" thick x 6'-9" high to stockhold (existing) - coaming suitably stiffened.
2 @ 18" dia. x 3/8" " x 3'-0" " " Engine Room
2 @ 9" dia x 3/8" " x 2'-6" " " Galley.
2 @ 12" dia x 3/8" " x 2'-6" " " Toilets.
FORECASTLE DECK: 2 @ 12" dia x 3/8" " x 3'-0" " " Forecastle space.
EXPANSION TRUNK TOP: 2 @ 22" dia. x 1/4" " x 2'-6" " " Pump Room

18⁴

POOP DECK:- 1 P.R.S. - 3" dia. 18" to opening to aft peak
1 P.R.S. - 2 1/2" - 18" - " - Fed Tank in Engine Room.

F'CLE DECK:- 1 - 3" - 18" - " - Fore Peak Tank.

✓

(4)

NONE.

Upper Deck - 1 P.&S. fwd. - 3" dia. } led through stinger and ships side below upper dk - open ends.
1 P.&S. aft - 4" " }
2' and 4" sanitary discharge pipes led through ships side above gunboard deck with trap at inner end.

Poop space: 12' dia. with hinged deadlights. ✓
 Forecastle space: 9' " " " "

Vertical distance of Sill of lowest Side Scuttle above top of keel *all side scuttles above Inboard Deck.*

Upper dock } 36" high with 2 rows of rails ✓
 Pool & Joncasle }
 Joncasle BK also has 30 steel buttwark 36" high stayed with stanchions spaced about 5 ft. apart.

Lifelines, etc. :-

4'-9"

6" x 2 1/2" plank bolted to structure.

8" x 2 1/2" planks

20"

3" x 1" flat bar placed about 7 ft. apart

28"

Gangway full length of expansion trunk.

Particulars of Freeing Arrangements.						
	Length of Bulwark	Height of Bulwark	Size of Freeing Ports	Number each side	Area each side	Rule area each side
After Well }	<i>open rails.</i> ✓					
Forward Well }						
State position of each freeing port { After Well :— (F. and A. position and height above deck edge) { Forward Well :— <i>none.</i>						
State whether the freeing ports are fitted with shutters, bars, or rails, and give particulars of such :—						
Additional area where sheer is less than standard.						

PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS.									
<div style="display: flex; justify-content: space-between; font-size: small;"> EXP. TOP POOP OK. INSIDE FOCLE. </div>									
Description of Hatchway	O.T. HATCHES TO CARGO TANKS	O.T. HATCH TO C. DAM.	W.T. HATCH TO HOLD.	CROSS BUNKER HATCH.	SMALL COAL HATCH P.S.	SMALL HATCH INSIDE FOCLE			
Dimensions of Hatchway	36" DIA	24" DIA	6' x 7' 0"	4' 0" x 8' 0"	4' 0" x 3' 0"	2' 0" x 2' 6"			
COAMINGS	Height above Deck	30"	30"	30"	30"	30"	9" PA.		
	Thickness	3/8" ✓	3/8"	5/8"	3/8"	3/8"	Coaming		
	Stiffeners	✓	✓	✓	✓	✓	✓		
	Brackets, Stays	✓	✓	✓	✓	✓	✓		
HATCH BEAMS	Number								
	Spacing and Sketch								
FORE AND AFTERS	Number								
	Spacing and Sketch								
HATCH COVERS	Material	HINGED STEEL O.T.	HINGED STEEL W.T.	HINGED STEEL	SPRUCE 2 1/2"	SPRUCE 2 1/2"	SPRUCE 2 1/2"		
	Thickness	COVER	COVER	COVER	2 1/2"	2 1/2"	2 1/2"		
	How fitted	TURNBUCKLES	TURNBUCKLE	TURNBUCKLE	3"	3"	2 1/2"		
	Bearing Surface								
Spacing of Cleats				24"	✓	✓	✓		
Number of Tarpaulins	NONE	NONE	NONE	2	2	1			
<p>*Are wood fore and afters steel shod at all bearing surfaces? <i>NONE.</i></p> <p>Are battens and wedges efficient and in good condition? <i>YES.</i></p> <p>Are tarpaulins in good condition and in accordance with rule requirements? <i>YES.</i></p> <p>Are lashings provided in accordance with rule requirements? <i>NONE.</i></p>									

Particulars of any special features:—

This vessel was originally a self propelled Bucket Dredger with Hopper and has been converted into an oil tanker.

Endorsement at first survey and at surveys for renewal of Certificate:—

The fittings and appliances are in accordance with the particulars shown on this form (or as now modified) and are in good condition.



© 2020

Lloyd's Register Foundation