

APPLEBY IRON COMPANY, LTD., SCUNTHORPE, LINGS.

15450

Customer Amos & Smith Sd Huce

Date 16-8-34

Builder

Mark or Job No.

Customer's Order No. 50951

Works Order No. A 775 404

Boiler
REQUIREMENTS
4 Blanking

TENSILE—Tons per sq. inch 26/30

ELONGATION—per cent

CONTRACTION OF AREA—per cent

ELASTIC LIMIT—
per sq. inch or per cent


Batch No. 2/13

Inspection Lloyd's

We hereby certify that the material described below has been made by the Open Hearth process, and is that which has been satisfactorily tested in the presence of the Surveyor, in accordance with the rules of Lloyd's Register.

Initials of Test House Manager T. W. E.

PLATE No.	CAST MARK	POSITION	PLATE MARK	PIECES CUT	SIZE	THICK-NESS	APPROX. WEIGHT				REMARKS
							T.	c.	q.	lbs.	
<u>B673</u>	<u>25342</u>		<u>639</u> K.	1 ✓	10-3 1/2 x 52 1/2	7/8	14	1	11		Centre Back Tube
				20 ✓	11 1/2 Dia	—	4	2	11		Plain Stay Washers
<u>745</u>	<u>25329</u>		F	1 ✓	40 SAEAR	1 1/4	1	7	2	22	Front Top
<u>746</u>			G	1 ✓	6-11 x 36	3/4	5	2	19		Wing CC Top
			R	2 ✓	16-5 x —	—	1	6	3	18	Wing CC Bottom
<u>747</u>			O	1 ✓	7-8 x —	1 1/16	5	3	1		Centre CC Top
			P	2 ✓	18-3 x —	—	1	7	1	20	Centre CC Bottom
<u>672</u>	<u>25314</u>		T.	1 ✓	10-5 x 40	3/4	9	1	26		Donut Shell.

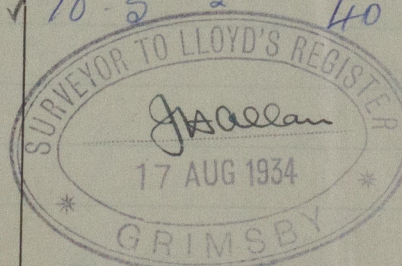

© 2020

Lloyd's Register
Foundation

W1035-0176