

Rpt. 12.

COPY.

# FREEBOARD VERIFICATION FORM FOR STEAMERS.

Port YOKOHAMA. When received in London Office

Vessel's Name "RAKUYO MARU".

Official No. \_\_\_\_\_ No. in Reg. Book \_\_\_\_\_

Port of Registry (For Foreign Vessels) YOKOHAMA.

Iron or Steel Steel State whether Classed by Lloyd's Register Yes.

Name of Owners \_\_\_\_\_ Date of Verification 19th November, 1922.

I have to report that the Freeboard from the centre of disc to the top of the statutory deck line, and the lines in connection therewith, as given below, assigned by the Committee to this vessel, have been correctly marked on the vessel's sides, in accordance with the printed instructions:—

From centre of disc to top of statutory deck line	---	ft.	---	ins.	
From centre of disc to top of statutory deck line at <del>awning or part-awning</del> deck	10	ft.	8½	ins.	
Fresh Water line above centre of disc			7½	ins.	
Indian Summer line above centre of disc			---	ins.	
Winter line below centre of disc			3½	ins.	
Winter North Atlantic line below centre of disc			---	ins.	
Distance between the top of statutory deck line on vessel's side and the intersection of the continuation of upper side of wood <del>or iron</del> deck with the vessel's side	}	at main, spar or upper dk.		---	ins.
		at <del>awning or pt-awning</del> dk.		1¾	ins.

NOTE.—It should be clearly shown whether the statutory deck line is set off from a wood or iron deck.

Condition of class.

(Signed) JAMES CRICHTON. Surveyor.

(To be filled up in London Office.)

Statement No. \_\_\_\_\_ Date of Committee's Minute 3. 8. 21.

Particulars for record in Register Book.	}	Moulded Depth . . . . .	40	ft.	7	ins.
		Freeboard . . . . .	10	ft.	8½	ins.
		Corresponding Draught . . . . .	30	ft.	7	ins.


Freeboards compared and found correct by \_\_\_\_\_ Date \_\_\_\_\_

Is fee paid? \_\_\_\_\_ Form for Certificate \_\_\_\_\_

Instructions \_\_\_\_\_ Date \_\_\_\_\_

Certificate written \_\_\_\_\_ Noted for posting \_\_\_\_\_

2m, 11, 20.—T,

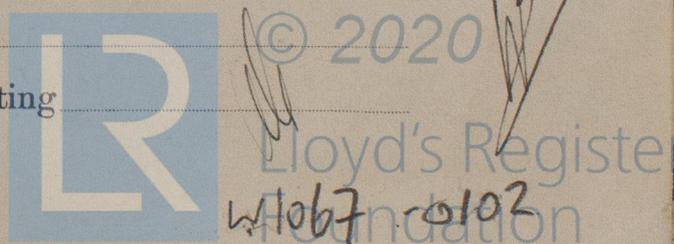

Angles on upper edge					Deck. Material and thickness	
Spacing	max	4'-6"	4'-6"		Forecastle Deck Stringer Plate, b'dth & th'kns	38
BEAMS. Forecastle Deck	0	71	50	0	71	50