

Rpt. 11b.

Verification

Report No. 546

Lloyd's Register of Shipping.

SURVEYS FOR FREEBOARD.—STEAM SHIPS. 25537.

PARTICULARS RELATING TO ALL STEAM SHIPS EITHER FLUSH DECKED, OR WITH TOP GALLANT FORECASTLES, SHORT POOPS AND BRIDGE HOUSES DISCONNECTED, OR TOP GALLANT FORECASTLES HAVING LONG POOPS, OR RAISED QUARTER DECKS CONNECTED WITH BRIDGE HOUSES, OR OTHERWISE.

*Skinner & Eddy Corp Renamed West-Haven
96-10 Ship's Name
"Var. Flame"*

Number in Register Book

Port of Registry
and Nationality.
*London
British*Official
Number.Gross
Tonnage.Date of Build.
1914

Particulars of Classification.

Port of Survey *Seattle, Wash*
Date of Survey *6th December 1914*
Name of Surveyor *John Whitehead*

Registered dimensions from Ship's Register.	LENGTH.	BREADTH.	DEPTH.	UNDER DECK TONNAGE.
	<i>409-6</i>	<i>54-2 1/2</i>	<i>27-1</i>	<i>5025-90</i>
Length on LOADLINE.	<i>410-45</i>	Frame Depth <i>9</i> Ceiling <i>5ft 6in</i> Peak F <i>30-49</i>		
		Rule <i>6</i> Sheer <i>+ 1-26</i> Tanks <i>AP105-34</i>		
		<i>3-2</i> <i>= 2 x 3 = -5</i> Drop in tank <i>4" + .16</i>		
CORRECTED DIMENSIONS.	<i>410-45</i>	<i>53-4</i>	<i>28-52</i>	<i>5171-73</i>

Co-efficient of fineness *.820 ✓*
Any modification necessary { *[Para. 4 (a) to (e)]* .02*
Co-efficient as corrected *.80 ✓*

Sheer { Stem *129* } *191 ÷ 2 = 95-5* Mean
at Sternpost *62*

Sheer at $\frac{1}{3}$ of the length from { Stem *73* } *106 ÷ 2 = 53* Mean
Sternpost *33* *55 1/2 = 96-36*

Gradual mean Sheer *96-36 - 95-5 = 95-93*

Standard mean Sheer [Table, Para. 18] *51-04 ✓* Correction
Difference *44-89 ÷ 4 = 11-22*
§ If limited as Para. 18 (f) *= 11 1/2*

Rise in Sheer { At front of bridge house ✓
from amidships { At after end of forecastle ✓

¶ Fall in Sheer { *÷ 2 =*
Para. 18 (d) ✓
Length uncovered ✓ Correction

ALLOWANCE FOR DECK ERECTIONS:

Freeboard, Table C.	<i>4-4 1/4</i> ✓
Correction for Length, if required (Para. 12, 13, and 14)	<i>+ 4 1/4</i> ✓
Freeboard by Table A. corrected for sheer, and for length, if required (Para. 12, 13, and 14)	<i>4-8 1/2</i> ✓
Difference	<i>7-4</i> ✓
Percentage as below	<i>2-4 1/2</i> ✓
	<i>32%</i> ✓
$\frac{31-5 \times 32}{100}$	<i>= 10-08</i>

Correction for R. Q. Dk. if engine and boiler openings not covered by bridge house (Para. 11) ✓

Allowance for Deck Erections *- 10" ✓*

	Length.	Length allowed.	Height.
Forecastle	<i>44-0</i>	<i>44-0</i> ✓	<i>8-0</i>
Bridge House	<i>114-45</i>	<i>114-45</i> ✓	<i>8-0</i>
† Raised Q. Dk.			
Poop	<i>43-50</i>	<i>43-50</i> ✓	<i>8-0</i>
Total		<i>205-25</i> ✓	<i>= 50</i> ✓

Length of Ship
Corresponding percentage { *(Para. 11, 12, 13, or 14)* *32%* ✓

FREEBOARD recommended amidships from centre of Disc to top of Statutory Deck Line, Wood (Iron) Deck:

Fresh Water Line	above centre of Disc	...
Indian Summer Line	" " "	...
Winter Line	below "	..."
Winter North Atlantic Line	" "	..."

* If the frames, skin planking, or ceiling are of unusual thickness the breadth of vessel to inside of ceiling should be reported.
† In vessels obtaining an allowance for deck erections under Para. 11 where the sheer drops abaft amidships the height of the R.Q.D. is to be taken from the level of the top of the amidship beam.
§ In flush-decked vessels the total standard mean sheer means the sheer measured at the stem and stern-post. In vessels having poops and forecastles, it means the sheer measured at points distant one eighth of the vessel's length from stem and stern-post.

112.16.T.

† State dimensions of freeing port area on back of this form.

The Surveyor should state whether the fall in sheer as reported is measured relatively to the straight line of keel or to the water line. If measured relatively to water line the vessel's draft at time of survey, and also the usual load draft forward and aft should be reported.

MARKING REPORT
RECEIVED 31.12.17.

WLR28-0065

2020 Lloyd's Register Foundation

Do all the Frames extend to the top height in the Poop?	<i>Yes</i>	Raised Quarter Deck?	<i>✓</i>	Bridge House?	<i>Yes</i>	Forecastle?	<i>Yes</i>	
To what height do the Reverse Frames extend?	<i>Channels, excepting peaks where they extend to Forecastle and upper decks alternately and all to upper deck in after peak.</i>							
Has the Poop or Raised Quarter Deck an efficient Iron Bulkhead at the fore end?	<i>Yes</i>							
Give particulars of the means for closing the openings in Bulkhead	<i>Steel hinged doors 5'-6" x 2'-6" (18" Coamings).</i>							
Is the Poop or Raised Quarter Deck connected with the Bridge House?	<i>No</i>	Has the Bridge House an efficient Bulkhead at the fore end?	<i>Yes</i>					
Give particulars of the means for closing the openings in Bulkhead	<i>Steel hinged doors 6'-0" x 4'-0" (15" Coaming)</i>							
What is the thickness of the Bridge Front plating?	<i>.42</i>	and Coaming plate?	<i>.42</i>					
Give scantlings and spacing of the Stiffeners	<i>10" x 3-6 x 3-6 x 30-6 lbs E @ 30" Spacing</i>							
Are bracket plates fitted at each end of the Stiffeners?	<i>Large Angle lugs</i>	Are hor'l. brackets fitted connecting Bridge Bulk'd. with Bulwarks?	<i>Yes</i>					
Has the Bridge House an efficient Iron Bulkhead at the after end?	<i>Yes</i>							
How are the openings closed?	<i>Portable steel plates secured with dog bolts 12" apart + Stormboards in riveted channels full height of opening</i>							
Is the Forecastle at least as high as the main or top-gallant rail?	<i>Yes</i>	Has the Forecastle an efficient Iron or Wood Bulk'd. at after end?	<i>Yes</i>					
Are the Engine and Boiler openings covered by a Bridge, Poop, Raised Quarter Deck or enclosed by a Strong Iron or Steel Deckhouse?	<i>By Bridgehouse</i>							
If the openings are not so protected are the exposed parts of the Casings efficiently constructed?	<i>✓</i>							
Give thickness of plating; scantlings and spacing of Stiffeners	<i>✓</i>							
What is the height of the exposed Casings?	<i>✓</i>	Are suitable means provided for closing all openings in them in bad weather?	<i>Yes</i>					
Are the Weather Deck Hatchways efficiently constructed and at least equal to the requirements of Section 28 of the Rules for 1904-5? Give particulars below:	<i>Yes</i>							
	<i>Shore Deck</i>	<i>Bridge Deck</i>	<i>After Deck</i>					
Position and Size.	<i>No 1 29-3 x 14-0"</i>	<i>No 2 31-6 x 17-0"</i>	<i>No 3 15-9 x 17-0"</i>	<i>No 4 29-3 x 17-0"</i>	<i>No 5 24-0 x 17-0"</i>			
Item.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.	Ship.	
COAMING.		<i>as approved</i>		<i>as approved</i>		<i>as approved</i>		
Height above top of DECK	<i>36"</i>	<i>36"</i>	<i>36"</i>	<i>36"</i>	<i>36"</i>	<i>36"</i>	<i>36"</i>	
Thickness { Sides.....	<i>.44</i>	<i>.44</i>	<i>.44</i>	<i>.44</i>	<i>.44</i>	<i>.44</i>	<i>.44</i>	
Thickness { Ends.....	<i>.44</i>	<i>.44</i>	<i>.44</i>	<i>.44</i>	<i>.44</i>	<i>.44</i>	<i>.44</i>	
SHIFTING BEAMS OR WEB PLATES.	Number	<i>5</i>	Number	<i>5</i>	Number	<i>5</i>	Number	<i>5</i>
	Section and Scantlings	<i>15" x .36 P 15" x .36</i>	Section and Scantlings	<i>15" x .36 P 15" x .36</i>	Section and Scantlings	<i>15" x .36 P 15" x .36</i>	Section and Scantlings	<i>15" x .36 P 15" x .36</i>
	Material	<i>Steel</i>	Material	<i>Steel</i>	Material	<i>Steel</i>	Material	<i>Steel</i>
* FORE AND AFTERS.	Number	<i>Nil</i>	Number	<i>Nil</i>	Number	<i>Nil</i>	Number	<i>Nil</i>
	Section and Scantlings		Section and Scantlings		Section and Scantlings		Section and Scantlings	
	Material		Material		Material		Material	
HATCHES Thickness	<i>3"</i>	<i>3"</i>	<i>3"</i>	<i>3"</i>	<i>3"</i>	<i>3"</i>	<i>3"</i>	
Remarks.....	<i>good</i>	<i>good</i>	<i>good</i>	<i>good</i>	<i>good</i>	<i>good</i>	<i>good</i>	

* The depth of Fore and Afters should be stated from the underside of the hatches in all cases.

(If the sill of the lowest side scuttle will be less than 6 inches above the Indian Summer Load Line if assigned under the tables, state vertical distance from top of deck at side amidships to lower edge of lowest side scuttle.)

The following information is to be given in all Cases of vessels dealt with under Paras. 11, 12 (under 15 feet Moulded depth) and under Shelter Deck Rules.

What is the thickness of the Bridge Sheerstrake?

Delete the words { The Crew are, are not, berthed in the bridge house.
that do not apply { The arrangements to enable them to get backwards and forwards from their quarters are, are not satisfactory.

Length of Bulwarks in well

Area of Freeing Ports required by Para. 11 (e) each side of vessel =

Sq. ft.

Ft. Tenths. Ft. Tenths. No.



x x
x x

Freeing Ports
(each side of vessel) =

Sq. ft.

Total deficiency or excess =

Sq. ft.

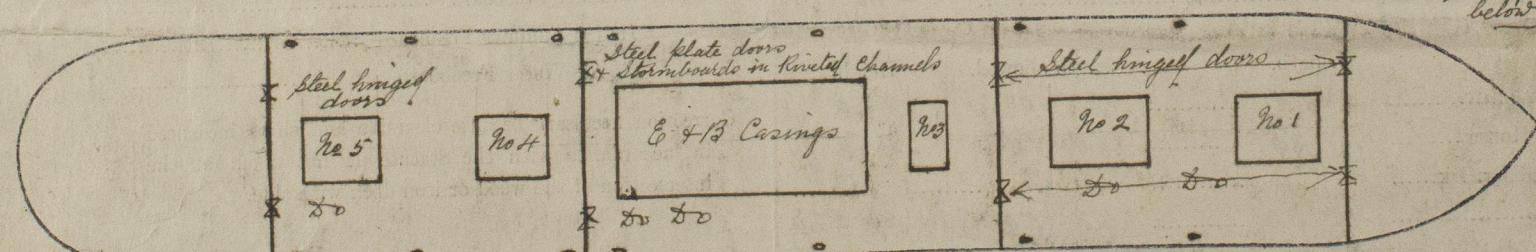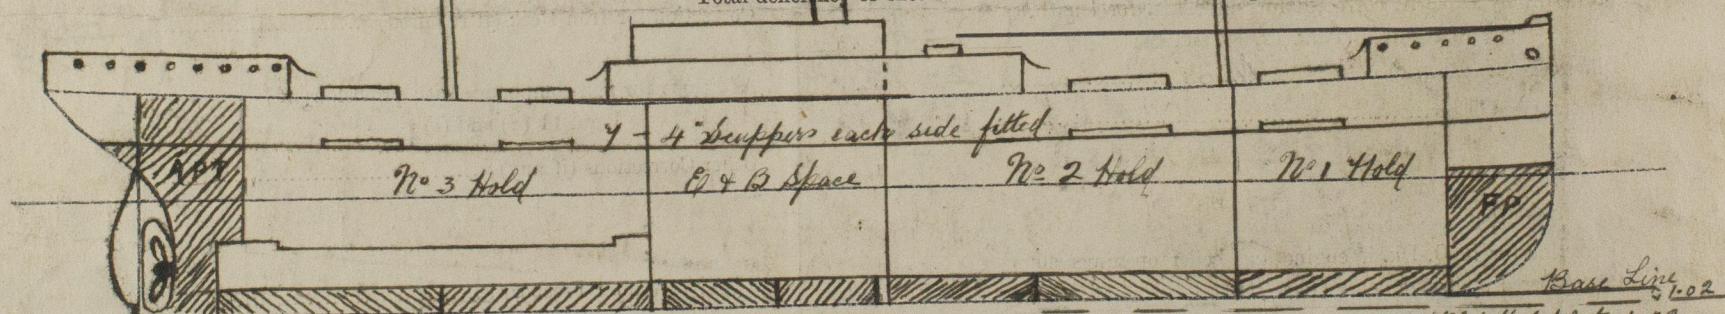

Show hereon line of Floors or Tank Top with position of any Breaks in same: also height of Peak Tank tops, &c., &c.

State any special features in the construction of the Vessel This vessel is constructed with a Forecastle, Bridge & poop decks and is a sister vessel to the steamer "Luise Nielsen" See Seattle freeboard report No 483 A request form is herewith attached.

Owners Cunard Steamship Co.
Address Liverpool England

Fee \$ 50.00

Received by me

© 2020



Lloyd's Register
Foundation