

Rpt. 6.

For the information of Surveyors and the Committee only.

Rpt. No. F 282

Received at Office 19

The words FORGINGS or CASTINGS, IRON or STEEL, should be struck out as may be required.



Lloyd's Register of Shipping.

(Report on Vessel No. 603 Port Hong Kong.)

No. SHIP FORGINGS OR CASTINGS

I have to report that the undermentioned Iron or Steel Forgings or Castings, manufactured by South China Iron Works of Hong Kong for the Vessel No. 603, being built by Messrs. Cheoy Lee Shipyard of Hong Kong, have been inspected by me as set forth below and found to be, so far as can be seen, sound and free from defect.

Mark on Forgings or Castings.

Lloyd's
No. 284
JAA May 8-53.

Lloyd's
No. 285
JAA May 8,53


James Alexander
18 June 1953

	STERN FRAME	RUDDER FRAME	"A" STEEL BRACKETS
Material*			Steel
How made			Cast
If annealed			Yes
Dimensions			-
Progress on Inspection			Rough cast & machined
Date when Inspected			8th May, 1953.
CASTINGS			
Tests on Standard Test Pieces			No.284 No.285
Tensile Test—			
Tons per square inch			35.0 34.6
Extension per cent.			27.1 29.2
Cold Bending Test—			
Angle before fracture			120° 120°
Drop Test—			
Height from ground			10 ft. 10 ft.
Hammering Test—			
If made according to Rules and found satisfactory			Yes Yes.

SKETCHES OF FRAMES SHOWING POSITION AND DESCRIPTION OF WELDS OF FORGINGS

Fee (if any chargeable) £ - : :
To be paid at

* If of Iron, state whether scrap or puddled Iron. If of Steel, state whether made on the Open Hearth process.

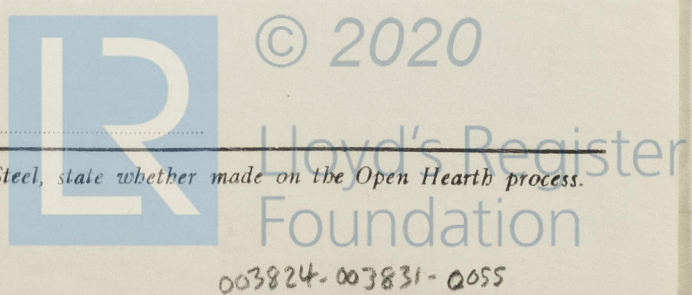

003824-003831-0055