

Lloyd's Register of Shipping.


SURVEYS FOR FREEBOARD.

(CONDITIONS OF ASSIGNMENT.)

No. 17978

Ship's Name *"ELMDENE"* Port of Survey *West Hartlepool*
 Official Number *(673)1* Surveyor's Signature *W J Craig*
 Nationality and Port of Registry *BRITISH LONDON* Date of Survey *whilst building*

Disposition and dimensions of superstructures, trunks, deckhouses and machinery casings to be inserted in the diagrams and tabular statement:—

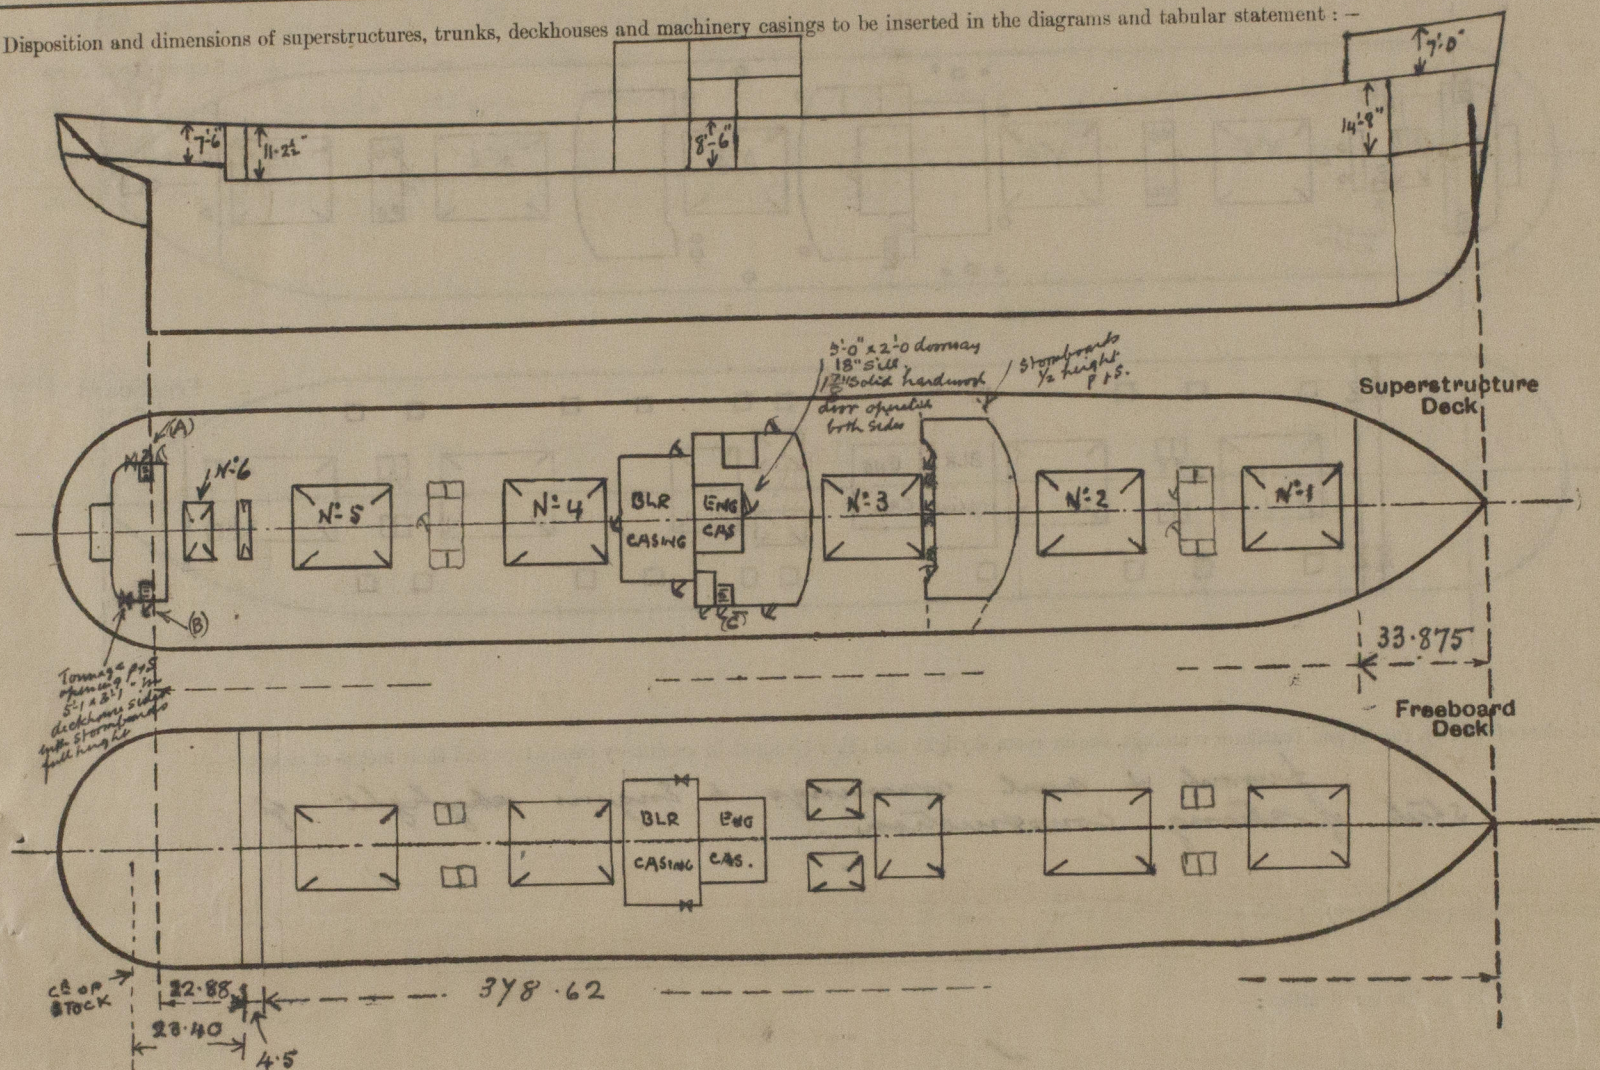

Particulars of Superstructures, Trunks, Casings, Deckhouses.

	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height of Casings
Poop Bulkhead ...	30 ✓	26 ✓	4 x 3 x 32 A	30"-32"	none	2 at 5'-1" x 3'-2"	18"	7'-6"
Raised Quarter Deck Bulkhead ...		28 ✓	5 x 3 x 34 4/8 A	27"-33"	none	2 at 5'-1" x 3'-2"	18"	11'-2"
Bridge, After Bulkhead ...	✓							
Bridge, Forward Bulkhead ...								
UPPER Forecastle Bulkhead ...	30 ✓	30 ✓	4 x 3 x 32 L	30" ✓	none ✓	1 at 5'-1" x 4'-1"	18" ✓	7'-0" ✓
Trunk, Aft ...				✓				
Trunk, Forward ...				✓				
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...				✓				
Exposed Machinery Casings on Superstructure Decks ...	34 ✓	30 ✓	6 x 3 x 38 A	20" 1/2 30"	continuous	3 at 5'-0" x 2'-0"	18" ✓	16'-0" ✓
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...		30 ✓	ENG 3 x 2 1/2 x 30 BLR 6 x 3 x 38 A	30" 20" 1/2 30"	continuous	2 at 3'-0" x 2'-0"	27" ✓	8'-6" ✓
SALOON Deckhouses on Flush Deck Ships ...	35" ✓	30 ✓	4 x 3 x 40 A	27" 1/2 36"	✓	4 at 5'-0" x 2'-0"	18" ✓	8'-0" ✓
MIDSHIP DECKHOUSE	35" ✓	25 ✓	3 x 2 1/2 x 30 A	24" 1/2 37"	✓	1 at 5'-0" x 3'-0"	18" ✓	7'-6" ✓
	35" ✓	25 ✓	4 x 3 x 32 A	28" 1/2 36"	✓	4 at 5'-0" x 2'-0"	18" ✓	7'-6" ✓

Particulars of Closing Appliances (state if capable of being manipulated from both sides).

Poop Bulkhead ...	3" Stormboards in riveted channels full height ✓
Raised Quarter Deck Bulkhead ...	
Bridge, After Bulkhead ...	3" Stormboards in riveted channels full height ✓
Bridge, Forward Bulkhead ...	
UPPER Forecastle Bulkhead ...	3 1/2" stormboards in riveted channels ✓
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	None ✓
Exposed Machinery Casings on Superstructure Decks ...	Hinged steel doors operated from both sides ✓
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	Sliding steel doors operated from one side ✓
SALOON Deckhouses on Flush Deck Ships ...	4-1 1/2" framed hinged hardwood doors with 1 1/2" panels all operated from both sides ✓
MIDSHIP DECKHOUSE	2-Hinged steel doors + 2-1 1/2" framed hardwood hinged doors 1 1/2" panels, all operated from both sides ✓

PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FOREBOARD AND SUPERSTRUCTURE DECKS.										4' cl deck
Description of Hatchway	20 fore Peak	N-1	N-2	N-3	N-4	N-5	N-6	Yonage hatch		50 Forecastle
Dimensions of Hatchway	4'0" x 5'0"	29'3" x 22'0"	32'6" x 22'0"	32'6" x 22'0"	30'0" x 22'0"	30'0" x 22'0"	9'0" x 16'0"	4'6" x 16'0"		4'0" x 2'6"
COAMINGS	Height above Deck ... Thickness { Sides ... Ends ... Stiffeners ... Brackets, Stays ...	31" 44" 44" 5 in 7/16 x 40 J A/E 2"	31" 44" 44" 5 in 7/16 x 40 J F.E. 7/16 x 40 J	31" 44" 44" 5 in 12/16 x 40 J 3	31" 44" 44" 5 in 7/16 x 40 J A/E 7/16 x 40 J	31" 44" 44" 5 in 7/16 x 40 J F.E. 7/16 x 40 J	31" 44" 44" 5 in 7/16 x 40 J F.E. 7/16 x 40 J	9 x 3 1/2 x 50 B.A. Gamin		30" 44" 44" ✓
HATCH BEAMS	Number ... Spacing ... Scantling and Sketch ... Bearing Surface ...	5 4'10 1/2" 19' x 36 5 x 3 x 43 A 3 1/2"	6 4'8" 14' x 34 5 x 3 x 43 A 3 1/2"	6 4'8" 16' x 36 4 x 3 x 42 A 5"	5 5'0" 14' x 34 5 x 3 x 43 A 3 1/2"	5 5'0" 14' x 34 5 x 3 x 43 A 3 1/2"	1 4'6" 11' x 30 3 1/2 x 3 x 42 3 1/2"			✓
FORE AND AFTERS	Number ... Spacing ... Unsupported Lengths ... Scantling* and Sketch ... Bearing Surface ...	✓	✓	✓	✓	✓	✓	✓	✓	✓
HATCH COVERS	Material ... Thickness ... How fitted ... Bearing Surface ...	wood 2 1/2" F+A 2 1/2"	wood 2 1/2" F+A 3"	wood 2 1/2" F+A 3"	wood 2 1/2" F+A 3"	wood 2 1/2" F+A 3"	wood 2 1/2" F+A 3"	wood 2 1/2" F+A 3"	wood 2 1/2" F+A 3"	wood 2 1/2" F+A 2 1/2"
Spacing of Cleats	16" x 20"	24"	24"	24"	24"	24"	20"	none		18"
Number of Tarpaulins	1	2	2	2	2	2	2			2
*Are wood fore and afters steel shod at all bearing surfaces? Are battens and wedges efficient and in good condition? Are tarpaulins in good condition and in accordance with rule requirements? Are lashings provided in accordance with rule requirements?										

yes
yes
yes

modifications in red from approved plan.
J. 7.11.30.

Particulars of any special features:—

Endorsement at first survey and at surveys for renewal of Certificate:—

The fittings and appliances are in accordance with the particulars shown on this form (or as now modified) and are in good condition.

W. J. Craig
30. 10. 39.



© 2020

Lloyd's Register
Foundation