

COPY.

For Mr. Watt

Lloyd's Register of Shipping,

71, Fenchurch Street, E.C. 3.

15th March, 1926.

Sirs,

Reverting to your telegram of the 10th instant respecting the proposed alteration in the design of the steel motorship No.29 to be built by Messrs. Naskovs Skibsvaerft, we to inform you that the following alterations to the present scantlings will be required, the draught remaining at " as previously approved, :-

Between Decks


In way of bridge 7 x $3\frac{1}{2}$ x .50 B.A. intermediate frames bracketed to the deck or scarphed to the frames below should be fitted extending two frame spaces forward and aft of the bridge ends.

In way of forecastle 4 x 3 x .38 angle reverses should be fitted to present intermediate frames.

In way of poop 4 x 3 x .38 angle reverses fitted at every fourth existing frame.

In the wells $5\frac{1}{2}$ x 3 x .46 B.A. should be fitted at alternate frames.

frames 6 x $3\frac{1}{2}$ x .37 B.A. at every frame, bracketed or scarphed.
ridge deck beams $6\frac{1}{2}$ x $3\frac{1}{2}$ x .40 B.A. at every frame.
ridge side plating .55.
ridge deck stringer 57 x .44. Stringer bar 5 x 5 x .44.
ridge deck plating abreast hatches .42; .36 within line of hatches.

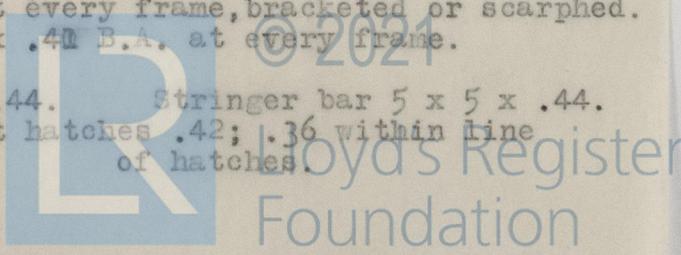

COPY.

(2)

Forecastle frames $6\frac{1}{2}$ x $3\frac{1}{2}$ x .42 B.A. at every, bracketed.
Forecastle side stringer $34\frac{1}{2}$ x .35.
Forecastle deck plating .34
Forecastle side plating .41.

Poop frames $6\frac{1}{2}$ x $3\frac{1}{2}$ x .40 B.A. at every, bracketed, or scarphed.
Poop $35\frac{1}{2}$ x .35 stringer, 9 x .35 ties.
Poop side plating .38.

Upper deck stringer in way bridge 47 x .40.
Upper deck plating .36.

The upper deck should be plated under the forecastle.

The equipment and increased strengthening at the breaks should be in accordance with the Rule requirements, and I shall be glad if you will forward detail plans for approval if it is intended to proceed with the proposed alteration to the design of the vessel.

At the same time I have to confirm my telegram to you today, as follows :-

"NAKSKOV 29
EBVUB = sending full particulars by letter
EVROZ = today.

I am, Dear Sirs,

Yours faithfully,

Secretary.

the Surveyors,

COPENHAGEN



© 2021

Lloyd's Register
Foundation

0159 2/2