

REPORT ON ELECTRIC LIGHTING INSTALLATION. No. 1304

Port of *Halifax N.S.* Date of First Survey *Sept 16, 1920* Date of Last Survey *Nov 27, 1920* No. of Visits
 No. in Reg. Book *53802* on the ~~Iron~~ *Steel* *Single Deck* *Canadian* *Mexiner* Port belonging to *Halifax N.S.*
 Built at *Halifax N.S.* By whom *Halifax Shipyards Ltd* When built *1920*
 Owners *Canadian Government Merchant Marine Ltd* Owners' Address *230 St James St Montreal P.Q.*
 Yard No. *1* Electric Light Installation fitted by *Halifax Shipyards Ltd* When fitted *1920*

DESCRIPTION OF DYNAMO, ENGINE, ETC.

4 Pole Compound wound direct connected to reciprocating engine made by H.H. Allen, Redford, England

Capacity of Dynamo *120* Amperes at *100/110* Volts, whether continuous or alternating current *Continuous*
 Where is Dynamo fixed *Engine room platform (Star²)* Whether single or double wire system is used *Double*
 Position of Main Switch Board *Engine room stove bulkhead (Star²)* Wiring switches to groups *Seven* of lights, &c., as below
 Positions of auxiliary switch boards and numbers of switches on each *No auxiliary boards, all circuits fused and controlled from main switch board, with controlling switch and fuse for each circuit, direct circuit leads*

If fuses are fitted on main switch board to the cables of main circuit *Yes* and on each auxiliary switch board to the cables of auxiliary circuits *Yes* and at each position where a cable is branched or reduced in size *Yes* and to each lamp circuit *Yes*
 If vessel is wired on the double wire system are fuses fitted to both flow and return wires or cables of all circuits including lamp circuits *Yes*
 Are the fuses of non-oxidizable metal *Yes* and constructed to fuse at an excess of *50* per cent over the normal current
 Are all fuses fitted in easily accessible positions *Yes* Are the fuses of standard dimensions *Yes* If wire fuses are used are permanent instructions fitted on or near each switch board giving particulars of proper size of fuse for each circuit *No wire fuses*
 Are all switches and fuses constructed of incombustible materials and fitted on incombustible bases *Yes*

Total number of lights provided for *152* arranged in the following groups:—

A Machinery space	40 lights each of 40 Watts	candle power requiring a total current of	20	Amperes
B Accommodation	56 lights each of 40 "	candle power requiring a total current of	28	Amperes
C Poop space	32 lights each of 40 "	candle power requiring a total current of	16	Amperes
D Forecastle	8 lights each of 40 "	candle power requiring a total current of	4	Amperes
E Navigation	16 lights each of 40 "	candle power requiring a total current of	8	Amperes
2 Mast head light with	2 lamps each of 32	candle power requiring a total current of	6	Amperes
2 Side light with	2 lamps each of 32	candle power requiring a total current of	6	Amperes
5 Cargo lights of	192	candle power, whether incandescent or are lights	<i>incandescent</i>	

If are lights, what protection is provided against fire, sparks, &c. *Yes*

Where are the switches controlling the masthead and side lights placed *Tell tale indicator, Wheel House.*

DESCRIPTION OF CABLES.

Main cable carrying *120* Amperes, comprised of *Single* wires, each *00* *B+S* S.W.G. diameter, *133079* *Circ hilo.* square inches total sectional area
 Branch cables carrying *20* Amperes, comprised of *Seven* wires, each # *6* S.W.G. diameter, *26250* square inches total sectional area
 Branch cables carrying *16* Amperes, comprised of " wires, each # *8* S.W.G. diameter, *16509* square inches total sectional area
 Leads to lamps carrying " Amperes, comprised of " wires, each # *14* S.W.G. diameter, *4106* square inches total sectional area
 Cargo light cables carrying *16* Amperes, comprised of " wires, each # *6* S.W.G. diameter, *26250* square inches total sectional area
24 # *8* *Mexconi* *16509*

DESCRIPTION OF INSULATION, PROTECTION, ETC.


All wire in machinery spaces, holds, and other exposed places are lead covered and armoured with wire braid, and in cabins with lead covered wire

Joints in cables, how made, insulated, and protected *No joints*

Are all the joints of cables thoroughly soldered, and the flux used not containing acids or other corrosive substances *Yes* Are all joints in accessible positions, none being made in bunkers, cargo spaces, or spaces which may at any time be used for carrying cargo, stores, or baggage *Yes*

Are there any joints in or branches from the cable leading from dynamo to main switch board *No*

How are the cables led through the ship, and how protected *Armoured cable led on yellow iron runways, all holes through beams lead bushed, passing through deck pipes with stuffing glands.*

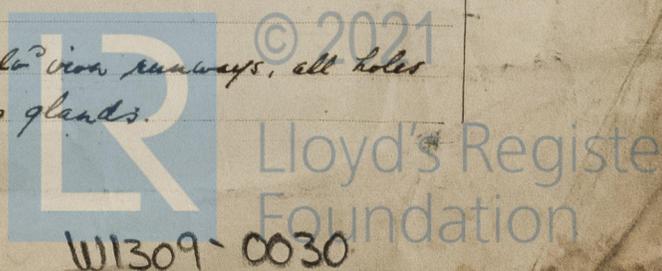

W1309-0030

DESCRIPTION OF INSULATION, PROTECTION, ETC.—continued.

Are they in places always accessible Yes

What special protection has been provided for the cables in open alleyways or where exposed to weather or moisture all lead covered and armoured

What special protection has been provided for the cables near galleys or oil lamps or other sources of heat Armoured cable

What special protection has been provided for the cables near boiler casings Armoured cable

What special protection has been provided for the cables in engine room Armoured cable

How are cables carried through beams all holes lead bushed through bulkheads, &c. water tight glands

How are cables carried through decks deck pipes with WT stuffing glands

Are any cables run through coal bunkers Yes or cargo spaces Yes or spaces which may be used for carrying cargo, stores, or baggage Yes

If so, how are they protected armoured cables, lead covered, on metal runways, & wood casings

Are any lamps fitted in coal bunkers or spaces which may at times be used for cargo, coals, or baggage Yes

If so, how are the lamp fittings and cable terminals specially protected special cargo fixtures with C.I. covers & stuffing glands

Where are the main switches and fuses for these lights fitted main switchboard, engine room

If in the spaces, how are they specially protected ✓

Are any switches or fuses fitted in bunkers No

Cargo light cables, whether portable or permanently fixed Permanently fixed in holds How fixed Bress clips

In vessels fitted on the single wire system, how is the dynamo terminal fixed to the hull of vessel ✓

How are the returns from the lamps connected to the hull ✓

Are all the joints with the hull in accessible positions ✓

Is the installation supplied with a voltmeter Yes and with an amperemeter Yes, fixed on main switchboard

VESSELS BUILT FOR CARRYING PETROLEUM.

In vessels built for carrying petroleum, are all switches and fuses fitted in positions not liable to the accumulation of petroleum vapour or gas ✓

Are any switches, fuses, or joints of cables fitted in the pump room or companion ✓

How are the lamps specially protected in places liable to the accumulation of vapour or gas ✓

The copper used is guaranteed to have a conductivity of not less than that of the Engineering Standards Committee's standard, and the wires are protected by tinning from the sulphur compounds present in the insulating material.

Insulation of cables is guaranteed to have a resistance of not less than 600 megohms per statute mile at 60° Fahrenheit after 24 hours' immersion in water, the test being made after one minute's electrification at not less than 500 volts and while the cable is still immersed.

The foregoing statements are a correct description of the Electric Light installation fitted by us on this vessel and we declare that it is at this date in good order and safe working condition.

HALIFAX SHIPYARDS, LIMITED.

Electrical Engineers

Date

Dec 7-1920

COMPASSES.

Distance between dynamo or electric motors and steering compass dynamo 120 ft. from wireless motor 50 ft.

Distance between dynamo or electric motors and steering compass " " 125 " " " 55 "

The nearest cables to the compasses are as follows:—

A cable carrying	<u>10</u>	Amperes	<u>8</u>	feet from standard compass	<u>10</u>	feet from steering compass
A cable carrying	<u>24</u>	Amperes	<u>24</u>	feet from standard compass	<u>28</u>	feet from steering compass
A cable carrying		Amperes		feet from standard compass		feet from steering compass

Have the compasses been adjusted with and without the electric installation at work at full power Yes

The maximum deviation due to electric currents, etc., was found to be ✓ degrees on ✓ course in the case of the standard compass and ✓ degrees on ✓ course in the case of the steering compass.

HALIFAX SHIPYARDS, LIMITED.

Builder's Signature.

Date

Dec 7-1920

GENERAL REMARKS.

Operating Manager.

The electric light installation on this vessel has been fitted in accordance with the Rules, and in a satisfactory manner. The materials and workmanship are good. It has been tried under working conditions with satisfactory results.

It is submitted that this vessel is eligible for THE RECORD.

Blee Light Bell 5/1/21

J. Moon.

Surveyor to Lloyd's Register of Shipping.

Committee's Minute

FRI. 11 FEB. 1921



© 2021

Lloyd's Register Foundation

THE SURVEYORS ARE REQUESTED NOT TO WRITE ACROSS THIS MARGIN.

2nd 11.19.—Transfer.