

Lloyd's Register of Shipping.

Ship's Name "SOUTH AFRICA STAR"

Official No. 181897

Memorandum of alterations reported since ship was surveyed for assignment of Load Lines in

FREEBOARD DECK HATCHWAYS.


Closing arrangements on main hatchways consist of wood covers, tarpaulins, batten bars and double wedges inserted between coamings and cargo ramps.

Wedge positions 24" apart and 6" from hatch corners are indicated on cargo ramps by arrows cut in on same.

The above arrangements are as approved per letter of 6th Jan 1950 reference F.

A copy of this report has been placed on board the vessel.

W.A. Gormack

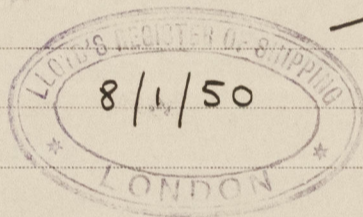

G.H.W.

23 JAN 1950