

(LLOYD'S REGISTER.)

VESSELS OF 100 TONS AND UPWARDS.

22 FEB 1939

These particulars are supplied by the Registrar General of Shipping and Seamen for the sole use of Lloyd's Register of Shipping.

Signal Letters (if any) G.K.K.V.

Official Number.	Name of Ship.	No., Date, and Port of Registry.
167176	SAN ELISEO	30 in 1939 London

No., Date, and Port of previous Registry (if any).

Whether British or Foreign Built.	Whether a Sailing, Steam, or Motor Ship, if Steam or Motor Ship how propelled.	Where Built.	When Built.	Name and Address of Builders.
British	Motor Ship Single Screw	Port Glasgow	1939	Lithgows Limited, Port Glasgow.

Number of Decks ...	One	Length from fore part of stem, to the aft side of the head of the stern post ...	Feet.	Tenths.
Number of Masts ...	Two		462	4.5
Rigged ...	Not	Main breadth to outside of plank ...	61	2.0
Stem ...	Straight	Depth in hold from tonnage deck to ceiling amidships ...	33	1.0
Stern ...	Cruiser	Depth in hold from upper deck to ceiling amidships, in the case of three decks and upwards ...	-	-
Build ...	Glencher	Depth from top of deck at side amidships to bottom of keel	33	4.8
Framework and description of vessel	Steel Oil Carrier	Round of beam ...	1	2.5
Number of Bulkheads	Fifteen complete Two partial	Length of engine room, if any ...	75	7.5

Particulars of propelling Engines, etc. (if any), and Water Ballast Tanks, as supplied by Builders, Owners, or Engine Makers.

No. of sets of Engines.	Description of Engines.	Whether British or Foreign Made.	When made.	Name and address of makers.	Reciprocating Engines.		Rotary Engines.	N.H.P. B.H.P. I.H.P. Estimated Speed of Ship.
					No. and Diameter of Cylinders in each set.	Length of Stroke.		
One	Vertical Direct Acting Internal Combustion	British	1939	John G. Kincaid & Co. Ltd.,	Eight	650 m/m. 1400 m/m.	-	262 3500 4375
No. of Shafts.	Particulars of Boilers.		When made.	Name and address of makers.	Reciprocating Engines.		Rotary Engines.	N.H.P. B.H.P. I.H.P. Estimated Speed of Ship.
	Description.	Number.			No. and Diameter of Cylinders in each set.	Length of Stroke.		
One	Cylindrical Multitubular	Two	British	Greenock.	25 7/16	55 1/8	-	12 Knots

Number of water ballast tanks, and their capacity in tons:— Five - 665 tons.

PARTICULARS OF TONNAGE.

GROSS TONNAGE.	No. of Tons.	DEDUCTIONS ALLOWED.	No. of Tons.
Under Tonnage Deck ...	7227.64	On account of space required for propelling power	2573.29
Space or spaces between Decks21	On account of spaces occupied by Seamen or Apprentices, and appropriated to their use, and kept free from Goods or Stores of every kind, not being the personal property of the Crew	
Forecastle (Side Houses in.) ...	29.70		
Bridge space (Side Houses in) ...	52.44		
Poop or Break ...	241.85	These spaces are the following, viz. :—	
Side Houses ...	97.50	Spaces in Poop and in houses above deck.	444.04
Deck Houses ...	206.97	(Number of Seamen or Apprentices for whom accommodation is certified 45.)	
Chart House ...			
Spaces for Machinery, and light, and air, under Section 78 (2) of the Merchant Shipping Act, 1894 ...	185.23	Deductions under Section 79 of the Merchant Shipping Act, 1894, and Section 54 of the Merchant Shipping Act, 1906, as follows:—	
Excess of Hatchways ...		Cubic Metres. Chart Space 9.48	
Gross Tonnage ...	8041.54	Masters Accommodation 22.35	
Deductions, as per contra ...	3255.63	Wireless Telegraphy 5.37	238.30
Register Tonnage ...	4785.91	Space for Boatswain's Store 56.55	
		Ballast Total 35.72	3255.63
		Water Ballast Spaces 108.85	

NOTE 1.—The tonnage of the engine room spaces below the Upper Deck is 860.82 tons, and the tonnage of the total spaces framed in above the Upper Deck for propelling machinery and for light and air is 223.45 tons.

NOTE 2.—The undermentioned spaces above the Upper Deck are not included in the cubical contents forming the ship's register tonnage.

Forecastle	L. 45.8 ft. = 73.86 tons.
Bridge	L. 46.2 " = 152.70 "
Passageways abreast casings in Poop	L. 62.9 " = 22.96 "
" " " " " " " "	L. 62.9 " = 22.96 "

Name of Master Certificate of { Service No. Competency No.


No. of Owners

Name, Residence, and Description of Managing Owner if there are more owners than one.

Eagle Oil & Shipping Co. Ltd., 16, Finsbury Circus, London, E.C.2.

Shares: Sixty-four.

Dated 9th February, 1939.

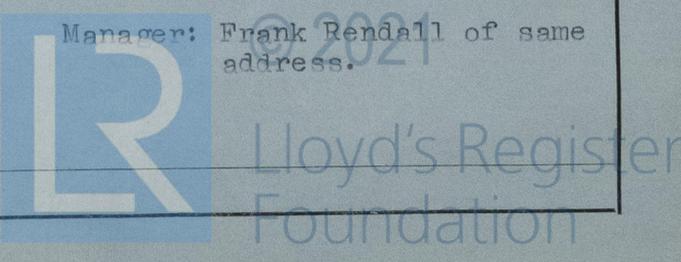

Mr Aden



© 2021

Lloyd's Register
Foundation