

13 APR 1950

Rpt. C. 11 (Contd.)

Index No.

Lloyd's Register of Shipping.


Ship's Name S.S. "LAKE SICAMOUS" Official No. 175596

Memorandum of alterations reported since ship was surveyed for assignment of Load Lines
in 1944

This ship now surveyed for alterations for an increase in draught of nine
and one quarter (9-1/4") inches.

NOW DONE:- Stiffeners on bulkheads Nos. 40, 86, 106 and 135 reinforced by welded flat
bars and horizontal flat bars welded edge on between bulkhead stiffeners in
each strake of plating on the above mentioned bulkheads also stringer in
No. 1 hold reinforced with 12" x 1" face bar and attachment of the stringer
at web frame reinforced with gusset plate and brackets as approved.


Freeboard Verification form Rpt. C 12(a) forwarded to Montreal office and
new Load Line Certificates received and placed on board.

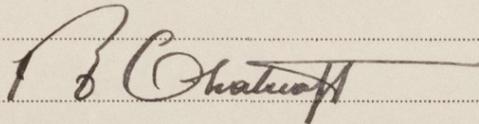

SURVEYOR TO LLOYD'S REGISTER OF SHIPPING,

Vancouver, B.C.

2nd March, 1950.



277

RR

