

FREEBOARD PARTICULARS.

Name:-

Yard No:- 108/9

Registered Length 347'-9"

" Breadth 52'-8"

" Depth 23'-0 1/2"

Tonnage U.D. APPROX. 3270.

Gross APPROX. 3750.

Length on Load Line 347'-0"

Depth moulded 27'-0"

Number of Deck 1-1"

Length of Beam 52'-6"

Plate thickness of wood deck -

Sheer at side at stem 6'-0"

" " " " stern 3'-0"

" " 1/8 len. from stem 1'-8"

" " 1/8 " " stern .85'

Lowest point of sheer abaft amidships -

Length of forecastle actual on deck ^{CENTRE 63'-0"} _{SIDE 52'-6"} Height 7'-6"

Overhang of forecastle deck abaft bulkhead 3'

Length of bridge - Height -

Overhang of bridge deck - Front - Aft end -

Length of Poop 94'-0" Height 7'-6"

Overhang of poop beyond bulkhead 3'

Bulkhead at fore end of bridge -

" " aft " " forecastle ^{TO RULE}

Offening to bridge front bulkhead -

" " bulkhead at fore end of poop ^{TO RULE}

Number and number of freeing ports (8 EACH SIDE) 16 TOTAL. 48" x 18"

Height of hatch coamings above deck 30" covers STEEL WATERTIGHT PATENT HATCH COVERS.





Number of hatches 4 @ 32' x 30' 1 @ 21' x 30' 1 @ 14' x 20' 1 @ 9' x 30'

Decks -

Height of lowest side scuttle above base 32'-6"

Displacement 8630 ON 21'-0" DRAFT.

Per inch at same ABOUT 37.

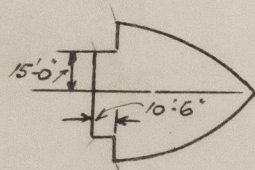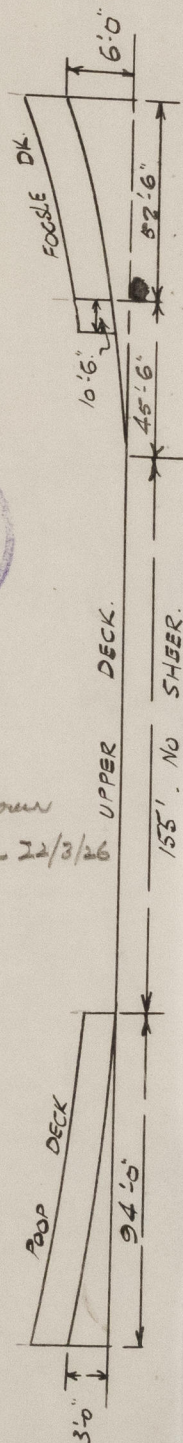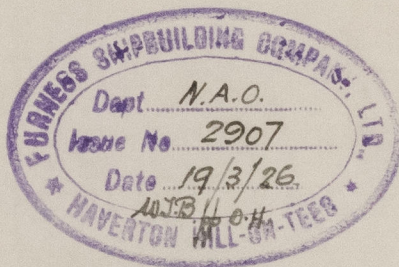

© 2020

Lloyd's Register Foundation

004861-004865-0057