

REPORT ON ELECTRICAL EQUIPMENT.

(OTHER THAN FOR THE PROPULSION OF THE VESSEL)

Received at London Office

Date of writing Report 25th Mar, 1938 When handed in at Local Office - 8 APR 1938 Port of Sunderland

No. in Survey held at Sunderland Date, First Survey 22nd February Last Survey 23rd March, 1938
Reg. Book. Suppl. (Number of Visits.....)

37876 on the M.V. "DERRYMORE"

Tons { Gross 4799
Net 2822

Built at Burntisland By whom built Burntisland S.B. Co. Ltd Yard No. 213 When built 1938

Owners Mc Cowan & Sons Ltd. Port belonging to London

Electric Light Installation fitted by Burntisland S. B. Co. Ltd. Contract No. 213 When fitted 1938

Is the Vessel fitted for carrying Petroleum in bulk no

System of Distribution Double wire

Pressure of supply for Lighting 110 volts, Heating — volts, Power 110 volts.

Direct or Alternating Current, Lighting Direct Power Direct

If alternating current system, state frequency of periods per second —

Has the Automatic Governor been tested and found efficient when the whole load is suddenly thrown on or off Yes

Generators, do they comply with the requirements regarding temperature rise Yes, are they compound wound Yes

are they over compounded 5 per cent. Yes, if not compound wound state distance between each generator —

Where more than one generator is fitted are they arranged to run in parallel no, is an adjustable regulating resistance fitted in series with each shunt field Yes

approved Yes, Certe. Newwith Have machines over 100 kw. been inspected by the Surveyors during manufacture and testing none fitted

Have certificates for generators under 100 kw. been supplied and approved Manufacturers' Test Certe. only supplied

Are all terminals accessible, clearly marked, and furnished with sockets Yes, are they so spaced or shielded that they cannot be accidentally earthed, short circuited, or touched Yes

Position of Generators Engine room starboard side, is the ventilation in way of the generators satisfactory Yes are they clear of all inflammable material Yes if situated near unprotected

woodwork or other combustible material, state distance of same horizontally from or vertically above the generators — and —

are the generators protected from mechanical injury and damage from water, steam or oil Yes, are their axes of rotation fore and aft Yes

Earthing, are the bedplates and frames of the generating plant efficiently earthed Yes are the prime movers and their respective generators in metallic contact Yes

near generators Main Switch Boards, where placed Engine room starboard side If the generators and main switchboard are not placed in the same compartment, is each generator provided with a fuse on each insulated pole as near as possible to the terminals of the generator, additional to that provided on the main switchboard —

Switchboards, are they placed in accessible positions, free from inflammable gases and acid fumes Yes, are they protected from mechanical injury and damage from water, steam or oil Yes, if situated near unprotected woodwork or other combustible material, state distance of same horizontally from or vertically above the switchboards — and —, are they constructed wholly of durable, non-ignitable non-absorbent materials Yes

is it of an approved type Yes, is all insulation of high dielectric strength and of permanently high insulation resistance Yes

non-hygroscopic insulating material, and the slab similarly insulated from its framework —, is the non-hygroscopic insulating material of an approved type —, and is the frame effectively earthed Yes

Are the fittings as per Rule regarding: — spacing or shielding of live parts Yes, accessibility of all parts Yes, absence of fuses on back of board Yes, temperature rise of omnibus bars Yes

individual fuses to voltmeter, pilot or earth lamp Yes, are moving parts of switches alive in the "off" position no are all screws and nuts securing connections effectively locked Yes are any fuses fitted on the live side of switches no

Main Switchgear, description of switchgear for each generator and each outgoing circuit, and arrangement of equalizer switches D.P. cuts. & D.P. fuses on generator mains; D.P.C.D. cuts. & D.P. fuses on outgoing circuits


Are turbine driven generators fitted with emergency trip switch as per rule — Are cupboards or compartments containing switchboards composed of fire-resisting material or lined with approved material —

Instruments on main switchboard 2 ammeters 1

voltmeters — synchronising device for paralleling purposes. For compound machines is the ammeter connected on the opposite pole to equaliser connection —

Earth Testing, state what means are provided at the main switchboard for indicating the state of the insulation of the system —

E lamps coupled to E through switches of fuses Switches, Circuit Breakers and Fusible Cut-outs, do these comply with the requirements of the Rules Yes are the fusible cutouts of an approved type Yes have the reversed

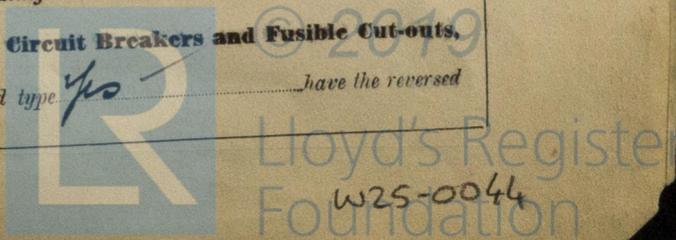

current protection devices been tested under working conditions Yes are all fuses labelled as per rule Yes

Joint Boxes, Section and Distribution Boards, is the construction, protection, insulation, material, and position of these as per rule Yes

Cables: Single, twin, concentric, or multicore Yes are the cables insulated and protected as per Tables IV, V, X, XI, XII or XIII of the Rules Yes

If the cables are insulated otherwise than as per Rule, are they of an approved type Yes **Fall of Pressure,** state maximum between bus bars and any point of the installation under maximum load less than 5.3 volts **Cable Sockets,** are the ends of all cables having a sectional area of 0.04 square inch and above provided with soldering sockets Yes

Paper Insulated and Varnished Cambric Insulated Cables. If conductors are paper or varnished cambric insulated, is the dielectric at the exposed ends of the conductor protected from moisture by being suitably sealed with insulating compound Yes, or waterproof insulating tape Yes **Cable Runs,** are the cables fixed as far as possible in accessible positions not exposed to drip or accumulation of water or oil, or to high temperature from boilers, steam pipes, uptakes or other hot objects, or to avoidable risk of mechanical damage Yes are cables laid under machines or floorplates No if so, are they adequately protected Yes

Are cables in machinery spaces, galleys, laundries, bathrooms and lavatories lead covered or run in conduit Yes **Support and Protection of Cables,** state how the cables are supported and protected L.C.A. cables clipped to ship's structure in machinery spaces; L.C. cables clipped to wood grounds in accommodation.

If cables are run in wood casings, are the casings and caps secured by screws Yes, are the cap screws of brass Yes, are the cables run in separate grooves Yes If armoured and lead covered cables are secured by metal clips, are the clips spaced as per Table VIII Yes

Refrigerated Chambers, are the cables and fittings in accordance with the special requirements no cables or fittings in this space

Joints in Cables, state if any, and how made, insulated, and protected home made

Watertight Glands and Deck Tubes, are all cables passing through decks and watertight bulkheads provided with deck tubes or watertight glands Yes **Bushes in Beams and Non-watertight Partitions,** where unarmoured cables pass through beams and non-watertight partitions, are the holes efficiently bushed Yes state the material of which the bushes are made Lead

Earthing Connections, state what earthing connections are fitted and their respective sectional areas Yes are their connections made as per Rule Yes

Alternative Lighting, are the groups of lights in the propelling machinery space arranged as per Rule Yes **Emergency Supply,** state position and method of control of the emergency supply and how the generator is driven Yes

Navigation Lamps, are these separately wired Yes, controlled by separate switch and separate fuses Yes, are the fuses double pole Yes are the switches and fuses grouped in a position accessible only to the officers on watch Yes **Secondary Batteries,** are they constructed and fitted as per Rule Yes are they ventilated as per Rule Yes

Fittings, are all fittings on weather decks, in stokeholds and engine rooms and wherever exposed to drip or condensed moisture, watertight Yes are any fittings placed in spaces in which goods are liable to be stacked in close proximity to them; if so, how are they protected Yes are any fittings placed in spaces where inflammable or explosive dust or gases are liable to be present, if so, how are they protected Yes how are the cables led Yes

where are the controlling switches situated Yes are all fittings suitably ventilated Yes, are all switches and lampholders constructed wholly of non-ignitable, non-absorbent materials Yes

Heating and Cooking Appliances, are they constructed and fitted as per Rule Yes, are air heaters constructed and fitted as per Rule Yes

Searchlight Lamps, No. or home fitted whether fixed or portable Yes, are their fittings as per Rule Yes

Motors, are their working parts readily accessible Yes, are the coils self-contained and readily removable for replacement Yes are the brushes, brush holders, terminals and lubricating arrangements as per Rule Yes, are the motors placed in well-ventilated compartments in which inflammable gases cannot accumulate and clear of all inflammable material Yes, are they protected from mechanical injury and damage from water, steam or oil Yes are their axes of rotation fore and aft Yes, if situated near unprotected woodwork or other combustible material, are the motors of the totally enclosed, pipe ventilated, forced draught, drip or flame proof type Yes if not of this type, state distance of the combustible material horizontally or vertically above the motors Yes and Yes have machines of over 100 BHP been inspected by the Surveyors during manufacture and testing home fitted have certificates for all motors for essential services been supplied and approved Yes, Certs. furnished

Control Gear and Resistances, are the generator field and motor speed regulators, starters and controllers constructed and fitted as per Rule Yes **Lightning Conductors,** where lightning conductors are required, are these fitted as per Rule Yes **Ships carrying Oil having a Flash Point less than 150° F.** Have the special requirements of the Rules been complied with regarding switches, joint boxes, section and distribution boards, protection of cables, method of distribution, lead of cables, lights and fittings Yes are all fuses of the fitted cartridge type Yes are they of an approved type Yes

If portable lamps for use in dangerous spaces are supplied, are they of a self-contained, battery-fed flameproof type approved for use in dangerous spaces Yes

Spare Gear, if the vessel is for open sea service have spares been supplied as per Rule Yes are they suitably stored in dry situations Yes

Cert. for pumping motor to follow

PARTICULARS OF GENERATING PLANT.

DESCRIPTION OF GENERATOR.	No. of	RATED AT				DRIVEN BY	WHERE DRIVEN BY AN INTERNAL COMBUSTION ENGINE.	
		Kilowatts.	Volts.	Ampères.	Revs. per Min.		Fuel Used.	Flash Point of Fuel.
MAIN	2	12.5	110	114	850	Single cylinder Steam engines		
AUXILIARY								
EMERGENCY								
ROTARY TRANSFORMER								

GENERATOR, LIGHTING AND HEATING CONDUCTORS.

DESCRIPTION.	CONDUCTORS.		COMPOSITION OF STRAND.		TOTAL MAXIMUM CURRENT AMPERES.		Approximate Length (Lead and Return) Feet.	Insulated with	HOW PROTECTED.
	No. per Pole.	Total Nominal Area per Pole Sq. Ins.	No.	Diameter.	Circuit.	Rule.			
MAIN GENERATOR	1	.1	19	.083	114	118	52 x 70	V.I.R.	L.C.A. AB.
EQUALISER CONNECTIONS									
AUXILIARY GENERATOR									
EMERGENCY GENERATOR									
ROTARY TRANSFORMER GENERATOR									
ENGINE ROOM	1	.007	7	.036	10.2	24	24	V.I.R.	L.C.A. AB.
BOILER ROOM									
AUXILIARY SWITCHBOARDS	1	.01	7	.044	22.5	31	120	V.I.R.	L.C.A. AB.
Cargo Ltg. D.B.									
ACCOMMODATION									
Offs. & Eng'g. Accom.	1	.007	7	.036	14.8	24	120	V.I.R.	L.C.A. AB.
Chief Accom.	1	.007	7	.036	5.8	24	480	V.I.R.	L.C.A. AB.
Navigation Ltg.	1	.003	3	.036	3.5	12	180	V.I.R.	L.C.A. AB.
WIRELESS	1	.007	7	.036	15	24	240	V.I.R.	L.C.A. AB.
SEARCHLIGHT	1	.002	3	.029	.36	7.8	240	V.I.R.	L.C. & L.C.A. AB.
MASTHEAD LIGHT	1	.002	3	.029	.36	7.8	60	V.I.R.	L.C.
SIDE LIGHTS	1	.002	3	.029	.14	7.8	40	V.I.R.	L.C.
COMPASS LIGHTS	1	.002	3	.029	.36	7.8	500	V.I.R.	L.C. & L.C.A. AB.
STERN LIGHTS	1	.002	3	.029	.36	7.8		V.I.R.	
CARGO LIGHTS									
HEATERS									

MOTOR CONDUCTORS.

DESCRIPTION.	No. of Motors.	CONDUCTORS.		COMPOSITION OF STRAND.		TOTAL MAXIMUM CURRENT AMPERES.		Approximate Length (Lead and Return) Feet.	Insulated with	HOW PROTECTED.
		No. Per Pole.	Total Nominal Area per Pole Sq. Ins.	No.	Diameter.	In Circuit.	Rule.			
BALLAST PUMP										
MAIN BILGE LINE PUMPS										
GENERAL SERVICE PUMP										
EMERGENCY BILGE PUMP										
SANITARY PUMP										
CIRC. SEA WATER PUMPS										
CIRC. FRESH WATER PUMPS										
AIR COMPRESSOR										
FRESH WATER PUMP										
ENGINE TURNING GEAR										
ENGINE REVERSING GEAR										
LUBRICATING OIL PUMPS										
OIL FUEL TRANSFER PUMP										
WINDLASS										
WINCHES, FORWARD										
WINCHES, AFT										
STEERING GEAR—										
(a) MOTOR GENERATOR										
(b) MAIN MOTOR	1	1	.007	7	.036	17	24	180	V.I.R.	L.C.A. AB.
WORKSHOP MOTOR	1	1	.007	7	.036	17	24	180	V.I.R.	L.C.A. AB.
VENTILATING FANS										
Oil Pumps	2 @	1	.01	7	.044	25.1	31	270 & 282	V.I.R.	L.C.A. AB.
Provision Pump	1	1	.007	7	.036	17	24	192	V.I.R.	L.C.A. AB.
Boiler Fan	1	1	.01	7	.044	31	31	198	V.I.R.	L.C.A. AB.
Refining Machinery	2	1	.007	7	.036	13.5	24	180	V.I.R.	L.C.A. AB.
Crane Motor	1	1	.007	7	.036	17	24	192	V.I.R.	L.C.A. AB.

The Electrical Equipment is installed in accordance with the approved plans.
 All Insulated Conductors are guaranteed to withstand the immersion and resistance tests specified in the Rules.
 The foregoing is a correct description.

FOR THE BURNTISLAND SHIPBUILDING COMPANY LTD.

J. Lark DIRECTOR. Electrical Engineers. Date 28th Mar. 1938

COMPASSES.

Minimum distance between electric generators or motors and standard compass 56 feet
 Minimum distance between electric generators or motors and steering compass 48 feet
 The nearest cables to the compasses are as follows:—
 A cable carrying 14 Amperes on the feet from standard compass 12 feet from steering compass.
 A cable carrying 14 Amperes 12 feet from standard compass on the feet from steering compass.
 A cable carrying _____ Amperes _____ feet from standard compass _____ feet from steering compass.
 Have the compasses been adjusted with and without the electric installation at work at full power Yes
 Has the effect of switching on and off circuits, motors and other electro-magnetic apparatus within the vicinity of the compasses been noted Yes
 The maximum deviation due to electric currents was found to be Nil degrees on Every course in the case of the standard compass, and Nil degrees on Every course in the case of the steering compass.

FOR THE BURNTISLAND SHIPBUILDING COMPANY LTD.

J. Lark DIRECTOR. Builder's Signature. Date 28th Mar. 1938

Is this installation a duplicate of a previous case No If so, state name of vessel _____

General Remarks (State quality of workmanship, opinions as to class, &c.) The electrical equipment of this vessel has been fitted out under special survey. The materials used and the workmanship are good. On completion the equipment was operated under working conditions, the dynamo engine governors tested, the main switchboard, distribution boards, switches, fuses, cables and fittings examined and tested, all motors run, insulation resistance of all circuits measured and spare gear checked. In my opinion, this equipment can be considered suitable for a classed vessel. Direction finding apparatus is fitted.

W. L. J.
12/4/38.

Total Capacity of Generators 25 Kilowatts.

The amount of Fee ... £ 20 : - : 8 APR. 1938
 Travelling Expenses (if any) £ : : 16.4.38
87.4

Gauterson
 Surveyor to Lloyd's Register of Shipping.

Committee's Minute

WED. 20 APR 1938

Assigned

See Lth. 76. 19520

20.12.38.—Transfer. The Surveyors are requested not to write on or below the space for Committee's Minute



© 2019

Lloyd's Register Foundation