

LIST OF SPARE PARTS.

MAIN ENGINES.

"FOYLEBANK"

- 1 Pair connecting rod lower end bolts.
- 1 Pair connecting rod lower end bushes.
- 2 Pairs connecting rod upper end bolts.
- 2 Pairs connecting rod upper end bushes.
- 4 Main bearing bolts and nuts.
- 1 Piston (no rings fitted).
- 4 Sets piston rings.
- 1 Cylinder head complete with liner and water jacket but without valves.
- 1 Set of studs and nuts for cylinder head valves.
- 2 Inlet valves with casings, springs, etc., complete with attachment screws.
- 8 Exhaust valves with casings, springs, etc., complete with attachment screws.
- 8 Exhaust valve spindles complete with heads.
- 8 Exhaust valve seats.
- 2 Starting valves with casings, springs, etc., complete with attachment screws.
- 1 Starting valve spindle.
- 8 Fuel valves with casings, springs, etc., complete.
- 8 Fuel valve spindles, upper.
- 16 " " " lower.
- 8 Fuel valve spindle sleeves, upper.
- 16 " " " lower.
- 32 Fuel valve nozzles.
- 6 " " air escape valve screws.
- 2 Cylinder relief valves complete.
- 1 Set safety caps for one engine.
- 1 Roller for inlet and starting valves.
- 2 Rollers for exhaust valves with pins.
- 1 Chain of each size fitted.
- 12 Chain links of each size fitted, for readily repairing chains.
- 1 Complete set springs for one engine.
- 8 Additional springs for exhaust valves.
- 1 Set of special packing for one engine.
- 3 Lbs. 1/4" Palmetto packing.
- 2 Lbs. asbestos cord.

W37-0080 (1/5-)



Lloyd's Register Foundation

MAIN ENGINES (CONTD.).

"FOYLEBANK"

- 2 Sheets of 1/32", 1/16" thick jointing, 4'-0" x 4'-0".
- 2 Sheets of 1/8" asbestos millboard, 4'-0" x 4'-0".
- 1 Set of inlet pipes and fittings for piston cooling gear, complete with all nuts and flanges, etc., fitted.
- 4 Sets of wearing parts for piston cooling gear.
- 4 Lengths of fuel pump delivery pipe.
- 2 Fuel oil pumps complete, i.e. for one plunger.
- 12 Fuel oil pump plungers with sleeves.
- 12 " " " release plungers with sleeves.
- 1 Complete set of working parts for one fuel pump plunger, other than the above.
- 6 Fuel pump cam rollers.
- A quantity of assorted bolts and nuts.
- 1 Set of rubber rings for one main engine but not more than 100 of each size.
- 12 Glasses for vacuum lubricators.
- 2 Plungers complete.

AUXILIARY ENGINES.

- 1 Cylinder head complete with liner and water jacket.
- 1 Piston and gudgeon pin (no rings fitted).
- 1 Gudgeon pin bush.
- 1 Pair connecting rod lower end bushes.
- 1 Pair connecting rod lower end bolts.
- 4 Main bearing studs and nuts.
- 2 Sets piston rings.
- 3 Fuel valves with casings, complete.
- 6 Fuel valve spindles.
- 2 Fuel valve spindle cases.
- 3 Fuel valve body seats.
- 2 Sets pulveriser rings,
- 2 Inlet valves with casings complete.
- 3 Exhaust valves with casings, complete.
- 4 Exhaust valve spindles.
- 1 Starting valve with casing, complete.

W37-0080 (2/5)



AUXILIARY ENGINES (CONTD.).

"FOYLEBANK"


- 1 Cylinder safety valve complete.
- 1 Complete set of springs for one engine.
- 2 Governor springs.
- 6 Additional exhaust valve springs.
- 2 Fuel pump plungers and sleeves.
- 1 Complete set of working parts for one fuel pump plunger.
- 10 Chain links of each size fitted for readily repairing chain.
- 2 Sets air compressor valves, complete.
- 1 Set air compressor valves (valves only).
- 1 Distance piece of each pattern fitted.
- 6 L.P. suction valve springs.
- 18 L.P. discharge valve springs.
- 18 H.P. valve springs.
- 2 Sets piston rings for one compressor.
- 1 Set piston rings for H.P. compressor (additional).
- 1 H.P. cooling coil.
- 6 M.P. cooler tubes.
- 6 L.P. cooler tubes.
- 2 Sets of rubber rings for one auxiliary engine, but not more than 50 of each size.
- 2 Rubber rings for compressor hood (additional).
- 1 Filter for lubricating pump.
- 1 Set of studs with nuts for one cylinder cover.

BOILER.

- 1 Spring for safety valve.
- 1 Valve for feed check valve.
- 12 Water gauge glasses and 24 packing rings.
- 12 Door joints.
- 6 Boiler tubes.

OIL FUEL INSTALLATION.

- 1 Burner.
- 12 Burner tips.
- 1 Burner supply valve.

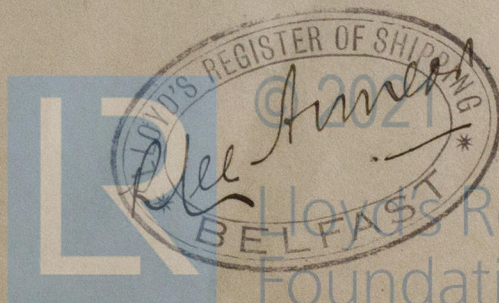

Lloyds Register
Foundation

W37-0080(3/5)

OIL FUEL INSTALLATION.

- 1 Burner supply pipe.
- 6 Burner springs.
- 1 Suction filter basket.
- 1 Delivery filter basket.
- 2 Flame controls.
- 2 Jacket tubes.
- 1 Coil for heater.
- 1 Lighting up torch.
- 1 Set of spanners for installation.

" FOYLEBANK "

AUXILIARY MACHINERY.

- 1 Set of valves (suction and delivery) for one pump of each size so fitted.
- 1 Set of piston and bucket rings for one pump or engine of each size so fitted.
- 1 Spring of each size for relief valves.
- 1 Impeller for bilge and ballast pumps.
- 1 Pair top and bottom end bushes and bolts for air and circulating pumps.
- 1 Pair top and bottom end bushes and bolts for steam driven dynamo engine.
- 2 Thermometers for lubricating oil coolers.
- 6 Evaporator gauge glasses.


EMERGENCY AIR COMPRESSOR.

- 1 Delivery valve for L.P. cylinder.
- 1 Spring for delivery valve.
- 1 Guide for delivery valve.
- 1 Plug for delivery valve.
- 1 Valve for H.P. cylinder cover.
- 1 Spring for valve.

SHAFTING.

- 1 Propeller shaft with right hand thread.
- 1 Set of tunnel shaft coupling bolts and nuts.
- 2 Propeller blades, manganese bronze, one right and one left hand.

W37 - 0080 (4/s)



"FOYLE BANK"

SHAFTING (CONTD.).

- 1 Set studs, nuts and locking screws for one propeller blade.
- 1 Set crankshaft coupling bolts and nuts.
- 1 Set of pads for one face of each thrust block.



W37-0080 (S/S)



© 2021

Lloyd's Register
Foundation