

Rpt. 11b. 30921

VERIFICATION

Lloyd's Register of Shipping.

SURVEYS FOR FREEBOARD.—STEAM SHIPS.

PARTICULARS RELATING TO STEAM SHIPS WHETHER FLUSH DECKED, OR WITH TOP GALLANT FORECASTLES, SHORT POOPS AND BRIDGE HOUSES DISCONNECTED, OR WITH TOP GALLANT FORECASTLES HAVING LONG POOPS, OR RAISED QUARTER DECKS CONNECTED WITH BRIDGE HOUSES, OR OTHERWISE.

Index No. 30946
(For London Office only.)

SAT 30 JUN 1923

Port of Survey MIDDLESBRO
Date of Survey while Building.
Name of Surveyor A. Fairley

Ship's Name	Port of Registry and Nationality.	Official Number.	Gross Tonnage.	Date of Build.	Particulars of Classification.
Hockwood	London Br.	147515	1537	1923	100AI (Bottom) New Rules.
Number in Register Book ✓					
Registered dimensions from Ship's Register.	LENGTH. 244.8	BREADTH. 38	DEPTH. 17.55	UNDER DECK TONNAGE. 1260.01	Moulded Depth as measured. 19.7"
Length on LOADLINE.	244.5	Frame Depth 7.5 Rule " 5 = - .42	Ceiling +.20 Sheer -.87 Level Deck	Tanks } inc. above	Addition for Keel below base line for draught record. 1.5" inches.
CORRECTED DIMENSIONS.	244.5	37.91	16.88	1260.01	
Co-efficient of fineness.....	.81				
Any modification necessary { Para. 4 (a) to (e)*	- .02	203			
Co-efficient as corrected79				
Sheer { Stem..... at Sternpost ...		÷ 2 =	... Mean		
Sheer at $\frac{1}{2}$ of the length from { Stem Sternpost		÷ 2 =	... Mean		
Gradual mean Sheer due to round of beam only $\frac{2}{3} = .3$					
Standard mean Sheer [Table, Para. 18]	34.45	Correction			
Difference.....	$34.45 \div 4 = 8.61'$				
§ If limited as Para. 18 (f)		= + 73/4"			
Rise in Sheer { At front of bridge house..... from amidships { At after end of forecastle				✓	
Fall in Sheer { Para. 18 (d)		÷ 2 =		✓	
Length uncovered			Correction		
ALLOWANCE FOR DECK ERECTIONS :—					
Freeboard, Table C.....	1.33/4				
Correction for Length, if required (Para. 12, 13, and 14)	+ .5				
Freeboard by Table A. corrected for sheer, and for length, if required (Para. 12, 13, and 14)	4' - 63/4				
Difference	3' - 22/4				
Percentage as below.....	31.23%				
	12.02				
Correction for R. Q. Dk. if engine and boiler openings not covered by bridge house (Para. 11)	- 1.0				
Allowance for Deck Erections					
Length.....	Length allowed.....	Height.....			
23.5 Forecastle.....	23.3 3' overhang	23.6	7' 6 1/2" - 6		
53.2 Bridge House	43.3 do forward	43.4	7' 0"		
51.3 FORE TRUNK	50.5 x 16.4 x 1.96	51.8	4' 8" x 8		
+ Raised Qr. Dk.	37.8 x 4.8 x 8	17.0	4' 3"		
19.12 AFT do	76.5 x 4.7 x 8	16.5	4' 3"		
19.0.42 Poop.....	37.63 x 4.87 x 8	19.1	7' 3" - 7' 6		
21.4.5 Total	119.5	244.5	= 489		
Length of Ship					
Corresponding percentage { Para. 11, 12, 13, or 14)	31.33%				

FREEBOARD recommended amidships from centre of Disc to top of Statutory Deck Line, Wood (Iron) Deck :—

Fresh Water Line	above centre of Disc
Indian Summer Line	" "
Winter Line	below "
Winter North Atlantic Line	" "

If the frames, skin planking, or ceiling are of unusual thickness the breadth of vessel to inside of ceiling should be reported if possible.

In vessels obtaining an allowance for deck erections under Para. 11 where the sheer drops abaft amidships the height of the R.Q.D. is to be taken from the level of the top of the amidships beam.

In flush-decked vessels the total standard mean sheer means the sheer measured at the stem and stern-post. In vessels having poops and forecastles, it means the sheer measured at points distant one-eighth of the vessel's length from stem and stern-post.

State dimensions of freeing port area on back of this form.

The Surveyor should state whether the fall in sheer as reported is measured relatively to the straight line of keel or to the water line. If measured relatively to water line the vessel's draft at time of survey, and also the usual load draft forward and aft should be reported.

W415-0094

Do all the Frames extend to the top height in the Poop? Yes
 Raised Quarter Deck? ✓
 Bridge House? Yes
 Forecastle? Yes
 To what height do the Reverse Frames extend? D.A. frames
 Has the Poop or Raised Quarter Deck an efficient Iron Bulkhead at the fore end? Yes
 Give particulars of the means for closing the openings in Bulkhead Hinged Steel door.
 Is the Poop or Raised Quarter Deck connected with the Bridge House? No
 Has the Bridge House an efficient Bulkhead at the fore end? Yes
 Give particulars of the means for closing the openings in Bulkhead None - no opening.
 What is the thickness of the Bridge Front plating? .24 and Coaming plate? .38
 Give scantlings and spacing of the Stiffeners 7 x 3 x 38 spaced 30 3/4"
 Are bracket plates fitted at each end of the Stiffeners? Lugged
 Are hor'l. brackets fitted connecting Bridge Bulk'd. with Bulwarks? Yes
 Has the Bridge House an efficient Iron Bulkhead at the after end? Yes
 How are the openings closed? Hinged Steel doors.
 Is the Forecastle at least as high as the main or top-gallant rail? Yes
 Has the Forecastle an efficient Iron or Wood Bulk'd. at after end? Yes
 Are the Engine and Boiler openings covered by a Bridge, Poop, Raised Quarter Deck, or enclosed by a Strong Iron or Steel Deckhouse? Yes
 If the openings are not so protected are the exposed parts of the Casings efficiently constructed?
 Give thickness of plating; scantlings and spacing of Stiffeners ✓
 What is the height of the exposed Casings? ✓ Are suitable means provided for closing all openings in them in bad weather?
 Are the Weather Deck Hatchways efficiently constructed and at least equal to the requirements of Section 28 of the Rules for 1904-5? Give particulars below:— as approved.

Position and	N° 1 31'-6" x 25'-6"	N° 2 30'-0" x 25'-6"	N° 3 31'-6" x 25'-6"	N° 4 31'-6" x 25'-6"	N° 5 27 x 25'-6"			
Item	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.
Height above top of DECK	4'-3"		4'-3"		4'-3"		4'-3"	
Sides.	.44		.44		.44		.44	
Thickness	✓		✓		✓		✓	
SHUFTING BEAMS OR WEB PLATES	Number 6	Section and Scantlings 192 x 38	6	do	✓	6	5	
Material	52 x 32 x 48	Steel	do	do	do	do	do	
* FORE AND AFTERS.	Number	Section and Scantlings						
Material								
HATCHES Thickness	3"		3"		3"		3"	
Remarks								

* The depth of Fore and Afters should be stated from the underside of the hatches in all cases.


(If the sill of the lowest side scuttle will be less than 6 inches above the Indian Summer Load Line if assigned under the tables, state vertical distance from top of deck at side amidships to lower edge of lowest side scuttle.)

The following information is to be given in all Cases of vessels dealt with under Paras. 11, 12 (under 15 feet Moulded depth) and under Shelter Deck Rules.

What is the thickness of the Bridge Sheerstrake? ✓ Strake between Main and Bridge Sheerstrakes?

Delete the words The Crew are, are not, berthed in the bridge house.
that do not apply The arrangements to enable them to get backwards and forwards from their quarters are, are not satisfactory.

Length of Bulwarks in well 160' Rule
Area of Freeing Ports required by Para. 11, each side of vessel = 52 Sq. ft.
Ft. Tenths. Ft. Tenths. No. 3.17 x 1.5 x 12 { Freeing Ports (each side of vessel) = 57 Sq. ft.
x x x Total deficiency or excess = - 7 Sq. ft.

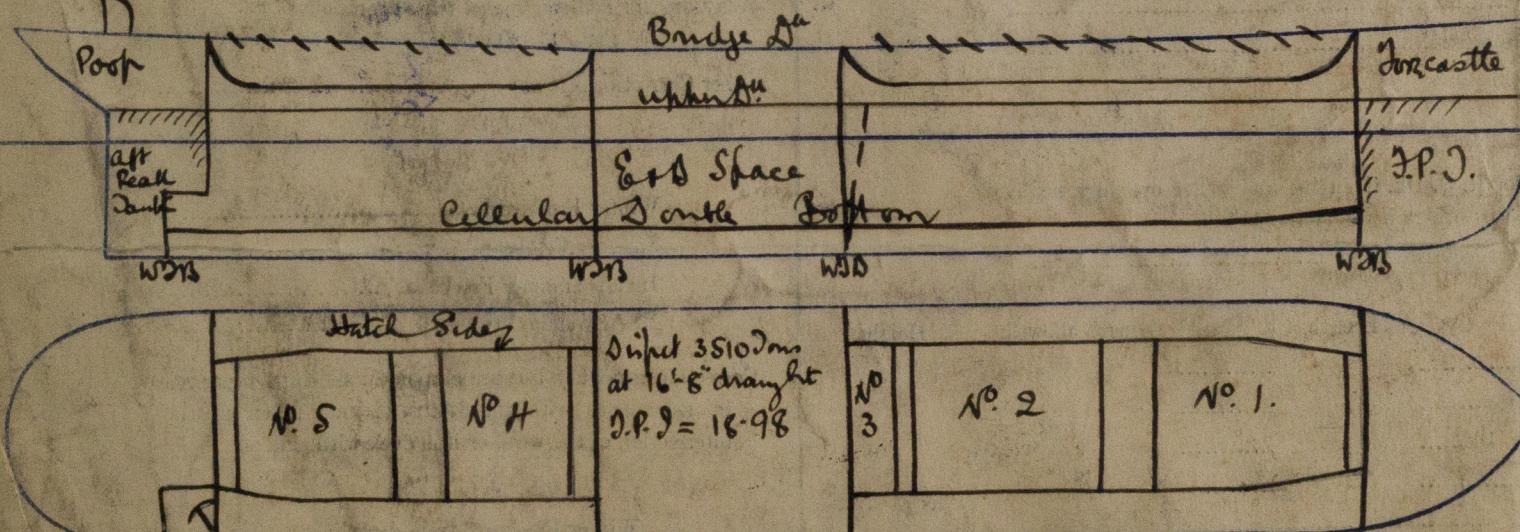

Show hereon line of Floors or Tank Top with position of any Breaks in same; also height of Peak Tank tops, &c., &c.

Note: The Approved plans are in the London Office.

State any special features in the construction of the Vessel Continuous cargo hatch sides - steel screw vessel-

bulb-angle framing.

Mess. Turner Ship & Co. N° 51 - Sister vessel to Same Builders N° 42 S.S. Bishopston.

Owners E. T. LINLEY

, Address LONDON.

Fee £ 6. 0. 0.

Received by me

See T. G. Report.



Lloyd's Register
Foundation