

COPY.

31 MAR 1947

Lloyd's Register of Shipping

COPY FOR LONDON

Port of Vancouver, B. C.,

24th February, 1947.

PROVISIONAL LOAD LINE CERTIFICATE.

This is to Certify that

D. J. ARCHIBALD.

the undersigned Surveyor to this Society did at the request of the Owner's Representative, Survey the Steel Screw Motorship "ISLAND COMMANDER", 271 tons gross of Vancouver, B. C., in accordance with Article 14 of the International Load Line Convention, 1930 for Periodical Survey, and the Survey has been completed to my satisfaction.

The freeboards assigned to the ship by the Committee of Lloyd's Register, marked on the ship's side and now verified by the undersigned are as follows:-

	<u>FREEBOARD FROM DECK LINE</u>	<u>LOAD LINE.</u>
Tropical	1' - 9-1/2" (T)	3" above S.
Summer	2' - 0-1/2" (S)	Upper edge of line through centre of disc.
Winter	2' - 3-1/2" (W)	3" below S.
Winter North Atlantic	2' - 5-1/2" (W.N.A.)	5" below S.


Allowance for fresh water for all freeboards - 3 inches.

The upper edge of the deck line from which these freeboards are measured is at the level of the wood deck 3" above the top of the steel raised quarter deck at side.

This certificate is Provisional and is valid only until a new certificate is issued by the Committee of Lloyd's

This Certificate is issued upon the terms of the Rules and Regulations of the Society, which provide that:

"While the Committees of the Society use their best endeavours to ensure that the functions of the Society are properly executed, it is to be understood that neither the Society nor any Member of any of its Committees is under any circumstances whatever to be held responsible for any inaccuracy in any report or certificate issued by the Society or its Surveyors, or in any entry in the Register Book or other publication of the Society, or for any error of judgment, default or negligence of any of its Committees or any Member thereof, or the Surveyors, or other Officers or Agents of the Society."

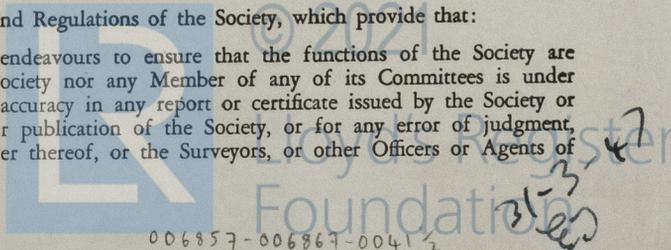

II



Register, London, or for a period not exceeding six months.

[Handwritten flourish]

(Sgd.). D. J. Archibald.
SURVEYOR TO LLOYD'S REGISTER.

the und
the Gene
"ISLAND
accord
Convent
compl
Commis
Hon ve
I
Tropi
Summe
Winte
Winte
Arlan
Allo
freed
above
wast

This Certif
"While the
roperly execu
ny circumstan
s surveyors or
efault or neglig
the Society."
RPT. 10)



© 2021

Lloyd's Register
Foundation