






Do all the Frames extend to the top Height in the S ☒ *Yes*  
 Do all the Frames extend to the top height in the P ☒ *Yes*  
 To what height do the Reverse Frames extend? *to the end*  
 Has the Poop an efficient Iron Bulkhead at the *ends* in Bulkhead ☒  
 Give particulars of the means for closing the *doors* in Bulkhead ☒  
 Is the Poop connected with the Bridge House *by* in Bulkhead ☒  
 Give particulars of the means for closing the *doors* in Bulkhead ☒  
 What is the thickness of the Bridge Floor *plates* ☒  
 Give scantlings and spacing of the St *iffeners* ☒  
 Are bracket plates fitted at each end *of* Bulkhead at the after end? ☒  
 Has the Bridge *opening* closed? ☒  
 How are the *castles* least as high as the main or top-gallant rail? ☒  
 Is the *Engine* d Boiler openings covered by a *Bridge, Poop,* ☒  
 Are the *openings* not so protected are the exposed parts of the Casings efficiently constructed? ☒  
 Give thickness of plating: scantlings and spacing of Stiffeners ☒  
 What is the height of the exposed Casings? *7'0"* Are suitable means provided for closing all openings in them in bad weather? *Yes*  
 Are the Weather Deck Hatchways efficiently constructed and at least equal to the *Yes*  
 requirements of Section 28 of the Rules for 1904-5? Give particulars below:—

Position and Size.	No. 1. 26'0" x 22'0"		No. 2. 30'4" x 22'0"		No. 3. 23'10" x 22'0"		No. 4. 5'6" x 26'0" x 22'0"			
Item.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.
Height above top of DECK	32	24	32	24	32	24	32	24		
Thickness	Sides	44	44	44	44	44	44	44		
	Ends	44	44	44	44	44	44	44		
LIFTING BEAMS OR OVER PLATES	Number	5	5	6	6	4	4	5	5	
	Section and Scantlings	4 ANGLES 4x3x44 PLATE 19x9 1/2x36		SAME AS No. 1 Hatch						
	Material	STEEL								
# FORE AND AFTERS	Number									
	Section and Scantlings	No		FORE AND		HATCH				
	Material									
HATCHES Thickness	3	2 1/2	3	2 1/2	3	2 1/2	3	2 1/2		
Remarks	SATISFACTORY									

\* When the Fore and Afters are of wood the depth should be stated from the underside of the hatches.

(If the sill of the lowest side scuttle will be less than 6 inches above the Indian Summer Load Line if assigned under the tables, state vertical distance from top of deck at side amidships to lower edge of lowest side scuttle.)

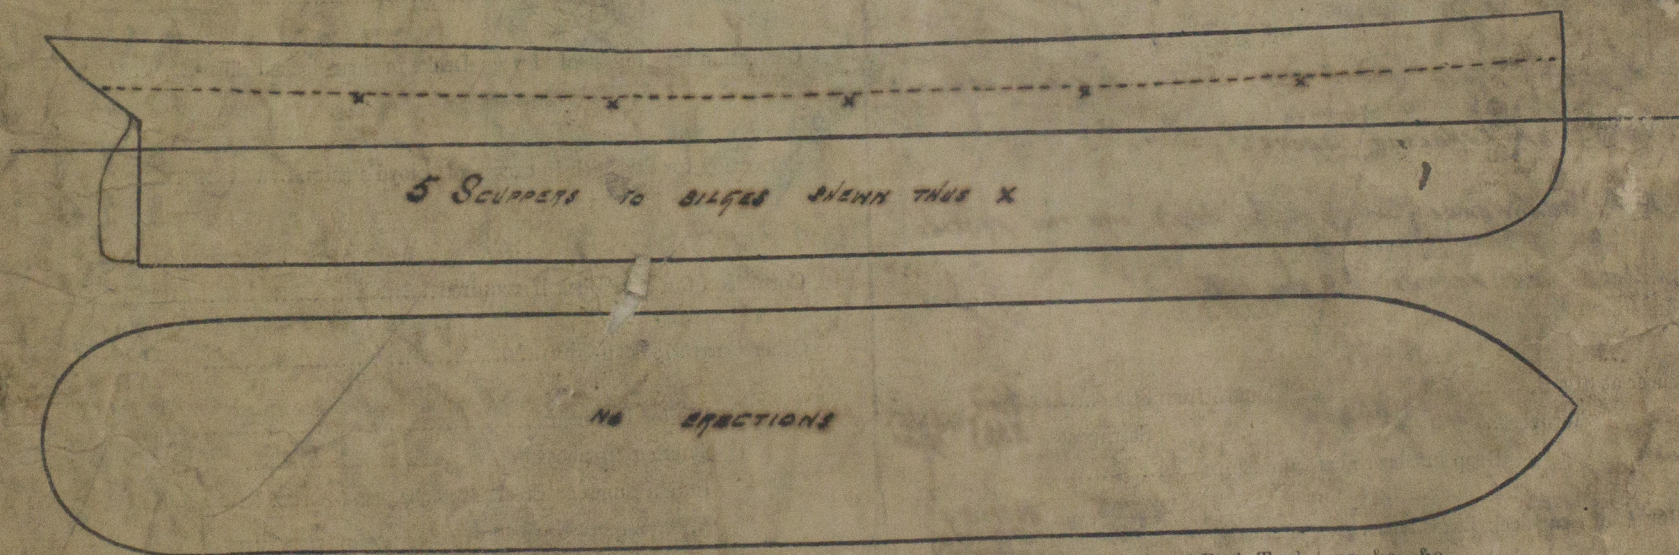

Show hereon line of Floors or Tank Top with position of any Breaks in same; also height of Peak Tank tops, &c., &c.

State any special features in the construction of the Vessel *THIS VESSEL IS A DUPLICATE OF THE SAME BUILDERS No 546*  
*S.S. "GRANDE GARDE" SLO. REPORT No. 27937. THE APPROVED PLANS ARE ENCLOSED FOR REFERENCE*  
*NO SCUTTLES OR OTHER OPENINGS ARE CUT IN THE VESSEL'S SIDES TO EFFECT THE POSITION OF THE LOADING DISC*  
*THE HATCHWAY SUPPORTS ON SHELTER DECK ARE IN ACCORDANCE WITH TABLE A. SECTION 32 OF THE RULES*  
*THE ENGINE AND BOILER CASINGS ON SHELTER DECK, WHERE EXPOSED ARE CONSTRUCTED AS FOR AN UPPER DECK CASING*

Owners

Address

Fee £ 12 : 0 : 0

Received by me

Will be charged on completion



Lloyd's Register  
Foundation