

REPORT ON ELECTRIC FITTINGS.

(OTHER THAN FOR THE PROPULSION OF THE VESSEL)

Date of writing Report 19 When handed in at Local Office 22nd May 1928 Port of Belfast
 No. in Survey held at Belfast Date, First Survey 6th Feb. Last Survey 10th May 1928
 Reg. Book. (Number of Visits.....)
 1515 on the STEEL SC KING ARTHUR Tons { Gross 227
 Net 3139
 Built at Belfast By whom built Harland & Wolff Ltd. Yard No. 763 When built 1928
 Owners King Line Ltd. (Dodd, Hansen & Co. Ltd.) Port belonging to London
 Electric Light Installation fitted by Harland & Wolff Ltd. Contract No. 763 When fitted 1928.

System of Distribution Two Wire Direct Current to Masterboards and Distribution Boxes
 Pressure of supply for Lighting 220 volts, Heating 220 volts, Power 220 volts.
 Direct or Alternating Current, Lighting Direct Power Direct
 If alternating current system, state frequency of periods per second —
 Has the Automatic Governor been tested and found efficient when the whole load is suddenly thrown on or off Yes
 Generators, do they comply with the requirements regarding overload Yes, are they compound wound Yes
 are they over compounded 5 per cent. Yes, if not compound wound state distance between each generator —
 Where more than one generator is fitted are they arranged to run in parallel Yes, is an adjustable regulating resistance fitted in series with each shunt field Yes
 Are all terminals accessible and clearly marked Yes, are they so spaced or shielded that they cannot be accidentally earthed, or short circuited Yes Are the lubricating arrangements of the generators as per Rule Yes
 Position of Generators Port Side of Motor Room
 is the ventilation in way of the generators satisfactory Yes, are they clear of all inflammable material Yes
 if situated near unprotected woodwork or other combustible material, state distance of same horizontally from or vertically above the generators — and —, are the generators protected from mechanical injury and damage from water, steam or oil Yes
 are their axis of rotation fore and aft Yes
 Earthing, are the bedplates and frames of the generating plant efficiently earthed Yes are the prime movers and their respective generators in metallic contact Yes
 Main Switch Boards, where placed On Switchboard Platform in Motor Room
 If the generators and main switchboard are not placed in the same compartment, is each generator provided with a fuse on each insulated pole as near as possible to the terminals of the generator, additional to that provided on the main switchboard —
 Switchboards, are they placed in accessible positions, free from inflammable gases and acid fumes Yes
 are they protected from mechanical injury and damage from water, steam or oil Yes, if situated near unprotected woodwork or other combustible material, state distance of same horizontally from or vertically above the switchboards — and —
 are they constructed wholly of durable, incombustible non-absorbent materials Yes, is all insulation of high dielectric strength and of permanently high insulation resistance Yes, if semi-insulating material is used, are all conducting parts connected to one pole insulated from the slab with mica or micanite and the slab similarly insulated from its framework —, and is the frame effectively earthed Yes
 Are the following fittings as per Rule, viz.:— spacing or shielding of live parts Yes, accessibility of all parts Yes, absence of fuses on back of board Yes, proportion of omnibus bars Yes, individual fuses to voltmeter, pilot or earth lamp. Yes, connections of switches Yes
 Main Switchgear, description of switchgear for each generator and each outgoing circuit, and arrangement of equalizer switches For Each Generator
 a Double Pole Overload & Reverse Current Circuit Breaker with interlocked Single Pole Switch for Equalizer & for each outgoing feeder Double Pole Fuses & Single Pole Switch
 Instruments on main switchboard Three ammeters Two voltmeters Arranged for paralleling purposes.
 Earth Testing, state what means are provided at the main switchboard for indicating the state of the insulation of the system
 One Set of Earth Lamps
 Switches, Circuit Breakers and Fusible Cut-outs, do these comply with the requirements of the Rules Yes
 Section and Distribution Boards, is the construction, protection, insulation, material, and position of these as per rule Yes



© 2020

 Lloyd's Register
 Foundation
 W46-0209(1/2)

Insulation of Cables, state type of cables, single or twin Single are the cables insulated and protected as per Tables III or IV of the Rules Yes
Fall of Pressure, state maximum between bus bars and any point of the installation under maximum load 8 Volts
Cable Sockets and other connections, are the ends of all cables having a sectional area of 0.007 square inch and above provided with soldering sockets Yes
Paper Insulated Cables, If cables are paper covered, is the dielectric at the exposed ends of the conductor protected from moisture by being suitably sealed with insulating compound —
Cable Runs, are the cables fixed as far as possible in accessible positions not exposed to drip or accumulation of water or oil, or to high temperature from boilers, steam pipes, uptakes or other hot objects, or to avoidable risk of mechanical damage Yes
Support and Protection of Cables, state how the cables are supported and protected Throughout ship Lead Covered cables are clipped to Perforated Plating & where run along decks cables are drawn into pipes
If cables are run in wood casings, are the casings and caps secured by screws —, are the cap screws of brass —, are the cables run in separate grooves — If armoured and lead covered cables are secured by metal clips, are the clips spaced as per Table VI Yes
Refrigerated Chambers, if lights are fitted, are the cables and fittings in accordance with the special requirements —
Joints in Cables, state if any, and how made, insulated, and protected Yes in properly constructed Junction Boxes
Watertight Glands and Deck Tubes, are all cables passing through decks and watertight bulkheads provided with deck tubes or watertight glands Yes
Bushes in Beams and Non-watertight Positions, where unarmoured cables pass through beams and non-watertight partitions, are the holes efficiently bushed Yes state the material of which the bushes are made Lead
Earthing Connections, state what earthing connections are fitted and their respective sectional areas all portable apparatus earthed with a conductor equal in cross section to the working conductor
are their connections made as per Rule Yes
Alternative Lighting, are the groups of lights in the propelling machinery space arranged as per Rule Yes
Emergency Supply, state position and method of control of the emergency supply and how the generator is driven —
Navigation Lamps, are these separately wired Yes, controlled by separate switch and separate fuses Yes
are the fuses double pole Yes, are the switches and fuses grouped in a position accessible only to the officers on watch Yes
has each navigation lamp an automatic indicator as per Rule Yes, are separate screens provided for the use of oil and electric side lights Yes
are separate oil lanterns provided for the mast head lights and side lights Yes
Fittings, are all fittings on weather decks, in stokeholds and engine rooms and wherever exposed to drip or condensed moisture, watertight Yes
are any fittings placed in spaces in which goods are liable to be stacked in close proximity to them; if so, how are they protected —
are any fittings placed in spaces where inflammable or explosive dust or gases are liable to be present, if so, how are they protected —
how are the cables led —
where are the controlling switches situated —
Searchlight Lamps, No. of —, whether fixed or portable —, are their fittings as per Rule —
Arc Lamps, other than searchlight lamps, No. of —, are their live parts insulated from the frame or case —, are their fittings as per Rule —
Motors, are their working parts readily accessible Yes, are the coils self-contained and readily removable for replacement Yes
are the brushes, brush holders, terminals and lubricating arrangements as per Rule Yes, are the motors placed in well-ventilated compartments in which inflammable gases cannot accumulate and clear of all inflammable material Yes
are they protected from mechanical injury and damage from water, steam or oil Yes are their axis of rotation fore and aft Yes
if situated near unprotected woodwork or other combustible material, are the motors of the totally enclosed, pipe ventilated, forced draught, drip or flame proof type —
if not of this type, state distance of the combustible material horizontally or vertically above the motors — and —
Control Gear and Resistances, are the generator field and motor speed regulators, starters and controllers constructed as per Rule Yes
Lightning Conductors, where lightning conductors are required, are these fitted as per Rule —
Ships carrying Oil having a Flash Point less than 150° F. Have the special requirements of the Rules been complied with regarding switches, joint boxes, section and distribution boards, protection of cables, method of distribution, lead of cables, lights and fittings —
If portable lamps for use in dangerous spaces are supplied, are they of a type approved by the Home Office —

PARTICULARS OF GENERATING PLANT.									
DESCRIPTION OF GENERATOR.	No. of	RATED AT				DRIVEN BY.	WHERE DRIVEN BY AN INTERNAL COMBUSTION ENGINE.		
		Kilowatts.	Volts.	Amperes.	Revs. per Min.		Fuel Used.	Flash Point of Fuel.	
MAIN ...	3	65	220	295	300	Diesel Engine	—	—	—
AUXILIARY ...	—	—	—	—	—	—	—	—	—
EMERGENCY ...	—	—	—	—	—	—	—	—	—
ROTARY TRANSFORMER	—	—	—	—	—	—	—	—	—


LIGHTING AND HEATING CONDUCTORS.									
Ref. No.	DESCRIPTION.	No. of Conductors.	Effective Area of each Conductor. Sq. Ins.	COMPOSITION OF STRAND.		Total Maximum Current. Amperes.	Approximate Length. (Lead and Return.) Feet.	Insulated with	HOW PROTECTED.
				No.	Diameter.				
—	MAIN GENERATOR...	2	2(0.15)	2(37)	0.072	295	90	Rubber	Lead Covered
—	AUXILIARY GENERATOR	—	—	—	—	—	—	—	—
—	EMERGENCY GENERATOR	—	—	—	—	—	—	—	—
—	ROTARY TRANSFORMER...	—	—	—	—	—	—	—	—
—	AUXILIARY SWITCHBOARDS...	—	—	—	—	—	—	—	—
—	ENGINE ROOM	—	—	—	—	—	—	—	—
—	BOILER ROOM	—	—	—	—	—	—	—	—
—	MASTERBOARD "A" & "B" POWER	1	0.2	37	0.083	184	430	Rubber	Lead Covered
—	MASTERBOARD "B" COOKING	1	0.04	19	0.052	66	80	"	"
—	MASTERBOARD "B" LIGHTING	1	0.01	7	0.044	28	80	"	"
—	MASTERBOARD "B" HEATING	1	0.12	37	0.064	133	80	"	"
—	MASTERBOARD "C" POWER	1	0.12	37	0.064	123	600	"	"
—	WIRELESS	1	0.007	7	0.036	4.55	370	Rubber	Lead Covered
—	SEARCHLIGHT	—	—	—	—	—	—	—	—
—	MASTHEAD LIGHT...	1	0.003	1	0.064	0.45	384	Rubber	Lead Covered
—	SIDE LIGHTS...	1	0.003	3	0.036	0.45	160	"	"
—	COMPASS LIGHTS...	1	0.003	3	0.036	0.29	65	"	"
—	POOP LIGHTS	—	—	—	—	—	—	—	—
—	CARGO LIGHTS	1	0.003	3	0.036	0.68	100	Rubber	Lead Covered
—	ARC LAMPS	—	—	—	—	—	—	—	—
—	HEATERS	1	0.003	3	0.036	5.45	90	Rubber	Lead Covered

MOTOR CONDUCTORS.									
Ref. No.	DESCRIPTION.	No. of Motors.	Effective Area of each Conductor. Sq. Ins.	COMPOSITION OF STRAND.		Total Maximum Current. Amperes.	Approximate Length. (Lead and Return.) Feet.	Insulated with	HOW PROTECTED.
				No.	Diameter.				
—	BALLAST PUMP	2	0.03	19	0.044	55	150	Rubber	Lead Covered
—	MAIN BILGE LINE PUMPS	1	0.01	7	0.044	30	260	Rubber	Lead Covered
—	GENERAL SERVICE PUMP	—	—	—	—	—	—	—	—
—	EMERGENCY BILGE PUMP	—	—	—	—	—	—	—	—
—	SANITARY PUMP	—	—	—	—	—	—	—	—
—	CIRC. SEA WATER PUMPS	2	0.03	19	0.044	51	200	Rubber	Lead Covered
—	CIRC. FRESH WATER PUMPS	—	—	—	—	—	—	—	—
—	AIR COMPRESSOR	—	—	—	—	—	—	—	—
—	FRESH WATER PUMP	—	—	—	—	—	—	—	—
—	ENGINE TURNING GEAR	1	0.0145	7	0.052	40	100	Rubber	Lead Covered
—	ENGINE REVERSING GEAR	—	—	—	—	—	—	—	—
—	LUBRICATING OIL PUMPS	2	0.04	19	0.052	68	240	Rubber	Lead Covered
—	OIL FUEL TRANSFER PUMP	1	0.007	7	0.036	17	200	"	"
—	WINDLASS	1	0.2	37	0.083	184	544	"	"
—	WINCHES, FORWARD	6	0.06	19	0.064	94	72	"	"
—	WINCHES, AFT	6	0.06	19	0.064	94	72	"	"
—	STEERING GEAR	1	0.03	19	0.044	60	496	"	"
—	WORKSHOP MOTOR	2	0.003	3	0.036	8.2	24	"	"
—	VENTILATING FANS	—	—	—	—	—	—	—	—
—	OIL PURIFIERS	2	0.003	3	0.036	8.5	250	Rubber	Lead Covered
—	WARPING WINCH	1	0.12	37	0.064	140	384	"	"

All Conductors are of annealed copper conforming to British Standard Specification No. 7.

The Insulated Conductors are guaranteed to withstand the immersion and resistance tests specified in the Rules.

The foregoing is a correct description.

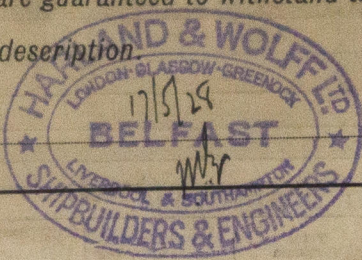

Electrical Engineers.

Date 17-5-28.

COMPASSES.

Distance between electric generators or motors and standard compass 120 feet to generator & 64 feet to nearest motor

Distance between electric generators or motors and steering compass 120 feet to generator & 52 feet to nearest motor

The nearest cables to the compasses are as follows:—

A cable carrying 4.6 Ampères 7 feet from standard compass 7 feet from steering compass.

A cable carrying 16.3 Ampères 18 feet from standard compass 16 feet from steering compass.

A cable carrying 50.0 Ampères 26 feet from standard compass 18 feet from steering compass.

Have the compasses been adjusted with and without the electric installation at work at full power Yes

Has the effect of switching on and off circuits, motors and other electro-magnetic apparatus within the vicinity of the compasses been noted Yes

The maximum deviation due to electric currents was found to be nil degrees on all course in the case of the standard compass, and nil degrees on all course in the case of the steering compass.



Builder's Signature.

Date 17-5-28.

Is this installation a duplicate of a previous case Yes If so, state name of vessel "King Neptune"

General Remarks (State quality of workmanship, opinions as to class, etc.)

This work has been done under special survey. The materials and workmanship are sound and good. The installation has been fitted in accordance with the rules and tried out under full working conditions. The vessel is now eligible, in my opinion, for notation "Electric light."

It is submitted that this vessel is eligible for THE RECORD.

Elec. light.

J.M.

24/5/28.

Total Capacity of Generators 195 Kilowatts

The amount of Fee ... £ 36 : 5 : 22 May 1928

Travelling Expenses (if any) £ :

When applied for, 22 May 1928
When received, 29.5.28

R. Lee Ames

Surveyor to Lloyd's Register of Shipping.

Committee's Minute

FRI. 25 MAY 1928

Assigned

Elec. light



© 2020

Lloyd's Register Foundation